



PanelLight


Side Edge Type

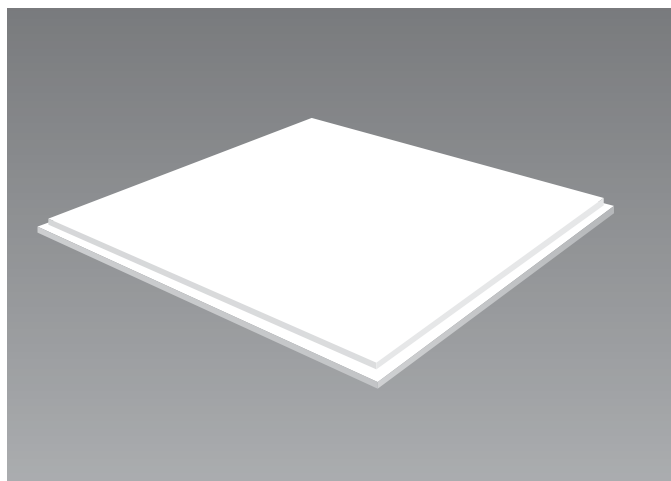

PL660

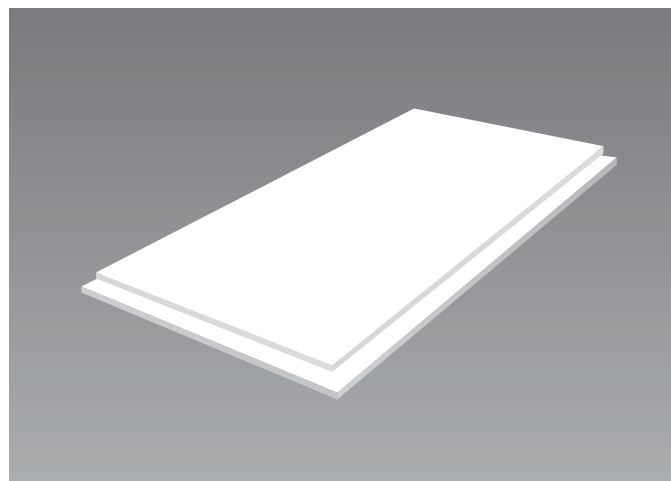

PL1230

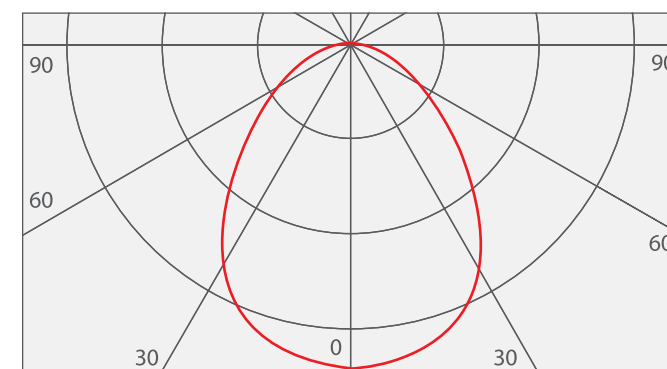

— C0 / C180
- - - C90 / C270

cd / 1000 lm


감성조명 기능 (색온도 조절 타입)

입력전압(V) : AC100~240V, 50~60Hz
설 치 : T-bar / M-bar
빔각도 (°) : 90°
역 율 : 0.9 이상
제 어 : 리모컨/벽스위치

ON/OFF (온/오프 타입)

입력전압(V) : AC100~240V, 50~60Hz
빔각도 (°) : 120°
역 율 : 0.95
수 명 : 30,000 hrs

규격

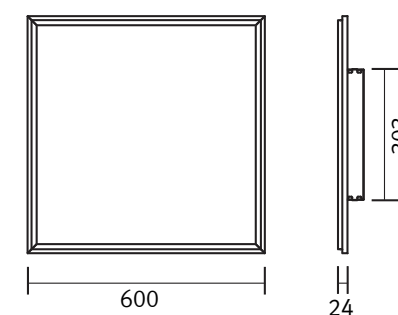

모델명 Model No.	소비전력 Wattage(W)	사이즈 가로x세로x높이(mm)	광 속 lm(CW기준)	색온도 ColorTemp.(K)	타공사이즈 Cut out(mm)	무 게 Kg
PL 660S(L)	54W	600x600x24	3024	2700~6500	554x554	7.4
PL 1230S(L)	84W	320x1280x24	3024	2700~6500	275x1235	9.8

사양



모델명 Model No.	소비전력 Wattage(W)	사이즈 (mm)	광 속 lm	색온도 ColorTemp.(K)
PL 660S(L)	50/70W	603x603	3584 / 4992	4000/6000
PL 1230S(L)	50/70W	1200x300	2688/3584/4992	4000/6000