



CapStreet-01





CapStreet-02


CapStreet

applications Street Light / Guide Light / Tunnel Light

규격

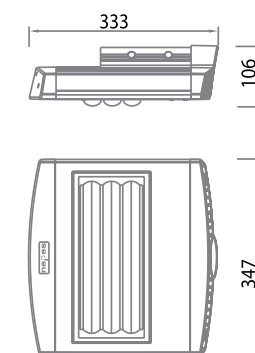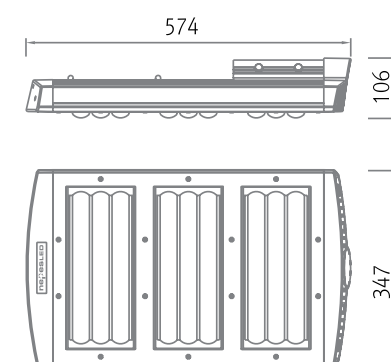


Polar Luminous Intensity Distribution

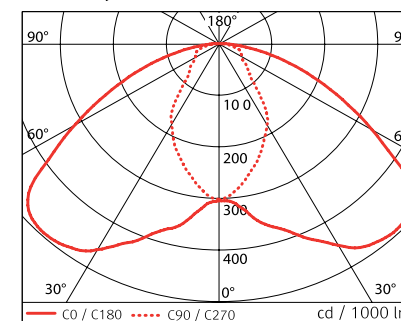

Conical illuminance

173°	m	lux
2	915	
4	229	
6	102	
8	57	
10	37	

Polar Luminous Intensity Distribution

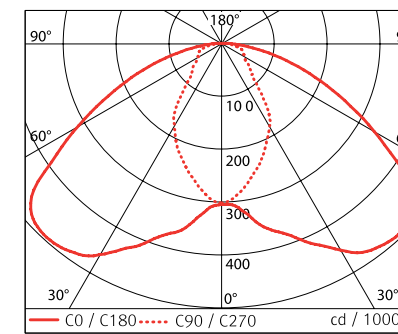

Conical illuminance

173°	m	lux
2	305	
4	76	
6	40	
8	19	

사양

Model No.	Power (W)	Color Temp. CCT (K)	Luminous Flux (lm)	Beam Angle. (°)	Color Rendering CRI (Ra)	Weight (kg)	Size (mm)	Out Box
Cap Street-01	150	3000	10980	130	70	9.5	574x347x106	1
		4000	11400					
		6500	12000					
Cap Street-02	100	3000	7320	130	70	8	498x347x106	1
		4000	7600					
		6500	8000					
Cap Street-03	50	3000	3660	130	70	6.2	333x347x106	1
		4000	3800					
		6500	4000					

Luminous flux difference within +/- 10%

CCT= 6500K, 5700K, 4500K, 4000K, 3500K, 3000K, 2700K