

FEELED Premier Spot 60



• Black



• White

Premier Series CRI Ra Values

														
Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
97	99	99	95	95	98	98	97	96	90	97	93	96	99	96

특징


연색지수 (CRI) : Ra95
 전광속 : 630 lm @ 3,000K
 광효율 : 70 lm/W
 입력전력 : 9 W
 입력전류 : 0.5A (반드시 정전류 컨버터를 사용하십시오.)
 작동온도 : 0~45℃
 수명 : 40,000hr / 70%
 색온도 : 2,700K/3,000K/3,500K/4,000K

Beam angle (field angle)



규격


표준제품

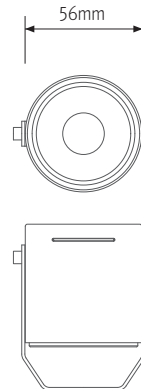

설치방법




LED Converter

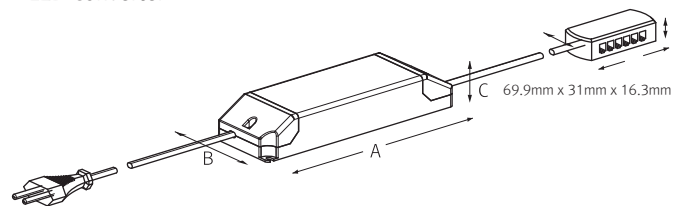

Model name	A (mm)	B (mm)	C (mm)
FLC30-24V/K	150	41	31
FLC75-24V/K	180	60	32

직하조도 및 배광곡선

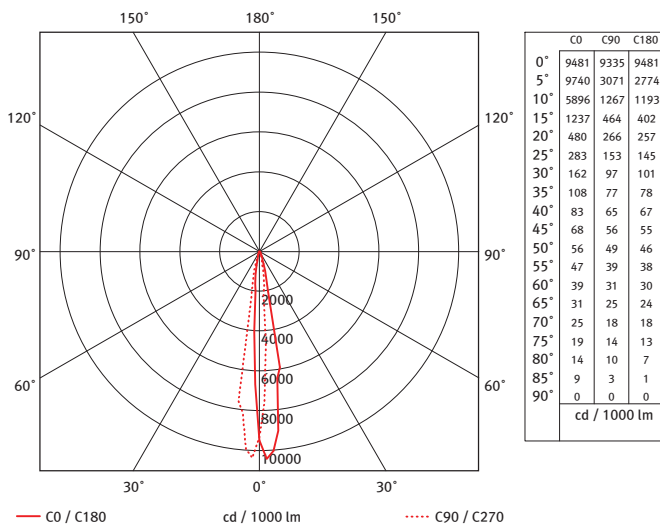

악세사리

① LED converter (1800mm)

Part No	FLC30-24V/K	FLC75-24V/K
Capacity	30W 24V	75W 24V

