

# FLX Stix NDFree

No more transformer with FLX Stix NDFree

Slim, Simple, Safe!



- Easy and quick installation, Long connection
- LED driver is not required (AC Direct Powered)
- Innovative Slim design
- Safe connection with locking system
- No dark spot at the linkage point for seamless effect
- Line voltage dimming





### FLX Stix NDFree Standard Output




### Specification


Model Name	Power Input	Lamp Power	Power Factor	Lumens	Energy Efficiency	Color Rendering	Available Color	Operating temperature
NDF4 40K-230V-C90	AC 220-240V	4 W	PF > 0.9	340 lm	85 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF8 40K-230V-C90	AC 220-240V	8 W	PF > 0.9	720 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF12 40K-230V-C90	AC 220-240V	12 W	PF > 0.9	1,080 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF16 40K-230V-C90	AC 220-240V	16 W	PF > 0.9	1,440 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C

### Dimension

Model Name	Voltage Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
NDF4 40K-230V-C90	AC 220-240V	4	282.5	291.5	314	19	18	18	16.8
NDF8 40K-230V-C90	AC 220-240V	8	560.5	569.5	592	19	18	18	16.8
NDF12 40K-230V-C90	AC 220-240V	12	839	848	870.5	19	18	18	16.8
NDF16 40K-230V-C90	AC 220-240V	16	1,117	1,126	1,148.5	19	18	18	16.8

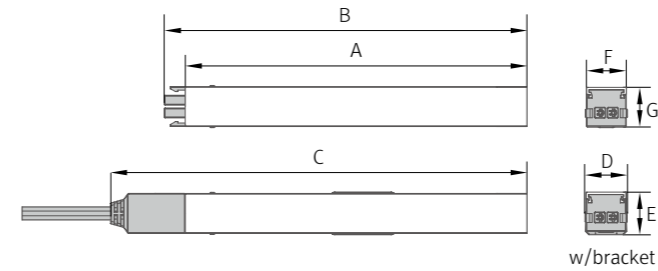


### Installation

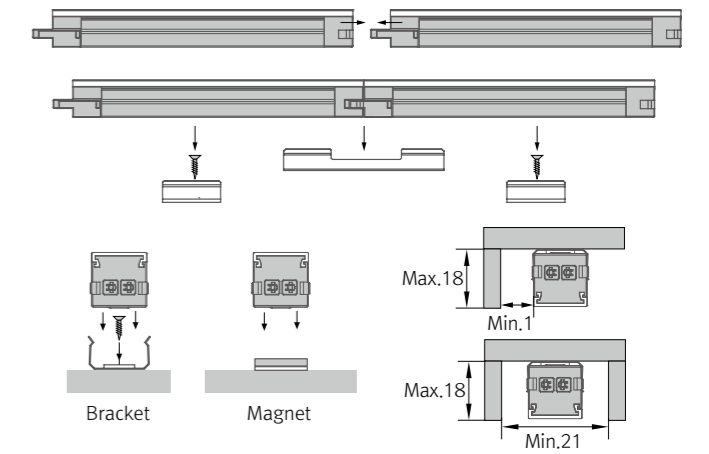

### Max. connection

- 400W in one row (single power feed)

### Connection

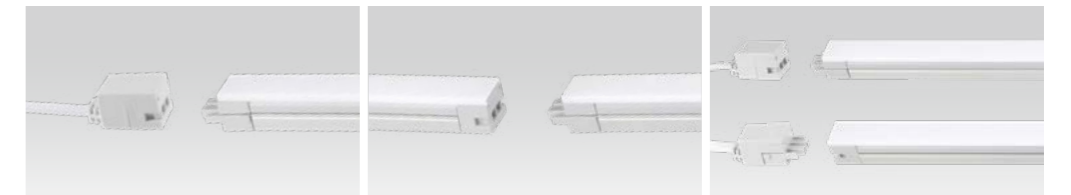

### Accessories

#### Ⓐ Connecting cable : NDFPTC/T

NDFPTC/T	NDFPTC1/T	NDFPTC2/T	NDFPTC4/T	NDFPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

#### Ⓑ Open power cord : NDFOPC/T (1,800mm)

#### Ⓒ Power cord : NDFPC/T (1,800mm)

#### Ⓓ Mounting brackets : NDF-BRACKET1

#### Ⓔ Angle bracket (15° & 40°) : NDF-BRACKET2

#### Ⓜ Connecting bracket : NDF-BRACKET3

#### Ⓝ End Cap : NDF-CAP

