


FEELUX



More Slim !

FEELUX **DIVA 2** series

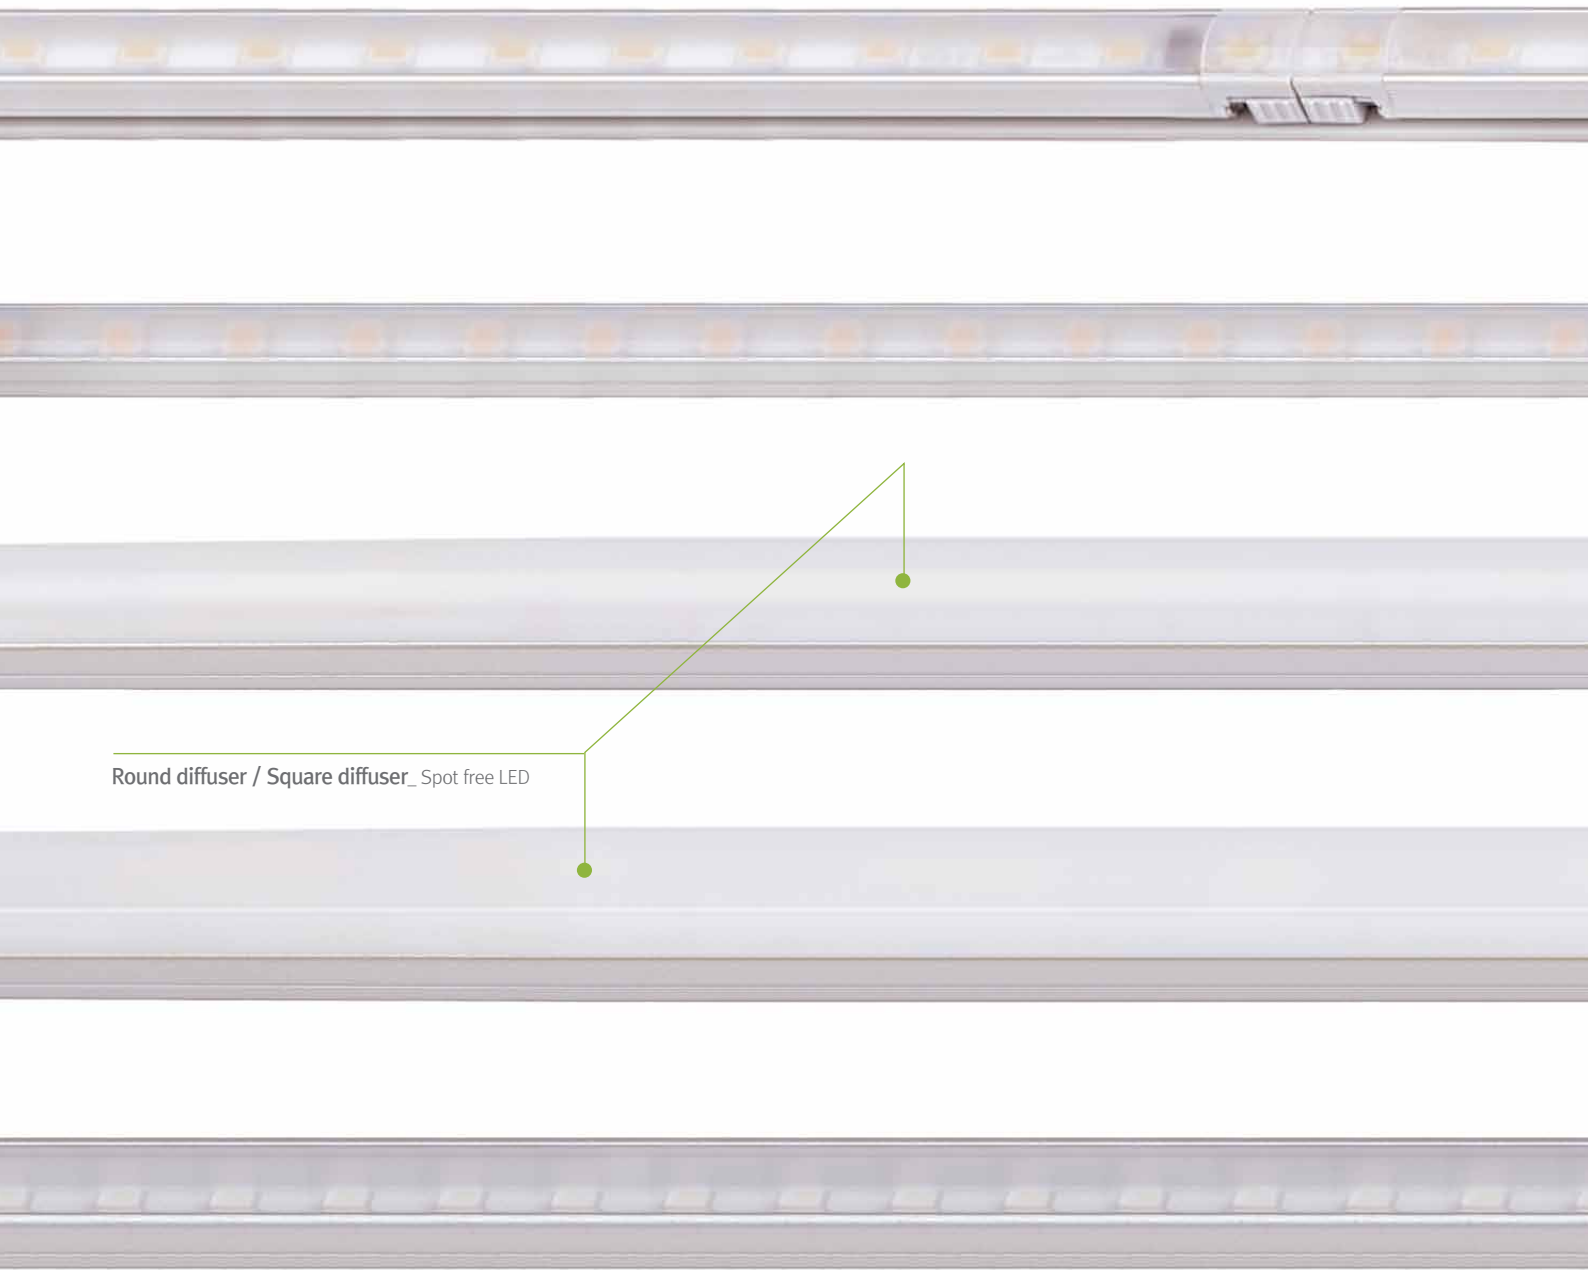

Round diffuser / Square diffuser_ Spot free LED

Change your Light, Change your Life!

LED for Display, Cabinet, Furniture & Cove



MonoRail
Display & Cove system for long runs!

06



DIVA 2
Little light, Big punch!

14



DIVA 2 HO
Little light, Bigger punch!

20



DIVA 2 DUAL
Dynamic white LED

26



DIVA 2 RGB
Color changing LED

34



DIVA 2 Spot
Recessed & Surface mount LED puck

42



*Display & Cove system for
long runs!*

MonoRail

FEELUX



FEELUX

MonoRail

LED for Display, Cabinet, Furniture & Cove

Display & Cove system for long runs!





Product Features

- Super Slim liner with power track
- Greatly extends the length of a run with a single power point
- Fixtures snaps onto power track with no breaks in light output
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr / 70%
- Available color : 2700K, 3000K, 3500K, 4000K, 6000K
- Color rendering : Ra > 80
- Energy efficiency : 75lm/W
- Degree of protection : IP20





MonoRail

Display& Cove System for Long runs!



MonoRail 1W Length (95mm)




MonoRail 3W Length (286mm)



Rail (power supply track)

Easy connection

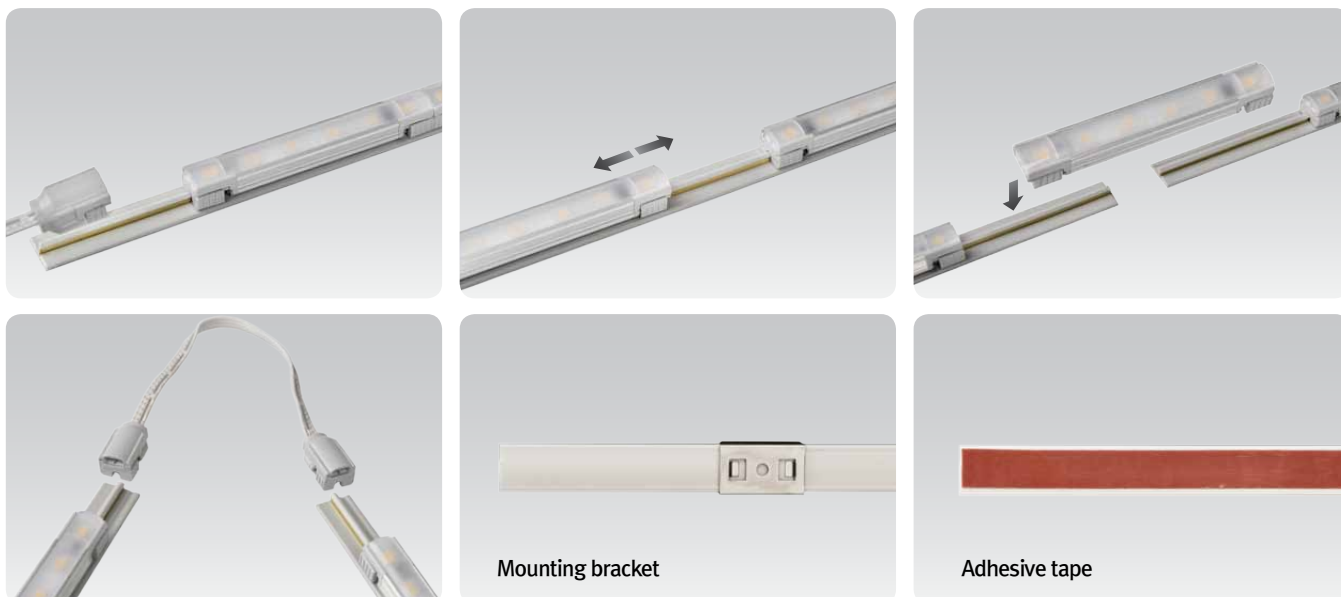


Max. connection

- MonoRail :200W in one row (Single powerfeed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver	
	24V/75W	24V/180W
DVR1A4B24M	57	138
DVR3A4B24M	20	48

Dimension

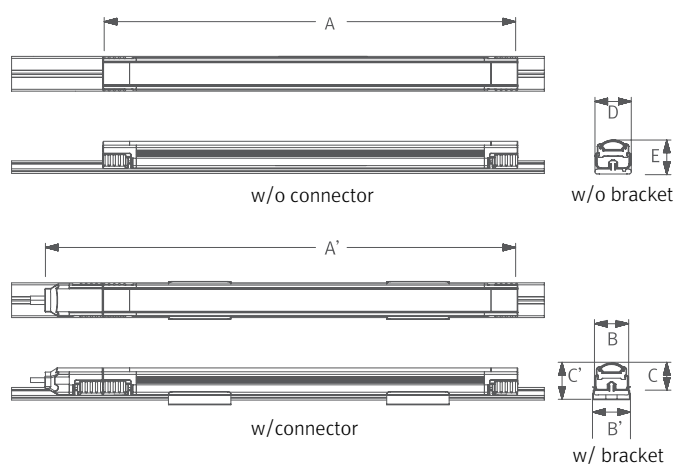

Model Name	Power Input (V)	Lamp Power (W)	A (mm)	A' (mm)	B (mm)	B' (mm)	C (mm)	C' (mm)	D (mm)	E (mm)
DVR1A4B24M	DC 24	1.3	95	121	15.3	17	12.3	16.6	15.6	14.6
DVR3A4B24M	DC 24	3.7	286	312	15.3	17	12.3	16.6	15.6	14.6

Rail power track– supply power to other electrics



Accessories

Ⓐ Rail (Power supply track)

DVR–Rail

Ⓑ Power supply cable to the Rail

DVRPC : 2500mm

Ⓒ Connecting cable between rails

DVRPTC	DVRPTC1	DVRPTC2	DVRPTC4	DVRPTC6
150mm(6inch)	300mm(1feet)	600mm(1feet)	1200mm(4feet)	1800mm(6feet)

Ⓓ Connecting cable between Rail and Diva2 : DVRPTC–NDV

DVRPTC–NDV1	DVRPTC–NDV2
300mm(1feet)	600mm (2feet)

Ⓔ Connecting cable between Rail and Diva2 HO&Dual : DVRPTC–HDV

DVRPTC–HDV1	DVRPTC–HDV2
300mm(1feet)	600mm (2feet)




Ⓘ Sidefeed for seamless extension(1W) : DVR1A4B24M/S

Ⓙ LED Driver with 6way distributor, with power cord(1800mm)

Part No	FLC75–24V/T	FLC180–24V/T
Capacity	75W 24V	180W 24V

Ⓚ Rail bracket : DVR–BRACKET1

Ⓛ End cap : DVR–CAP

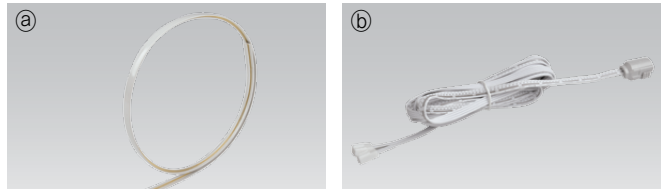





More slim, Better design!!

LED for Display, Cabinet, Furniture & Cove

DIVA 2 / HO / DUAL

FEELUX



FEELUX

DIVA 2

LED for Display, Cabinet, Furniture & Cove

Little light, Big punch!!






Product Features


- Super Slim liner LED with standard output
- Quick connection system between fixtures
- Many lengths available
- Various mounting methods including magnetic
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr/70%
- Available color : 2400K, 2700K, 3000K, 3500K, 4000K, 6000K
- Color rendering : Ra > 80
- Energy efficiency : 75lm/W
- Degree of protection IP20

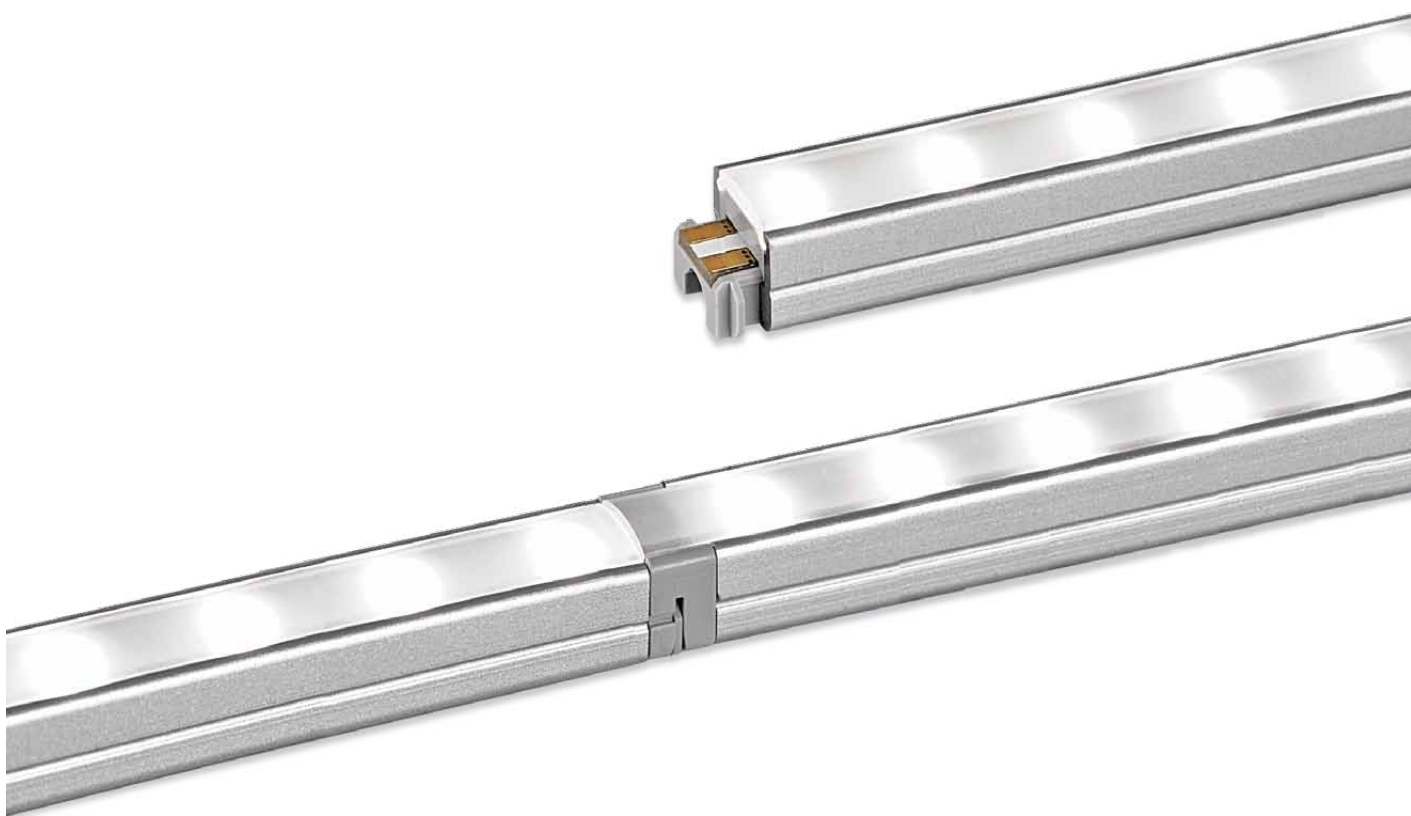


Magnet

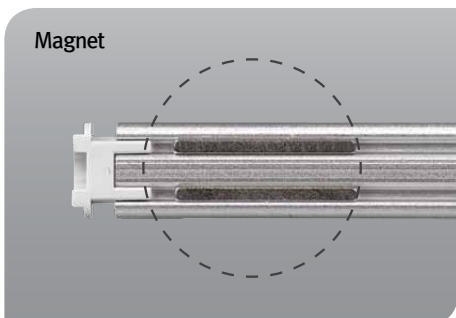

Round diffuser
Spot free LED



Square diffuser
Spot free LED

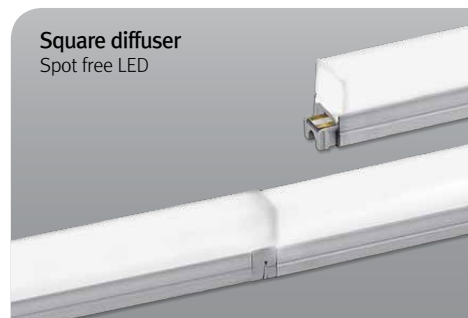



DIVA 2

Standard Output



DIVA 2 1W length (100 mm)



DIVA 2 3W length (192 mm)



DIVA 2 4W length (285 mm)



DIVA 2 7W length (565 mm)




DIVA 2 11W length (845 mm)




DIVA 2 15W length (1123mm)

Various options




Dimension

* Fixture

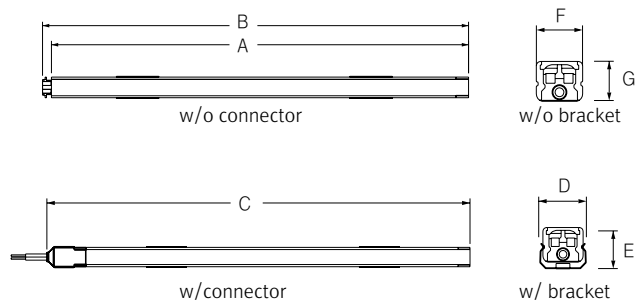


Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
NDV1A4B24M	DC 24	1.2	95	100	117	12	11	10.6	9
NDV3A4B24M	DC 24	2.4	188	192	210	12	11	10.6	9
NDV4A4B24M	DC 24	3.5	280	285	302	12	11	10.6	9
NDV7A4B24M	DC 24	7	560	565	582	12	11	10.6	9
NDV11A4B24M	DC 24	10.5	840	845	862	12	11	10.6	9
NDV15A4B24M	DC 24	14	1118	1123	1140	12	11	10.6	9


* Fixture with round diffuser

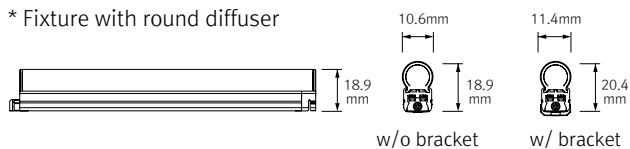


* Inline dimmer

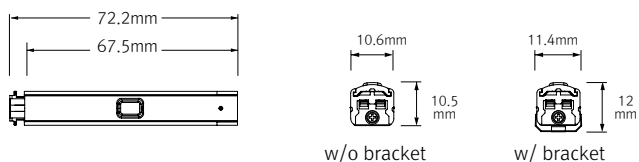

* Fixture with square diffuser

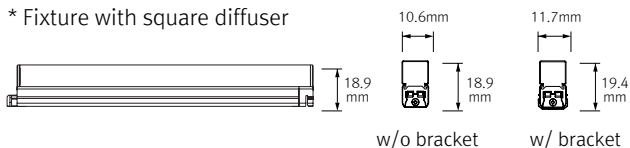


* LED Converter

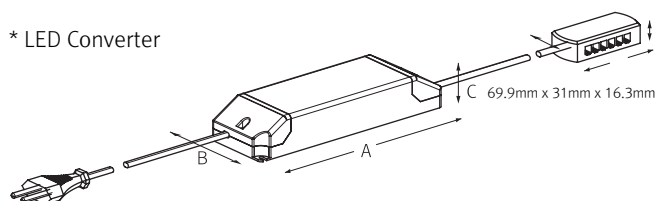


Model name	A (mm)	B (mm)	C (mm)
FLC15-24V/T	121	45	16
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32

Easy connection

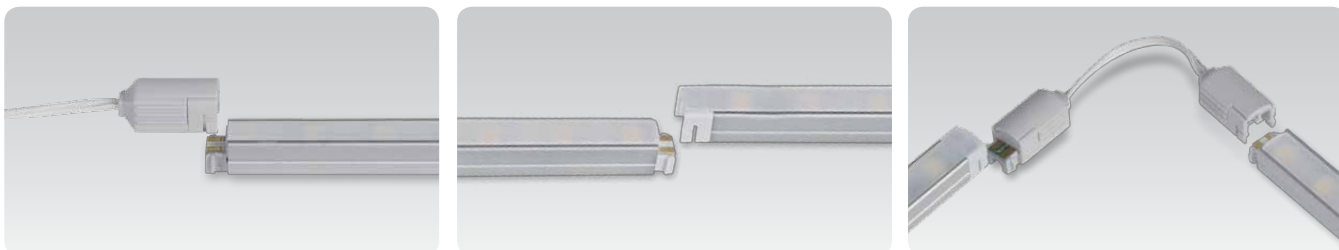

Installation

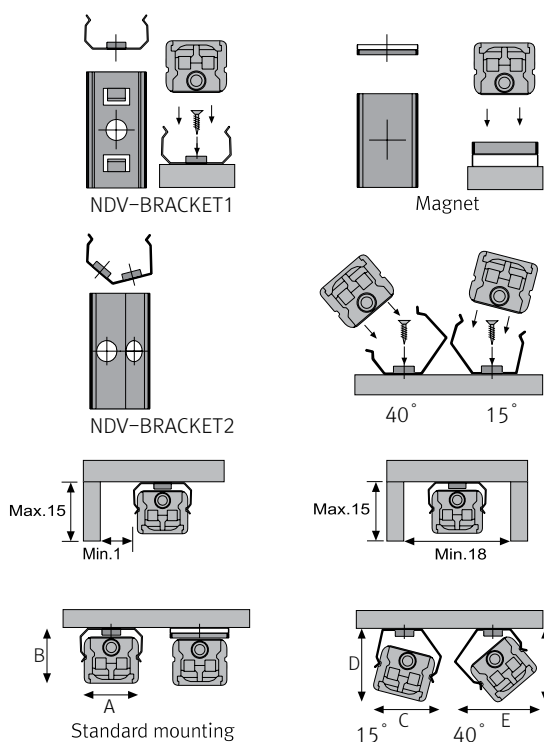

Max. connection

- DIVA2 : 55Watt in one row (single power feed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver		
	24V/15W	24V/30W	24V/75W
NDV1A4B24M	12	25	62
NDV3A4B24M	5	10	25
NDV4A4B24M	4	7	18
NDV7A4B24M	2	4	10
NDV11A4B24M	1	2	6
NDV15A4B24M	1	2	5

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	11.9	11.2	13.5	13.5	14.5	13
Round type	11.9	19.8	15.7	15.7	18.8	20.3
Square type	11.9	19.6	15.5	15.8	18.8	20.3

Accessories

Ⓐ Connecting cables (Between DIVA2 & DIVA2)

NDVPTC	NDVPTC1	NDVPTC2	NDVPTC4	NDVPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

Ⓑ Power feed : NDVPC

Power feed (Between DIVA2 & 6-way distributor)

Ⓒ Mounting bracket : NDV-BRACKET 1

Included in fixture

Ⓓ Angle bracket (15° & 40°) : NDV-BRACKET 2

Ⓔ Sidefeed for seamless extension (3W) : NDV3A4B24M/S

The dimension is the same as NDV3A4B24M

⓫ End cap : NDV-CAP

Included in fixture

Ⓖ LED Driver with 6way distributor, with power cord (1800mm)

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/T
Capacity	15W 24V	30W 24V	75W 24V

Ⓗ Dimming Interface (1-10V) : FLD-V10 (Max.48W)

: FDC-L10 (Max.100W)

⓫ Inline dimmer : NDVDIM (Max 55W in a row)

⓫ Round diffuser

NDV1CVRM	NDV3CVRM	NDV4CVRM	NDV7CVRM	NDV11CVRM	NDV15CVRM
1W	3W	4W	7W	11W	15W

⓫ Square diffuser

NDV1CVSM	NDV3CVSM	NDV4CVSM	NDV7CVSM	NDV11CVSM	NDV15CVSM
1W	3W	4W	7W	11W	15W


⓫ Y connector (2 way distributor)

⓫ Connecting bracket : NDV-BRACKET3

Included in fixture

⓫ Power bracket : NDV-BRACKET4

Provided with power feed (NDVPC)

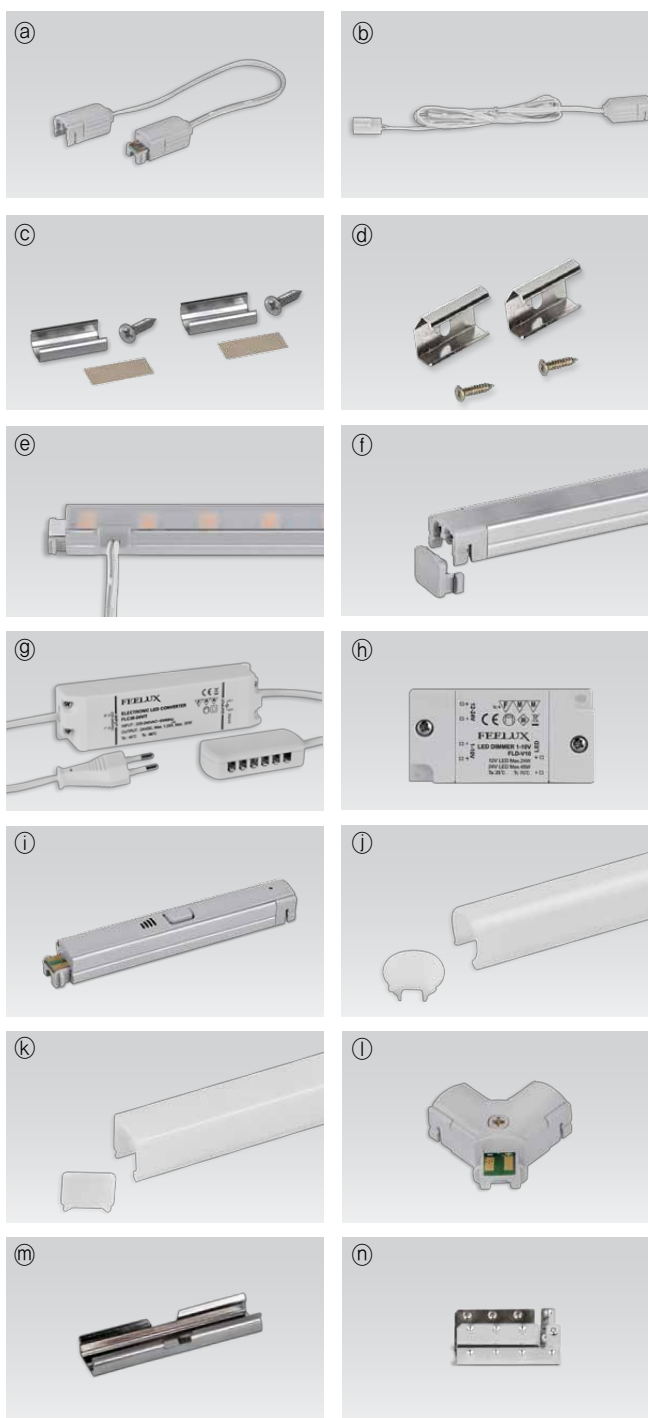

FEELUX

DIVA 2 HO

LED for Display, Cabinet, Furniture & Cove

Little light, Bigger punch!






Product Features


- Super Slim liner LED with high output
- Quick connection system between fixtures
- Many lengths available
- Various mounting methods including magnetic
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr/70%
- Available color : 2400K, 2700K, 3000K, 3500K, 4000K, 6000K
- Color rendering : Ra > 80
- Energy efficiency : 75 lm/W
- Degree of protection IP20

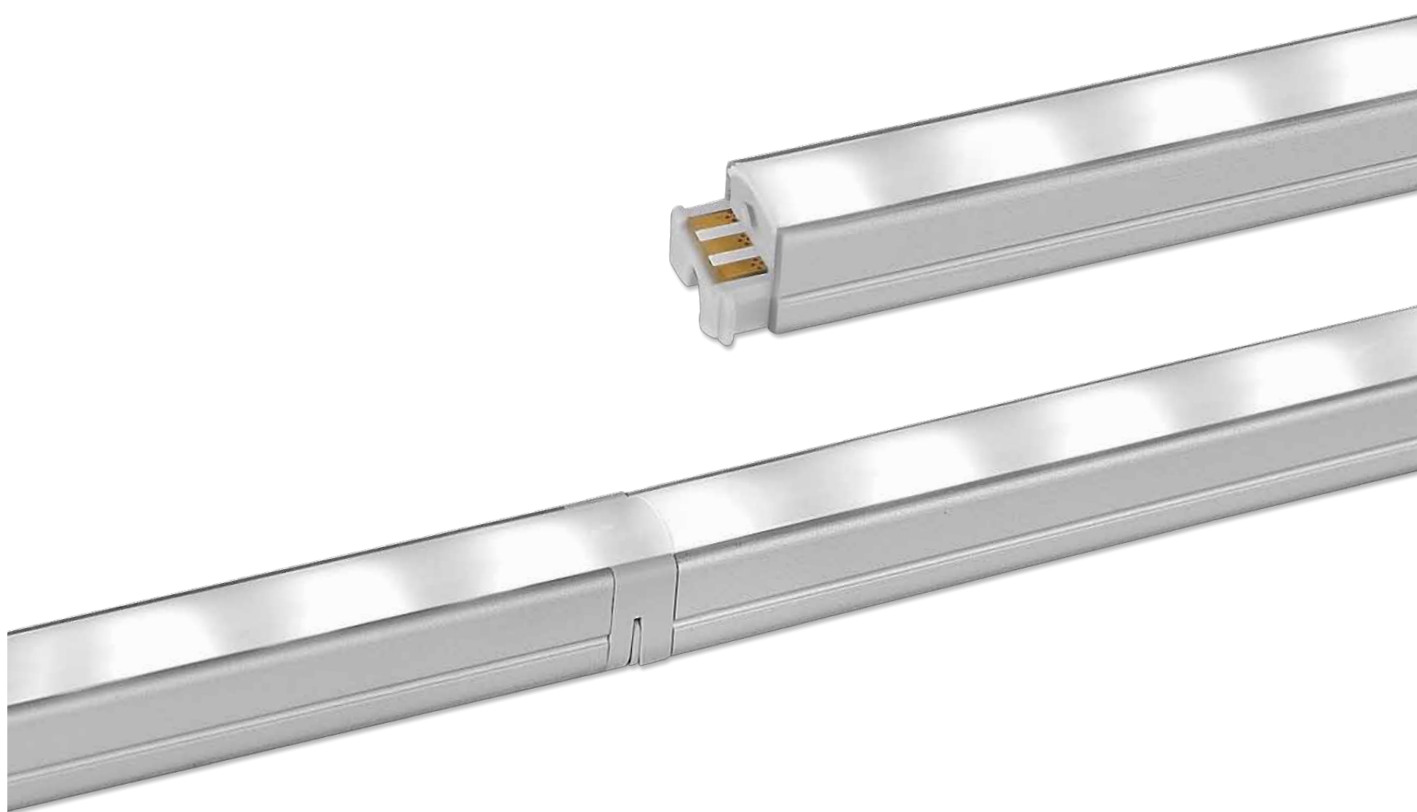


Magnet

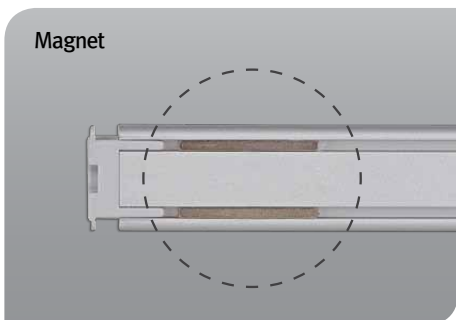

Round diffuser
Spot free LED



Square diffuser
Spot free LED

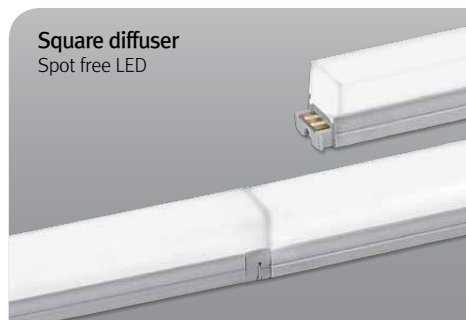



DIVA 2 HO

High Output



Diva2 HO 3W Length (145 mm)



Diva2 HO 6W Length (285 mm)



Diva2 HO 12W Length (565 mm)



Diva2 HO 18W Length (845 mm)




Diva2 HO 24W Length (1123mm)

Various options




Dimension

* Fixture

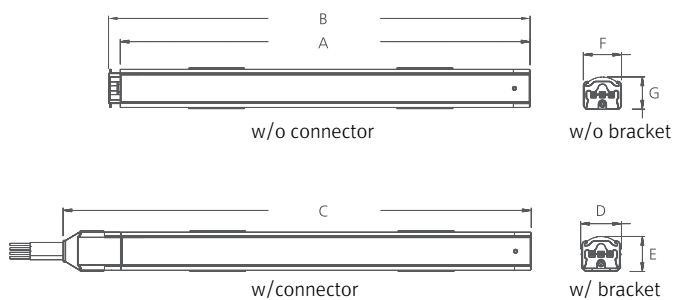


Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
HDV3A4B24M	DC 24	2.9	140	145	162	16	14	15	12.5
HDV6A4B24M	DC 24	5.8	280	285	302	16	14	15	12.5
HDV12A4B24M	DC 24	11.6	560	565	582	16	14	15	12.5
HDV18A4B24M	DC 24	17.4	840	845	862	16	14	15	12.5
HDV24A4B24M	DC 24	23.2	1118	1123	1140	16	14	15	12.5


* Fixture with round diffuser

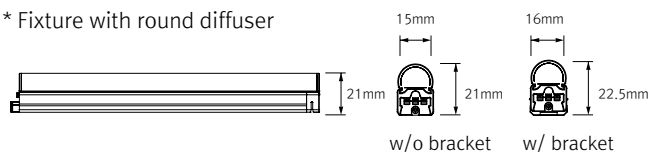


* Fixture with square diffuser

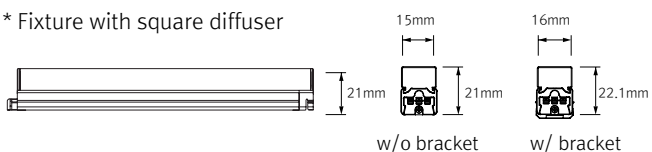

* Inline dimmer

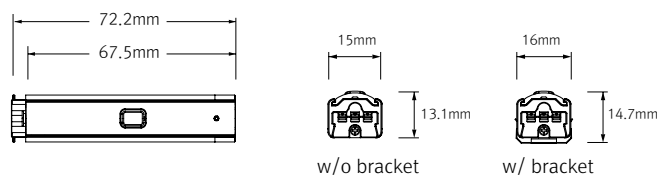


* LED Converter

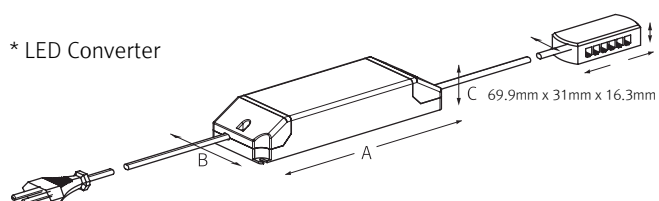


Model name	A (mm)	B (mm)	C (mm)
FLC15-24V/T	121	45	16
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32

Easy connection

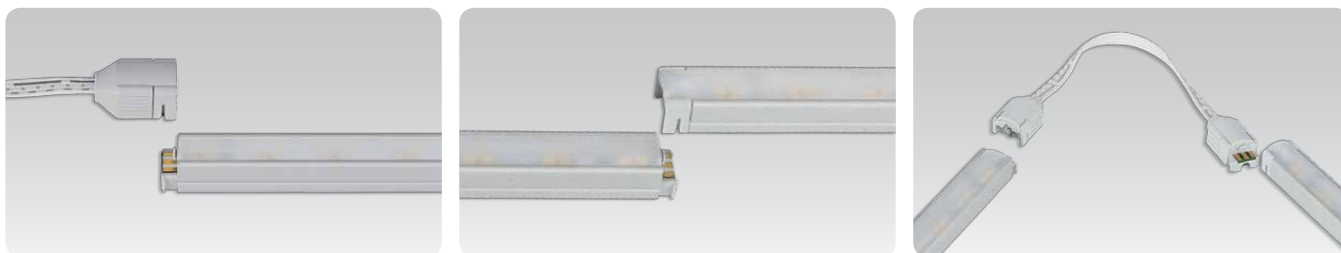

Installation

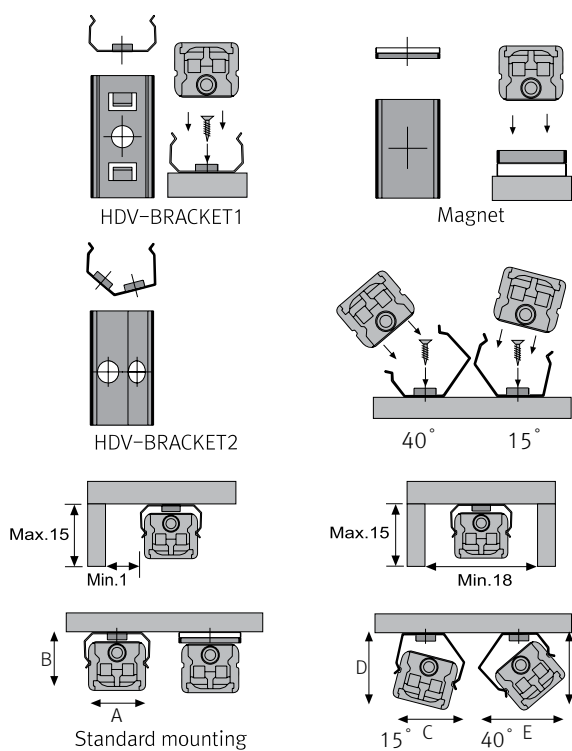

Max. connection

- DIVA2 HO : 75Watt in one row (single power feed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver		
	24V/15W	24V/30W	24V/75W
HDV3A4B24M	5	10	25
HDV6A4B24M	2	5	12
HDV12A4B24M	1	2	6
HDV18A4B24M	-	1	4
HDV24A4B24M	-	1	3

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	16.8	14.2	17.5	16.5	19.1	17.5
Round type	16.8	22.1	18.8	24.4	23.4	22.9
Square type	16.8	22.6	21.3	26.2	25.7	25.7

Accessories

a Connecting cables (Between DIVA2 HO & DIVA2 HO)

HDVPTC	HDVPTC1	HDVPTC2	HDVPTC4	HDVPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

b Power feed : HDVPC

Power feed 2500mm (Between DIVA2 HO & 6-way distributor)

c Mounting bracket : HDV-BRACKET1

Included in fixture

d Angle bracket (15° & 40°) : HDV-BRACKET2

e Sidefeed for seamless extension (3W) : HDV3A4B24M/S

The dimension is the same as HDV3A4B24M

f End cap : HDV - CAP

Included in fixture

g LED Driver with 6way distributor, with power feed(1800mm)

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/ T
Capacity	15W 24V	30W 24V	75W 24V

h Dimming Interface (1-10V) : FLD-V10 (Max.48W)

: FDC-L10 (Max.100W)

i Inline dimmer : HDVDIM (Max 75W in a row)

j Round diffuser

HDV3CVRM	HDV6CVRM	HDV12CVRM	HDV18CVRM	HDV24CVRM
3W	6W	12W	18W	24W

k Square diffuser

HDV3CVSM	HDV6CVSM	HDV12CVSM	HDV18CVSM	HDV24CVSM
3W	6W	12W	18W	24W

l Connecting bracket : HDV-BRACKET3

Included in fixture



DIVA 2 DUAL

LED for Display, Cabinet, Furniture & Cove

Dynamic white LED






Product Features


- Super Slim liner LED with white color changing output
- Quick connection system between fixtures
- Many lengths available
- Various mounting methods including magnetic
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr/70%
- Available color : 2700K ~ 6000K
- Color rendering : Ra > 80
- Energy efficiency : 75 lm/W
- Degree of protection IP20

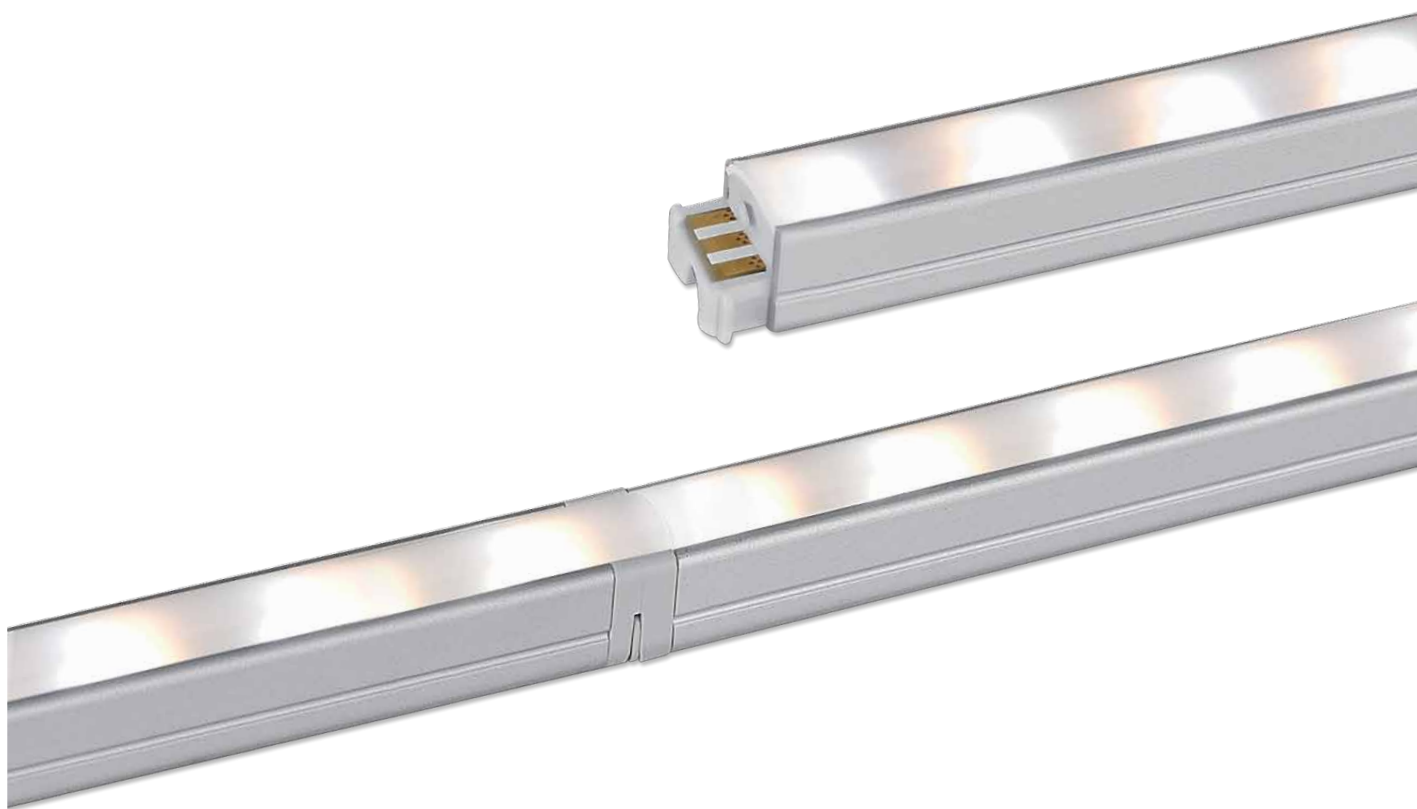


Magnet

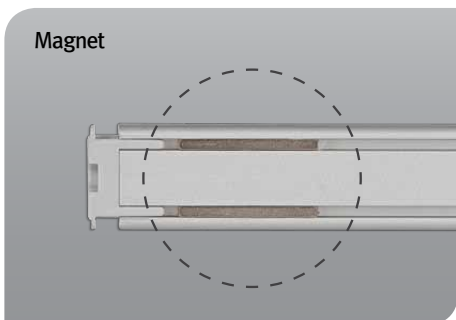

Round diffuser
Spot free LED



Square diffuser
Spot free LED

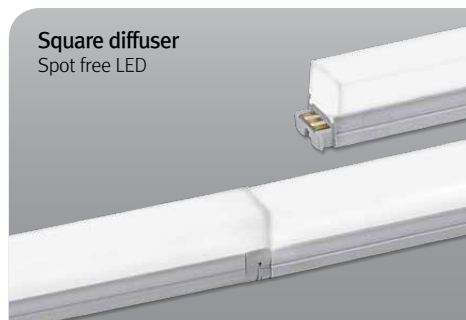



DIVA 2 HO

Dynamic White



Diva2 DUAL 3W Length (145 mm)



Diva2 DUAL 6W Length (285 mm)



Diva2 DUAL 12W Length (565 mm)




Diva2 DUAL 18W Length (845 mm)




Diva2 DUAL 24W Length (1123mm)

Various options

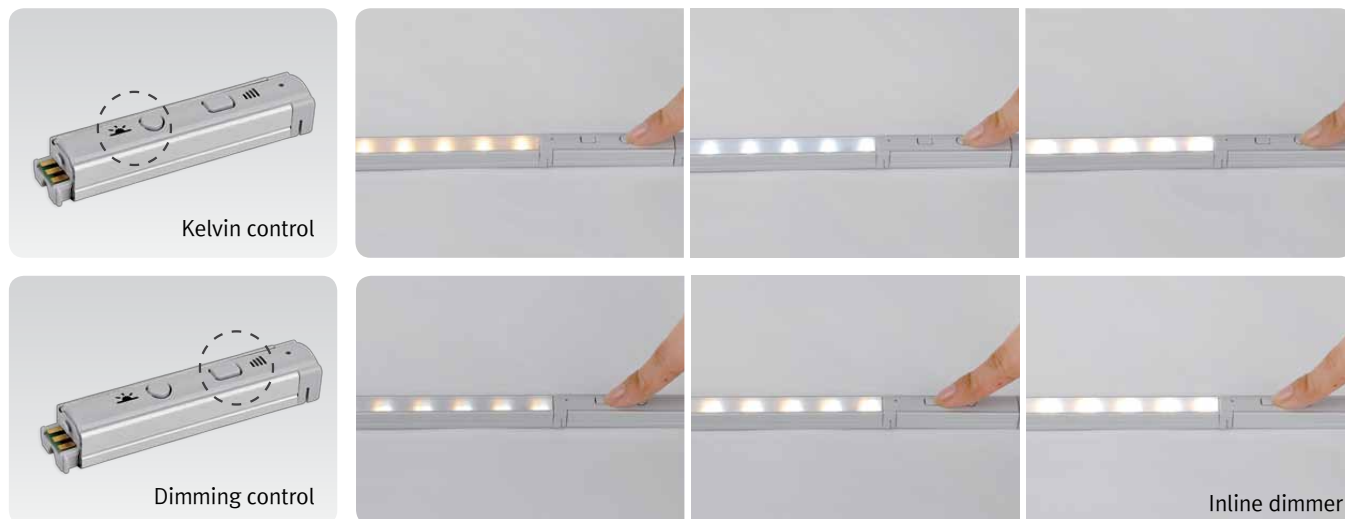


Dimension

* Fixture

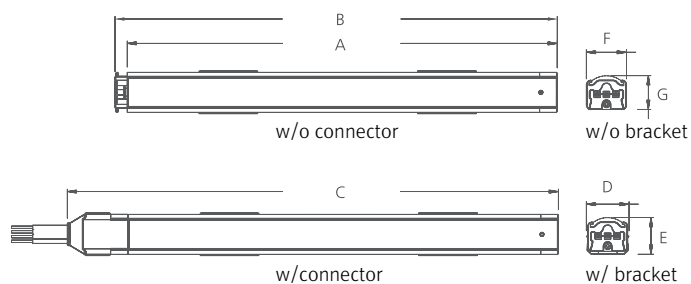


Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
DDV3AWCB24M	DC 24	2.9	140	145	162	16	14	15	12.5
DDV6AWCB24M	DC 24	5.8	280	285	302	16	14	15	12.5
DDV12AWCB24M	DC 24	11.6	560	565	582	16	14	15	12.5
DDV18AWCB24M	DC 24	17.4	840	845	862	16	14	15	12.5
DDV24ABWCB24M	DC 24	23.2	1118	1123	1140	16	14	15	12.5


* Fixture with round diffuser

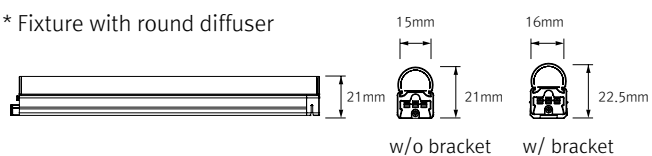


* Fixture with square diffuser

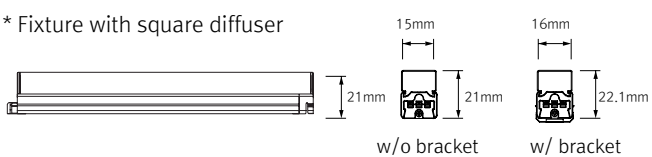

* Inline dimmer

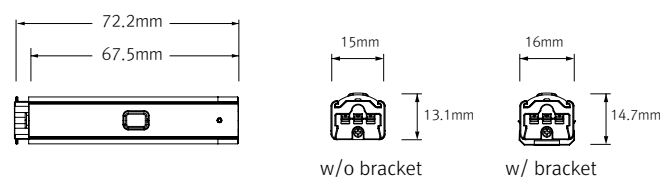


* LED Converter

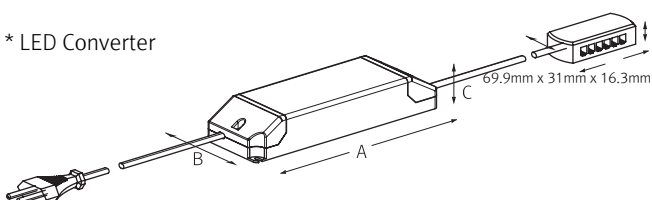


Model name	A (mm)	B (mm)	C (mm)
FLC15-24V/T	121	45	16
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32

Easy connection

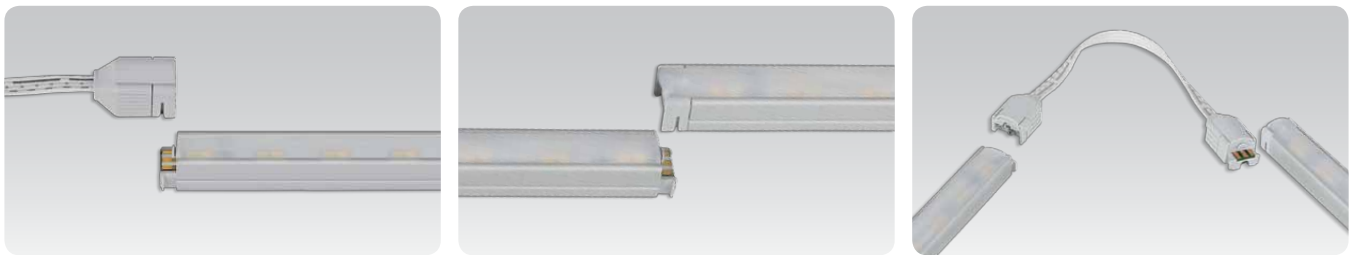

Installation

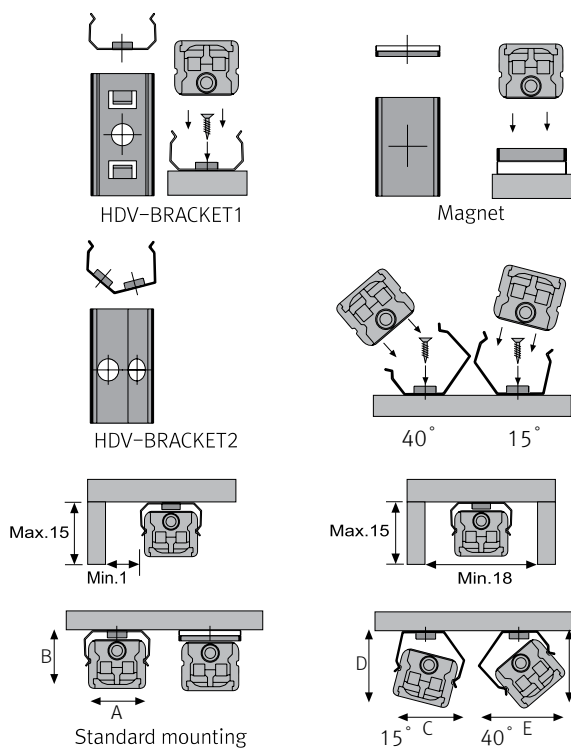

Max. connection

- DIVA2 DUAL : 75Watt in one row (single power feed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver		
	24V/15W	24V/30W	24V/75W
DDV3AWCB24M	5	10	25
DDV6AWCB24M	2	5	12
DDV12AWCB24M	1	2	6
DDV18AWCB24M	-	1	4
DDV24AWCB24M	-	1	3

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	16.8	14.2	17.5	16.5	19.1	17.5
Round type	16.8	22.1	18.8	24.4	23.4	22.9
Square type	16.8	22.6	21.3	26.2	25.7	25.7

Accessories

a Connecting cables (Between DIVA2 DUAL & DIVA2 DUAL)

HDVPTC	HDVPTC1	HDVPTC2	HDVPTC4	HDVPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

b Power feed : HDVPC

Power feed 2500mm (Between DIVA2 DUAL & 6-way distributor)

c Mounting bracket : HDV-BRACKET1

Included in fixture

d Angle bracket (15° & 40°) : HDV-BRACKET2

e Sidefeed for seamless extension (3W) : DDV3AWCB24M/S

The dimension is the same as DDV3AWCB24M

f End cap : HDV - CAP

Included in fixture

g LED Driver with 6way distributor, with power cord(1800mm)

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/T
Capacity	15W 24V	30W 24V	75W 24V

h Inline Dimmer : DDVDIM (Max 75W in a row)

i Round diffuser

HDV3CVRM	HDV6CVRM	HDV12CVRM	HDV18CVRM	HDV24CVRM
3W	6W	12W	18W	24W

j Square diffuser

HDV3CVSM	HDV6CVSM	HDV12CVSM	HDV18CVSM	HDV24CVSM
3W	6W	12W	18W	24W

k Connecting bracket : HDV-BRACKET3

Included in fixture






Make your own rainbow!

Color changing LED

DIVA 2 RGB

FEELUX

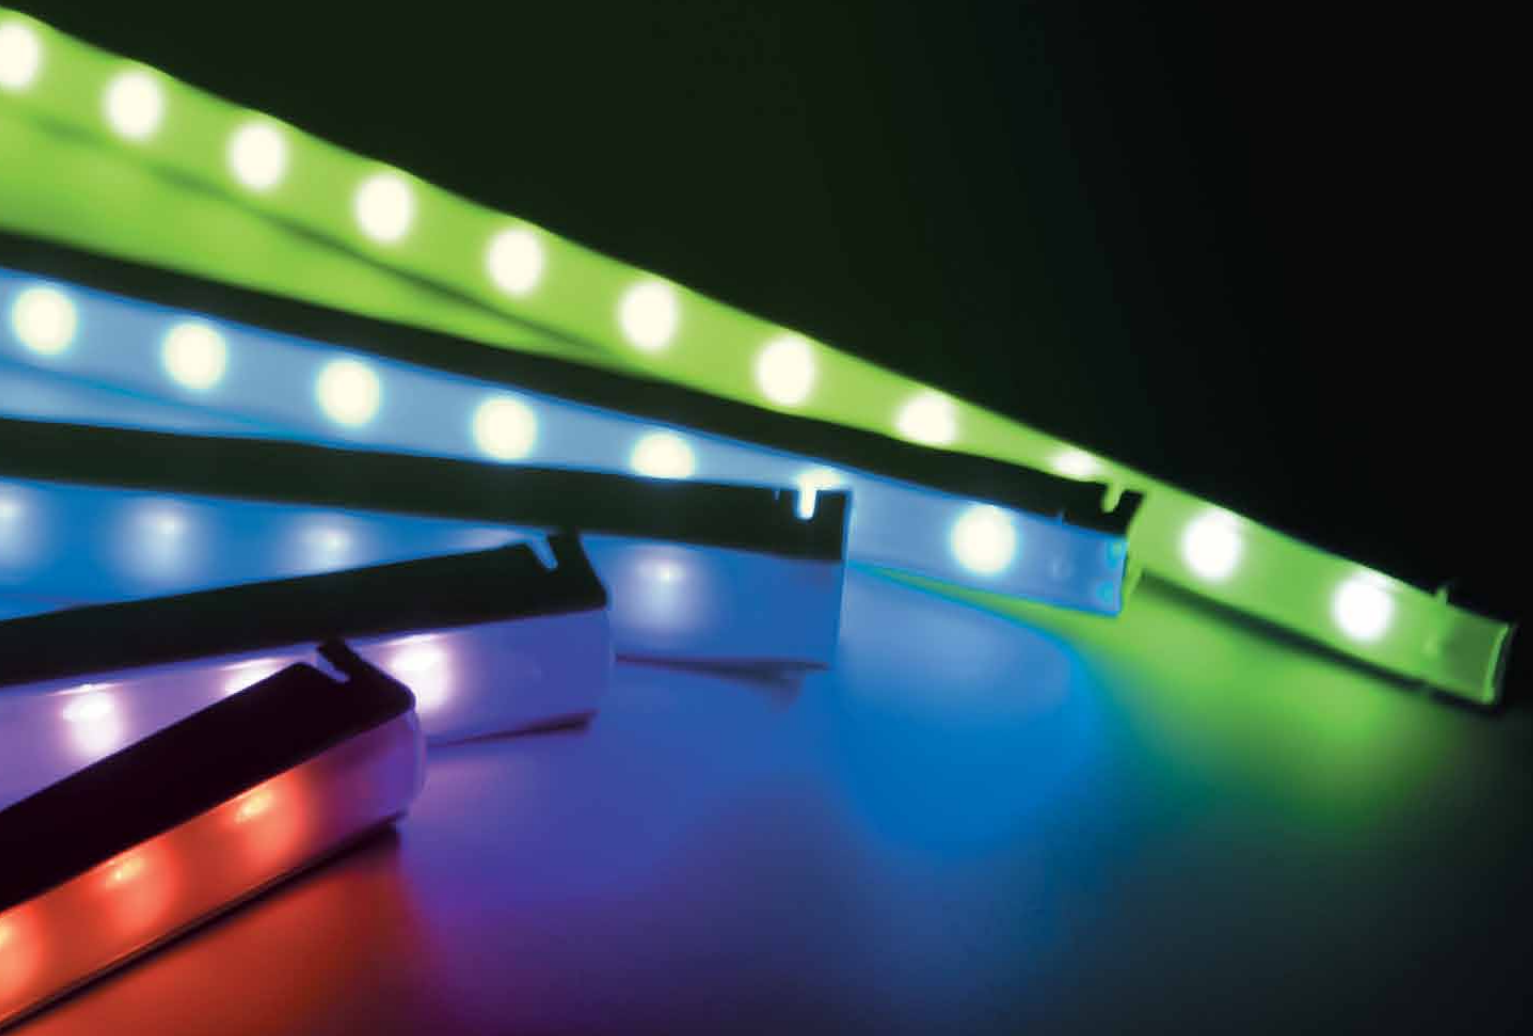

FEELUX

DIVA 2 RGB

LED for Display, Cabinet, Furniture & Cove

Color changing LED!






Product Features


- Super Slim liner LED with RGB color changing output
- Quick connection system between fixtures
- Many lengths available
- Various mounting methods including magnetic
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr
- RGB color changing
- Degree of protection IP20

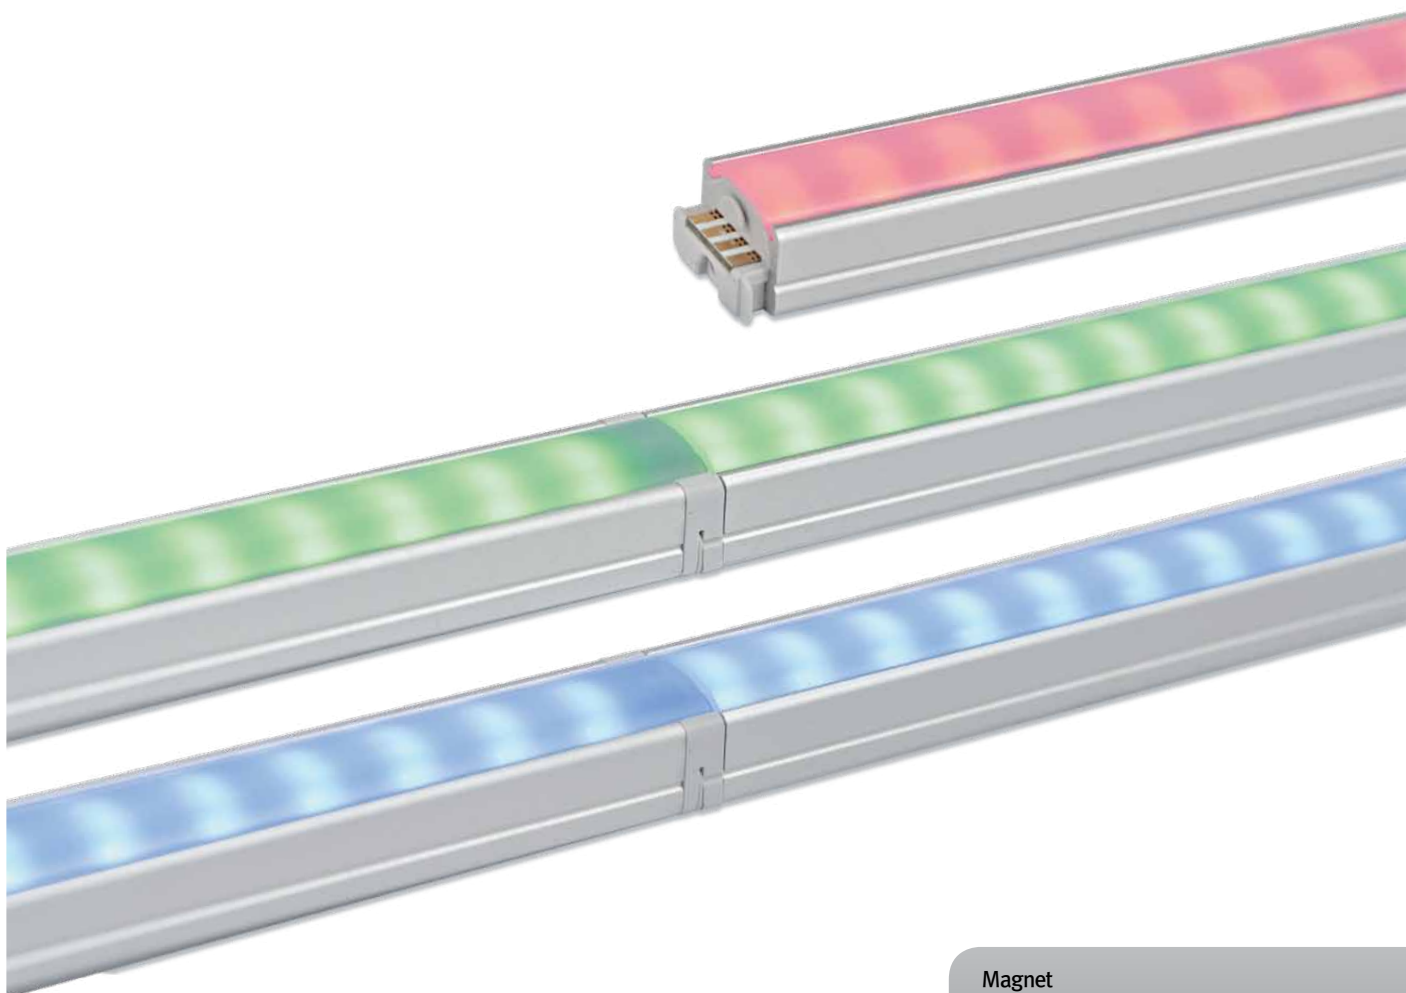

Magnet

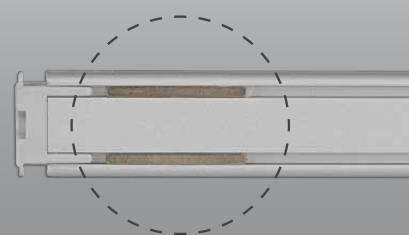



DIVA 2 RGB

Color changing



DIVA2 RGB 6W Length (285 mm)




DIVA2 RGB 12W Length (565 mm)




DIVA2 RGB 18W Length (845 mm)

Color changing

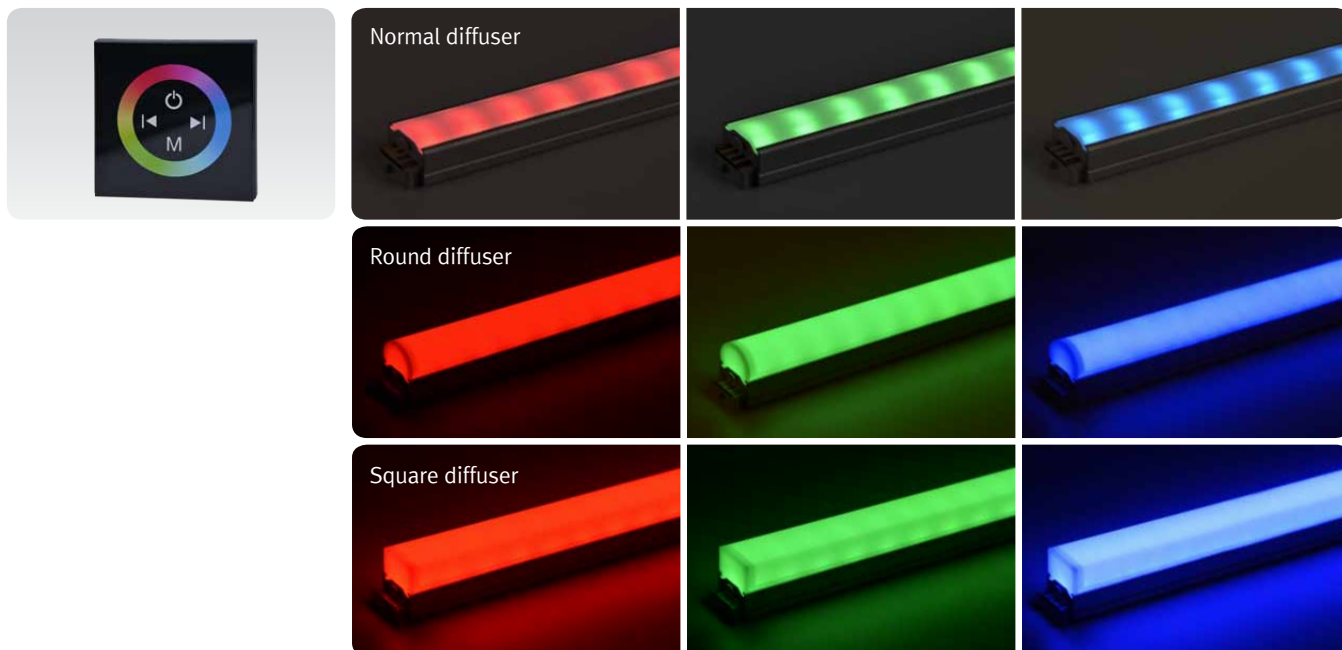


Dimension

* Fixture

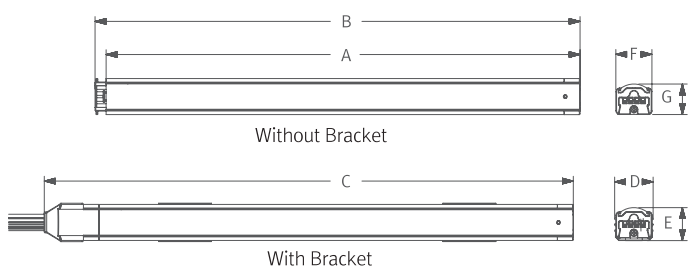


Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
RDV6RGB24M	DC 24	6.2	280	285	302	16	14	15	12.5
RDV12RGB24M	DC 24	12.4	560	565	582	16	14	15	12.5
RDV18RGB24M	DC 24	18.6	840	845	862	16	14	15	12.5


* Fixture with round diffuser

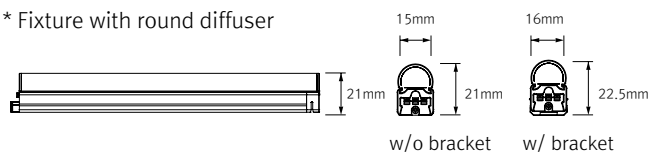


* Fixture with square diffuser

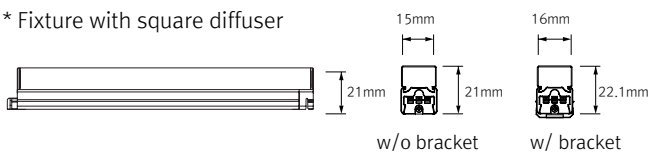

* RGB controller

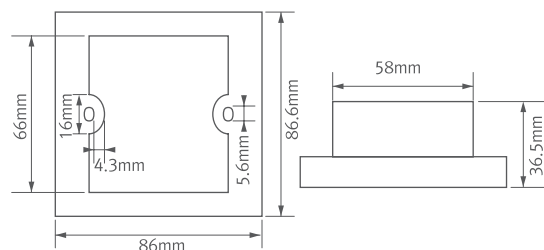


* LED Converter

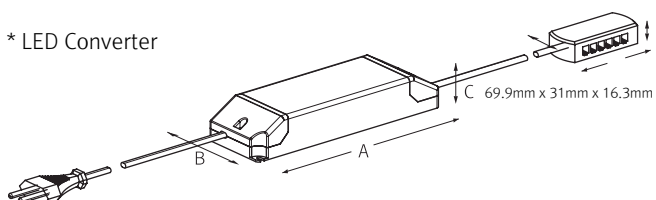


Model name	A (mm)	B (mm)	C (mm)
FLC15-24V/T	121	45	16
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32

Easy connection

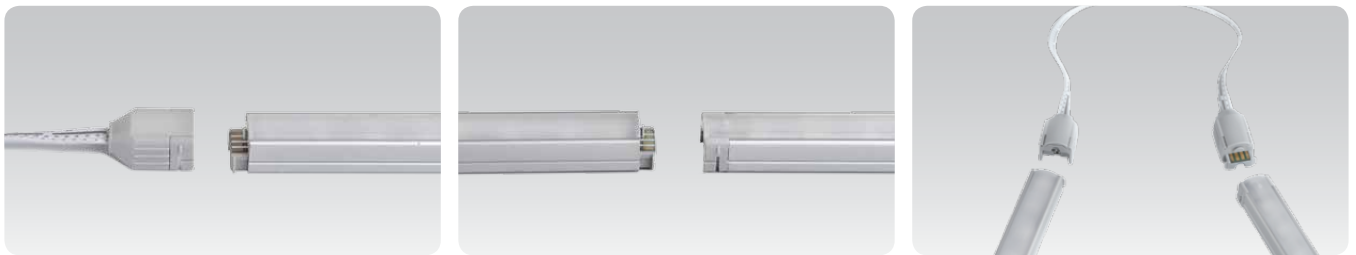

Installation

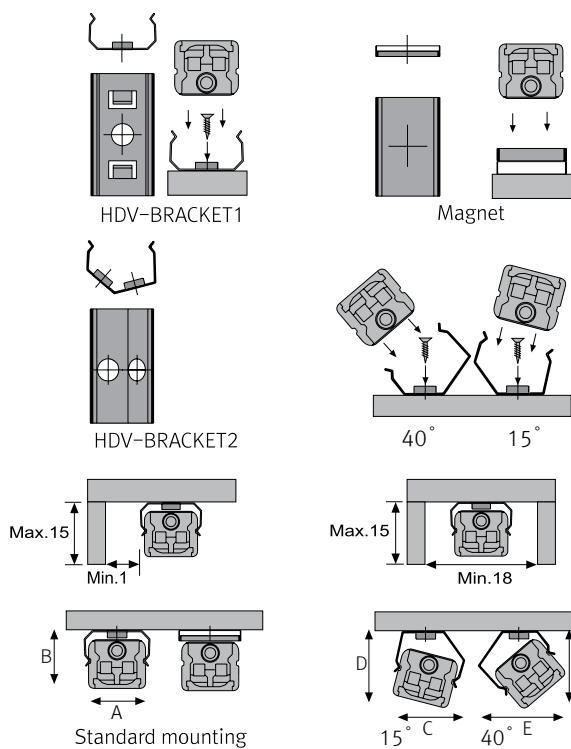

Max. connection

- DIVA2 RGB : 75Watt in one row (single power feed)
- LED Driver

LED Driver Model Name	Max. units for LED Driver		
	24V/15W	24V/30W	24V/75W
RDV6RGB24M	2	5	12
RDV12RGB24M	1	2	6
RDV18RGB24M	-	1	4

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	16.8	14.2	17.5	16.5	19.1	17.5
Round type	16.8	22.1	18.8	24.4	23.4	22.9
Square type	16.8	22.6	21.3	26.2	25.7	25.7

Accessories

a Connecting cables (Between DIVA2 DUAL & DIVA2 DUAL)

RDVPTC	RDVPTC1	RDVPTC2	RDVPTC4	RDVPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

b Power feed : RDVPC

Power feed 2500mm (Between DIVA2 RGB & 6-way distributor)

c Mounting bracket : HDV-BRACKET1

Included in fixture

d Angle bracket (15° & 40°) : HDV-BRACKET2

e Sidefeed for seamless extension (6W) : RDV6RGB24M/S

The dimension is the same as RDV6RGB24M

f End cap : HDV - CAP

Included in fixture

g LED Driver with 6way distributor, with power cord(1800mm)

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/T
Capacity	15W 24V	30W 24V	75W 24V

h RGB controller

i Round diffuser

HDV6CVRM	HDV12CVRM	HDV18CVRM
6W	12W	18W

j Square diffuser

HDV6CVSM	HDV12CVSM	HDV18CVSM
6W	12W	18W

k Connecting bracket : HDV-BRACKET3

Included in fixture





Super slim! Super light!

Recessed & Surface mount LED puck

DIVA 2 Spot

FEELUX



DIVA 2 Spot

LED for Kitchen cabinet, Displays & Furniture

Recessed & surface mount LED puck.





Product Features

- Linkable together and with Feelux Diva 2 linear LED
- Single 4W diode eliminates multiple shadows
- Virtually no heat emission and no UV radiation
- Available in silver, gold, white, black
- Friction fit in slim pocket with mounting spring option
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr/70%
- Available color : 3000K, 4000K, 6000K
- Color rendering : Ra>80
- Energy efficiency : 80 lm/W
- Degree of protection IP20
- Total energy consumption of 4.3W



black



silver




gold




white

Various color

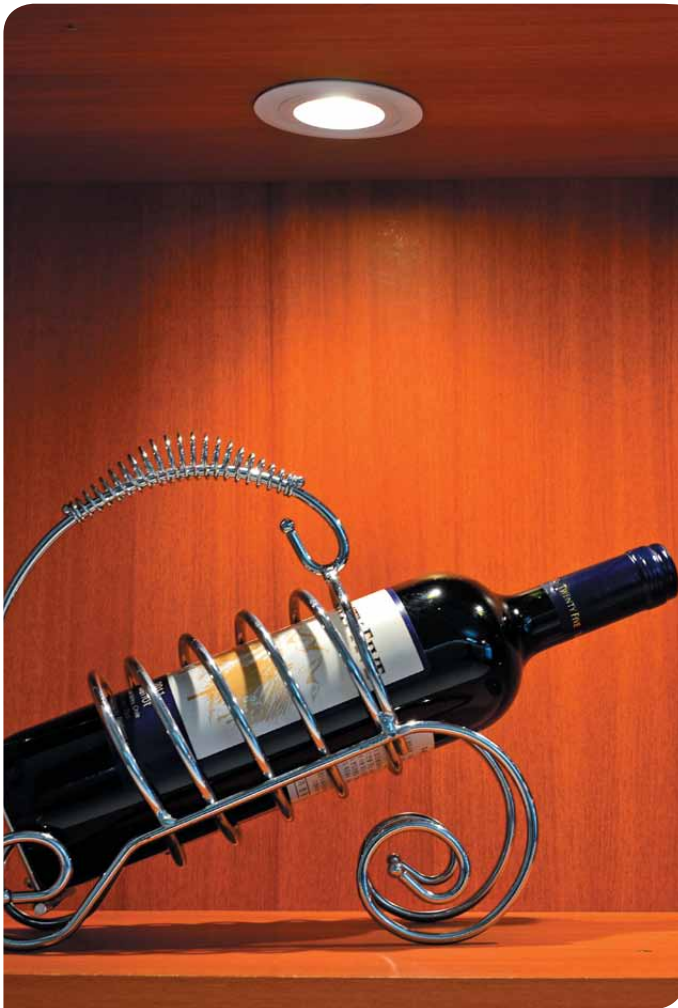


Dimension

Type A (Linkable)

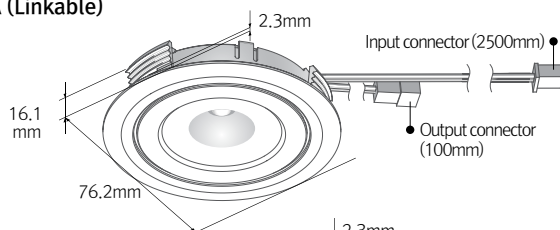

Type B (End unit)

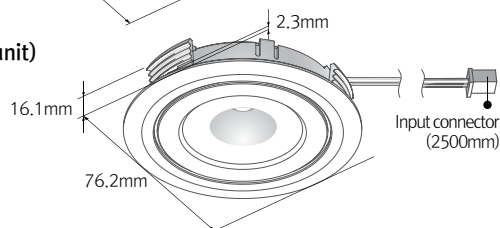


Max. connection of linked fixtures

- DIVA2 SPOT : Max 7pcs in a row
- LED Driver


Model Name	Max. units for Led driver		
	24V / 15W	24V / 30W	24V / 75W
DVS4A4B24W	4	7	18
DVS4B4B24W	4	7	18

Installation


Linkable between Diva2 Spot & Diva2 Spot (Type A)



Linkable between Diva2 Spot & Diva2 (Type A)




Linkable between Diva2 & Diva2 Spot (Type A)




End Unit (Type B)



Hole Diameter



Mounting spring installation

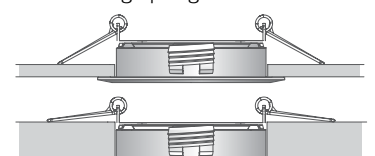

Single diode without multiple shadow



Accessories

a) Diva2 spot linkable type

White	Black	Gold	Silver
DVS4A4B24W	DVS4A4B24B	DVS4A4B24G	DVS4A4B24S

b) Diva2 spot end unit type

White	Black	Gold	Silver
DVS4B4B24W	DVS4B4B24B	DVS4B4B24G	DVS4B4B24S

c) Extension cable (Between Diva2 Spot & Diva2 Spot or 6 way distributor)

DVS cable(A) : 2,500mm

d) Connecting cable (Between Diva2 Spot & Diva2)

DVS cable(B) : 1,000mm

e) Connecting cable(Between Diva2 & Diva2 Spot)

NDVPC : 2500mm

f) Dimming Interface (1-10V) : FLD-V10 (Max.48W)

: FDC-L10 (Max.100W)

g) Mounting spring: DVS spring

h) LED Driver with 6way distributor


Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/ T
Capacity	15W 24V	30W 24V	75W 24V

i) Surface mount ring

White	Black	Gold	Silver
DVS MR-WT	DVS MR-BK	DVS MR-GD	DVS MR-SV

j) Deco Ring

White	Black	Gold	Silver
DVS DR-WT	DVS DR-BK	DVS DR-GD	DVS DR-SV

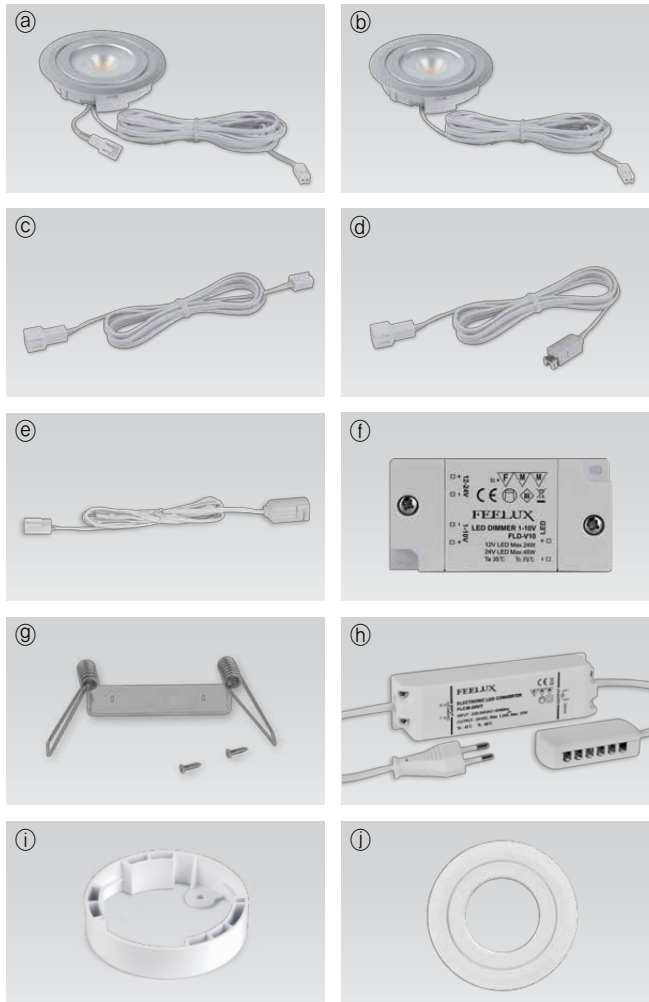





FEELED LED Lighting

FEELED MonoRail 06 ■

FEELED DIVA 2 14 ■

FEELED DIVA 2 HO 20 ■

FEELED DIVA 2 DUAL 26 ■

FEELED DIVA 2 RGB 34 ■

FEELED DIVA 2 Spot 42 ■

