


Dimensions

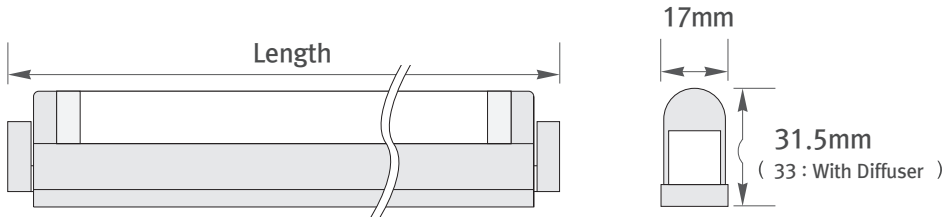


Model No.	Lamp power (Watt)	Length (mm)	lm	Input Current (mA)
DL7A4B23NC/T	7W	262	420	58
DL10A4B23NC/T	10W	339	700	83
DL18A4B23NC/T	18W	517	1305	150

Specification


Frequency range	50/60Hz
Voltage	220-240V
Power factor	>97%
Color rendering	>82
Degree of protection	IP20
Lamp life	10,000 hr
Diameter	13mm (T4)
Class of protection	II



Mounting

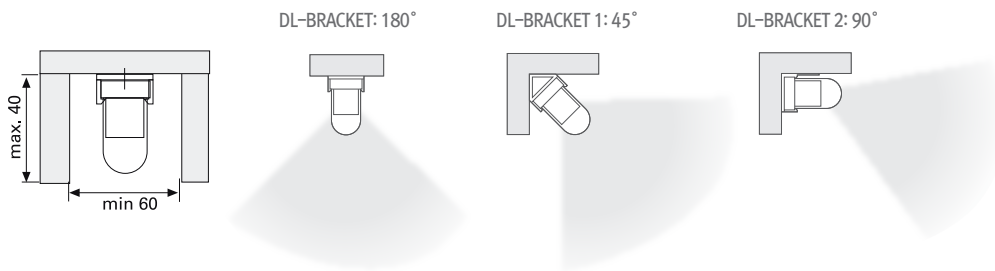

Connection (Total lamp output in one strip light maximum 270W)

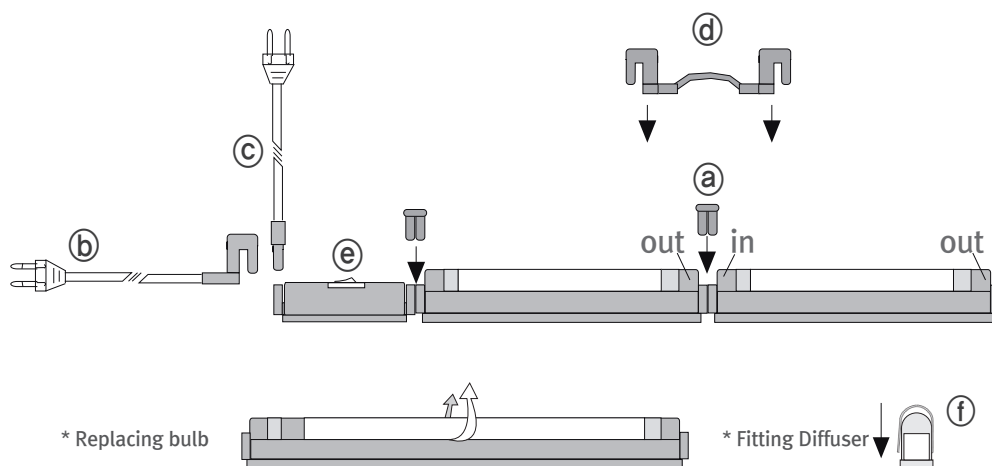

Accessories



- a** DLCP/T
direct connecting cap



- b** DLPC230/T
powercord 1800mm (6 feet) with plug



- c** DLPC230/SM2/T
powercord 1800mm (6 feet) with plug & straight connector



- d** DLPTC/T
connecting cable 150mm (6 inch)
DLPTC1/T
connecting cable 300mm (1 feet)
DLPTC2/T
connecting cable 600mm (2 feet)
DLPTC4/T
connecting cable 1200mm (4 feet)
DLPTC6/T
connecting cable 1800mm (6 feet)



- e** DLSB/T
on-off switch



- f** DL7CV
polycarbonate diffuser for 7W Decolamp
DL10CV
polycarbonate diffuser for 10W Decolamp
DL18CV
polycarbonate diffuser for 18W Decolamp