



Dimensions

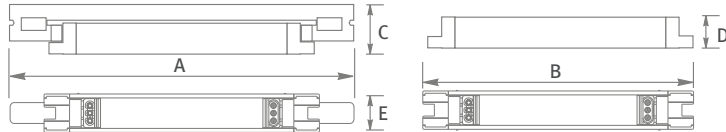

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
580	500	45	26.6	34
880	800	45	26.6	34
1180	1100	45	26.6	34

	Model No.	Lamp power (watt)	Voltage
High Efficiency	DSLL14AB23NN	14	220-240
	DSLL21AB23NN	21	220-240
	DSLL28AB23NN	28	220-240
High Output	DSLL24AB23NN	24	220-240
	DSLL39AB23NN	39	220-240
	DSLL54AB23NN	54	220-240

Mounting

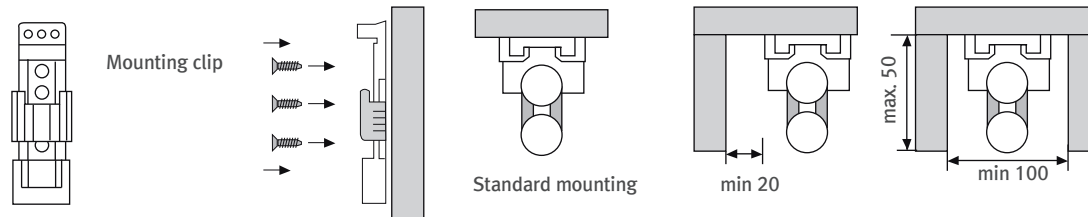

Specification

Frequency range	50/60Hz
Voltage	220-240V
Power factor	>97%
Color rendering	Ra>80
A-THD	<15%
EMI test	EN55015
Class of protection	II
Degree of protection	IP20
Output protocol	PWM
Dimming range	5~100%



Accessories

- (a)** DSLLOPC230
Between DimSlimLine(in) & Dimming Controller(out) w/o plug
- (b)** SLLCPL
direct connecting cap
- (c)** DSLLPTC connecting cable 150mm (6inch)
DSLLPTC1 connecting cable 300mm (1feet)
DSLLPTC2 connecting cable 600mm (2feet)
DSLLPTC4 connecting cable 1200mm (4feet)
DSLLPTC6 connecting cable 1800mm (6feet)
- (d)** SLL-CAP
protecting cap at the edge of fixture
- (e)** DSLLOPTC connecting cable 150mm (6inch)
DSLLOPTC1 connecting cable 300mm (1feet)
DSLLOPTC2 connecting cable 600mm (2feet)
DSLLOPTC4 connecting cable 1200mm (4feet)
DSLLOPTC6 connecting cable 1800mm (6feet)
Between DimSlimLine(in) & Dimming booster(out) w/o

Connection

