



Dimensions

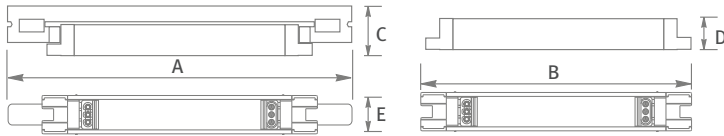


A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
580	500	45	26.6	34
880	800	45	26.6	34
1180	1100	45	26.6	34

	Model No.	Lamp power (watt)	Voltage
Non Dimmable (SlimLine)	SLL24AB23NN	24	220-240
	SLL39AB23NN	39	220-240
	SLL54AB23NN	54	220-240
	SLL14AB23NN	14	220-240
	SLL21AB23NN	21	220-240
	SLL28AB23NN	28	220-240
	SLL14AB12NN	14	110-130
	SLL21AB12NN	21	110-130
	SLL28AB12NN	28	110-130
Dimmable (DimSlimLine)	DSLL14AB23NN	14	220-240
	DSLL21AB23NN	21	220-240
	DSLL28AB23NN	28	220-240

Mounting

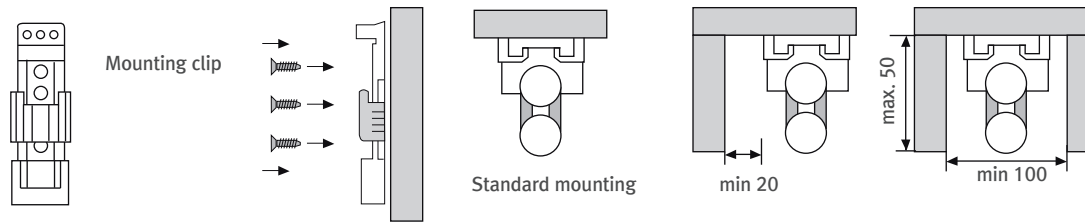

Connection

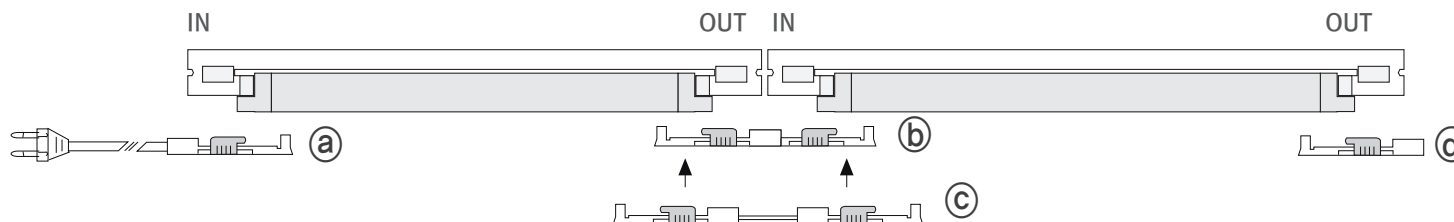

Specification

Frequency range	50/60Hz
Voltage	100-130V/220-240V
Power factor	>97%
Color rendering	>80%
Degree of protection	IP20
THD	<15%
EMI test	EN55015
Class of protection	II



Accessories

- (a) SLLPC230
powercord 1800mm with plug
- (b) SLLCPL
direct connecting cap
- (c) SLLPTC
connecting cable 150mm (6inch)
- (d) SLL-CAP
protecting cap at the edge of fixture