


Dimensions

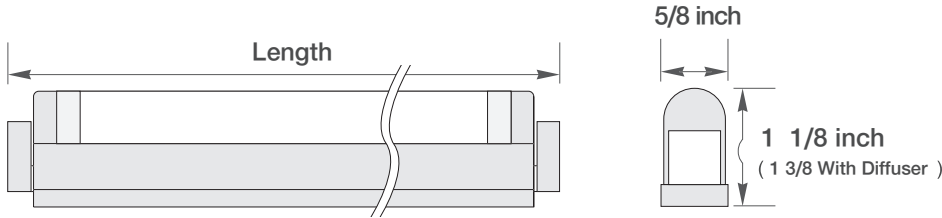


| Model No. | Lamp power (watt) | Length | lm | Input Current (mA) |
|-------------|-------------------|-----------------|------|--------------------|
| DL7A4B12NC | 7W | 10 5/16 (262mm) | 420 | 120 |
| DL10A4B12NC | 10W | 13 6/16 (339mm) | 700 | 160 |
| DL18A4B12NC | 18W | 20 6/16 (517mm) | 1305 | 250 |

Specification


| | |
|----------------------|-----------|
| Frequency range | 50/60Hz |
| Voltage | 100-130V |
| Power factor | >97% |
| Color rendering | >82 |
| Degree of protection | IP20 |
| Lamp life | 10,000 hr |
| Diameter | 13mm (T4) |
| Class of protection | II |



Mounting

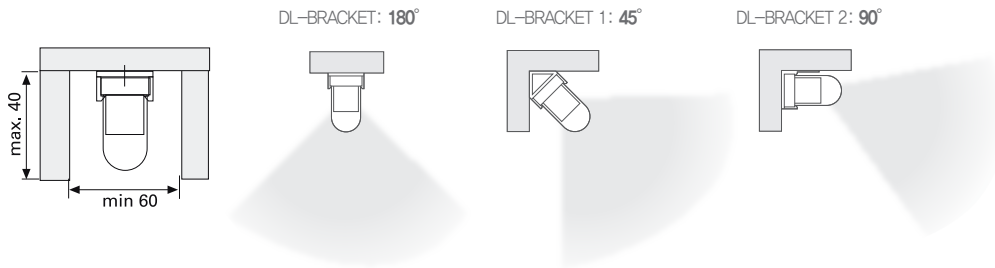

Connection (Total lamp output in one strip light maximum 270W)

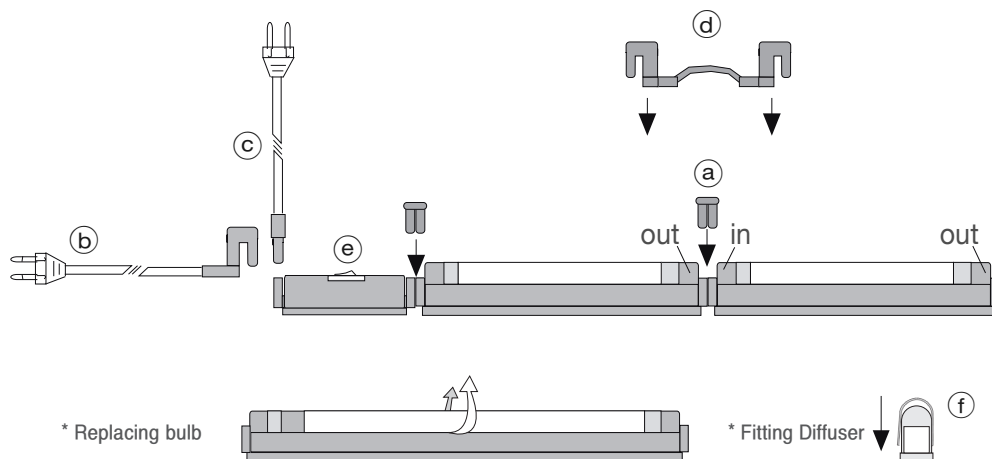

Accessories

- a** DLCP
direct connecting cap
- b** DLPC120/XL
powercord 1800mm (6 feet) with plug
- c** DLPC120/SM2
powercord 1800mm (6 feet) with plug & straight connector
- d** DLPTC/XL
connecting cable 150mm (6 inch)
DLPTC1/XL
connecting cable 300mm (1 feet)
DLPTC2/XL
connecting cable 600mm (2 feet)
DLPTC4/XL
connecting cable 1200mm (4 feet)
DLPTC6/XL
connecting cable 1800mm (6 feet)
- e** DLSB/XL
on-off switch
- f** DL7CV
polycarbonate diffuser for 7W Decolamp
DL10CV
polycarbonate diffuser for 10W Decolamp
DL18CV
polycarbonate diffuser for 18W Decolamp