



Dimensions

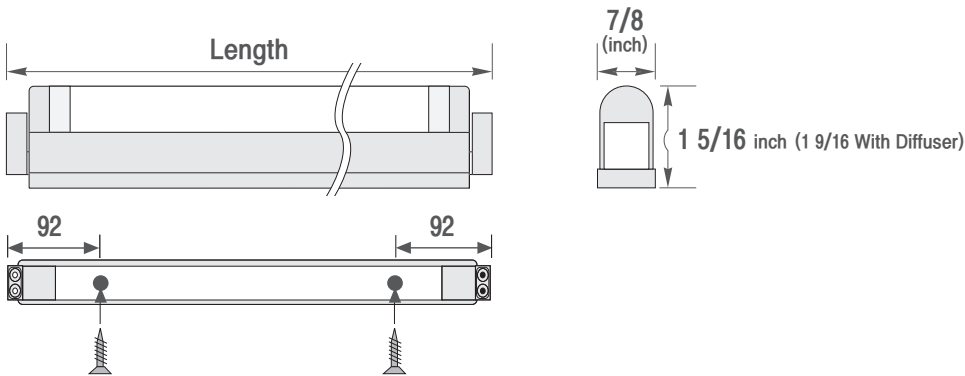


Model No.	Lamp power (Watt)	Length	lm	Input Current (mA)
SL8AB12NN	8W	13 9/16 (345mm)	740	165
SL14AB12NN	14W	23 7/16 (595mm)	1350	190
SL21AB12NN	21W	35 4/8 (895mm)	2100	240
SL28AB12NN	28W	47 1/16 (1195mm)	2900	290
SL35AB12NN	35W	58 7/8 (1495mm)	3650	360

Mounting

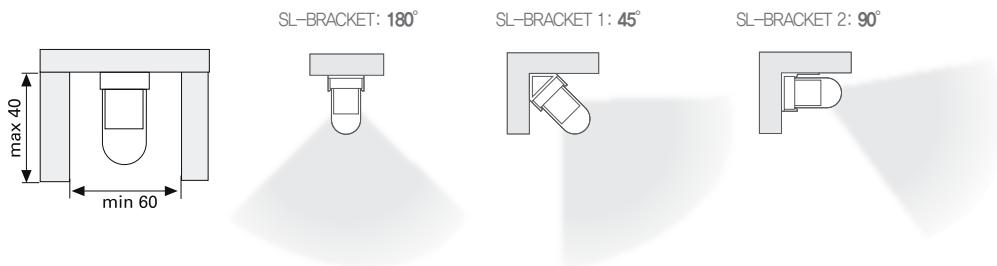

Connection (Total lamp output in one strip light maximum 270W)

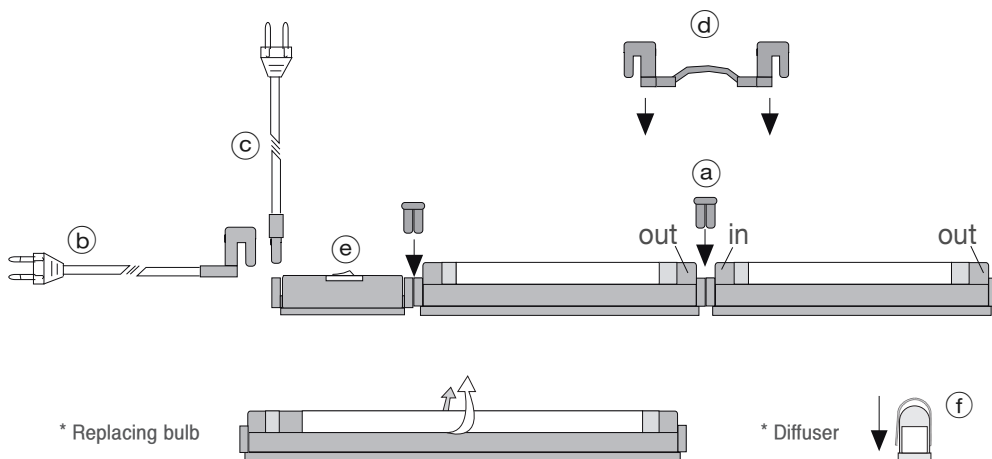







Specification

Frequency range	50/60Hz
Voltage	100-130V
Power factor	>97%
Color rendering	>82
Lamp life	16,000 hr
Diameter	16mm (T5)



Accessories

-  **a** DLCP
direct connecting cap
-  **b** DLPC120/XL
powercord 1800mm (6 feet) with plug
-  **c** DLPC120/SM2
powercord 1800mm (6 feet) with plug & straight connector
-  **d** DLPTC/XL
connecting cable 150mm (6 inch)
DLPTC1/XL
connecting cable 300mm (1 feet)
DLPTC2/XL
connecting cable 600mm (2 feet)
DLPTC4/XL
connecting cable 1200mm (4 feet)
DLPTC6/XL
connecting cable 1800mm (6 feet)
-  **e** DLSB/XL
on-off switch
-  **f** SL8CV
polycarbonate diffuser for 8W Slimlamp
SL14CV
polycarbonate diffuser for 14W Slimlamp
SL21CV
polycarbonate diffuser for 21W Slimlamp
SL28CV
polycarbonate diffuser for 28W Slimlamp
SL35CV
polycarbonate diffuser for 35W Slimlamp