

SlimLamp Slide-V

Universal Dimming Line Voltage LED for Cove Lighting

Strong, Secure with Smart Connection System



- Easy slide connection system
- Slim design with seamless lighting
- 0-10V dimming integrated ballast
- Round/Square Diffuser Available
- Slide-Up replacing system
- Tunable white available



Round diffuser
Standard



Square diffuser
Optional





Specification

Model Name	Voltage Input	Energy Consumption	Luminous Flux	Energy Efficiency	Color Rendering	Available Color	Operating temperature	Dimming
VSSL10 40K-UNV-C90	AC100-277V	10W	750 lm	80lm/W	Ra > 90	2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C	0-10V Dimming
VSSL15 40K-UNV-C90	AC100-277V	15W	1,200 lm	80lm/W	Ra > 90	2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C	0-10V Dimming
VSSL20 40K-UNV-C90	AC100-277V	20W	1,700 lm	80lm/W	Ra > 90	2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C	0-10V Dimming


Dimension

Model Name	Voltage Input (V)	Energy Consumption (W)	A (mm)	B (mm)	C (mm)
VSSL10 40K-UNV-C90	AC100-277	10	580	32.3	35.2
VSSL15 40K-UNV-C90	AC100-277	15	870	32.3	35.2
VSSL20 40K-UNV-C90	AC100-277	20	1,160	32.3	35.2


Notice

- Max.connection(Dimming) : 20 pcs
- Max.connection(Non dimming) : 400W
- 10W(40 pcs), 15W(26pcs), 20W(20 pcs)


* Standard type (Round diffuser)




* Optional type (Square diffuser)



Wire Diagram

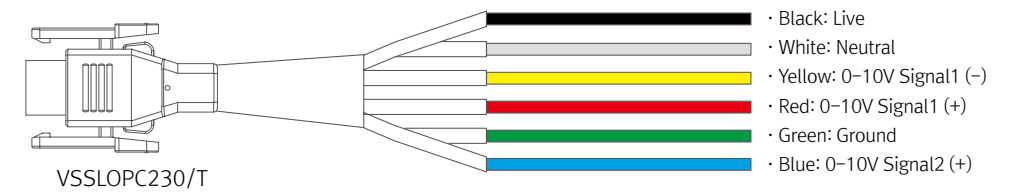

Connection

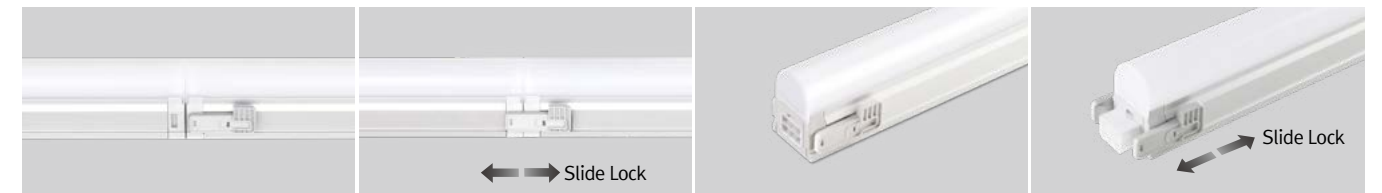

Accessories


Ⓐ Open power cord

VSSLOPC230/T	VSSLOPC1/T	VSSLOPC2/T	VSSLOPC4/T
1800mm(6feet)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)



Ⓑ Connecting cable

VSSLPTC/T	VSSLPTC1/T	VSSLPTC2/T	VSSLPTC4/T	VSSLPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

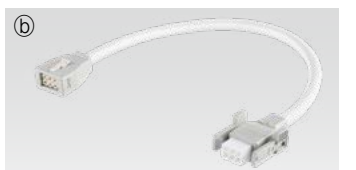

Ⓒ Mounting bracket

- SSL-BRACKET1(A) : 1set = 2pcs
- SSL-BRACKET1(B) : 1set = 3pcs



Ⓓ Angled bracket

- SSL-BRACKET2(A) : 1set=2pcs
- SSL-BRACKET2(B) : 1set=3pcs

