

## SlimLamp Slide-V

Strong, Secure with Smart Locking System

Universal Dimming Line Voltage LED  
for Cove Lighting



- Easy slide connection system
- Slim design with seamless lighting
- 1-10V dimming integrated ballast
- Round/Square Diffuser Available
- Slide-Up replacing system
- 100-277V Universal Voltage



Round diffuser  
Standard



Square diffuser  
Optional







### Specification

| Model Name         | Voltage Input | Lamp Power | Lumens     | Energy Efficiency | Color Rendering | Available Color                                  | Operating temperature | Dimming       |
|--------------------|---------------|------------|------------|-------------------|-----------------|--|-----------------------|---------------|
| VSSL5 40K-UNV-C90  | AC100~277V    | 4.9 W      | 410.4 lm   | 82 lm/W           | Ra > 90         | 2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K | 0~45°C                | 0-10V Dimming |
| VSSL10 40K-UNV-C90 | AC100~277V    | 9.2 W      | 730.3 lm   | 75 lm/W           | Ra > 90         | 2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K | 0~45°C                | 0-10V Dimming |
| VSSL15 40K-UNV-C90 | AC100~277V    | 14.8 W     | 1,208.3 lm | 82 lm/W           | Ra > 90         | 2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K | 0~45°C                | 0-10V Dimming |
| VSSL20 40K-UNV-C90 | AC100~277V    | 20.3 W     | 1,697.4 lm | 84 lm/W           | Ra > 90         | 2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K | 0~45°C                | 0-10V Dimming |


### Dimension

| Model Name         | Voltage Input (V) | Lamp Power (W) | A (mm) | B (mm) | C (mm) |
|--------------------|-------------------|----------------|--------|--------|--------|
| VSSL5 40K-UNV-C90  | AC100-277         | 4.9            | 320    | 32.3   | 35.2   |
| VSSL10 40K-UNV-C90 | AC100-277         | 9.2            | 580    | 32.3   | 35.2   |
| VSSL15 40K-UNV-C90 | AC100-277         | 14.8           | 870    | 32.3   | 35.2   |
| VSSL20 40K-UNV-C90 | AC100-277         | 20.3           | 1,160  | 32.3   | 35.2   |


### Notice

- Max.connection(Dimming) : 20pcs
- Max.connection(Non dimming) : 400W
- 5W(80pcs), 10W(40pcs), 15W(26pcs), 20W(20pcs)


\* Standard type (Round diffuser)

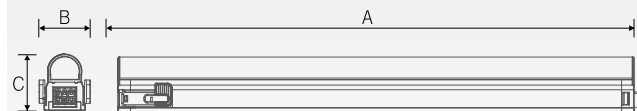


\* Optional type (Square diffuser)

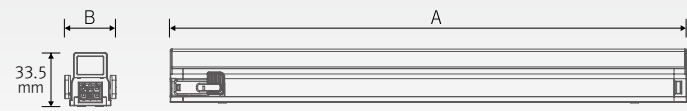

### Wire Diagram

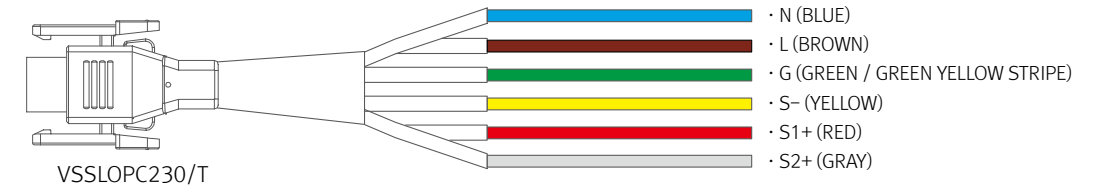

### Connection

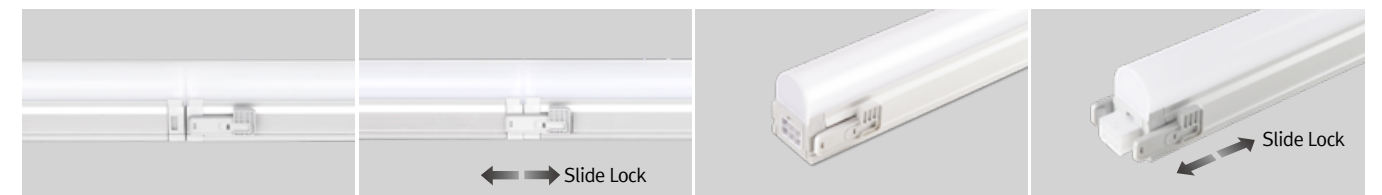

### Accessories


#### @ Open power cord

| VSSLOPC230/T  | VSSLOPC1/T   | VSSLOPC2/T   | VSSLOPC4/T     |
|---------------|--------------|--------------|----------------|
| 1800mm(6feet) | 300mm(1feet) | 600mm(2feet) | 1,200mm(4feet) |



#### ⓑ Connecting cable

| VSSLPTC/T    | VSSLPTC1/T   | VSSLPTC2/T   | VSSLPTC4/T     | VSSLPTC6/T     |
|--------------|--------------|--------------|----------------|----------------|
| 150mm(6inch) | 300mm(1feet) | 600mm(2feet) | 1,200mm(4feet) | 1,800mm(6feet) |

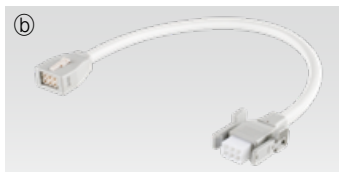

#### ⓒ Mounting bracket

- SSL-BRACKET1(A) : 1set = 2pcs
- SSL-BRACKET1(B) : 1set = 3pcs



#### ⓓ Angled bracket

- SSL-BRACKET2(A) : 1set = 2pcs
- SSL-BRACKET2(B) : 1set = 3pcs



#### ⓔ Magnet bracket

- SSL-BRACKET-M(A) : 1set = 2pcs
- SSL-BRACKET-M(B) : 1set = 3pcs

