

## TuneLight 2

Dimmable LED for cabinet

### Display for TuneLite



- AC Power driver built in
- Isolation circuit applied
- Perfect cabinet lighting with spot free
- Dimmable with available accessories
- On/off switch and motion sensor option





**Various options**




**Specification**

Model name	Power Input	Lamp Power	Lumens	Efficiency	Color Rendering	Available Color	Operating Temperature
TUN7 40K-UNV-C90	AC100-240V	7.4 W	444 lm	64 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C
TUN11 40K-UNV-C90	AC100-240V	11.5W	763 lm	66 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C
TUN15 40K-UNV-C90	AC100-240V	15.5 W	1,040 lm	67 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C
TUN7 40K-UNV-S	AC100-240V	7.4 W	444 lm	64 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C
TUN11 40K-UNV-S	AC100-240V	11.5 W	763 lm	66 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C
TUN15 40K-UNV-S	AC100-240V	15.5 W	1,040 lm	67 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,700K	0-45°C

**Dimension**

Model name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)
TUN7 40K-UNV-C90	AC100-240	7.4	526	52	18
TUN11 40K-UNV-C90	AC100-240	11.5	836	52	18
TUN15 40K-UNV-C90	AC100-240	15.5	1,145	52	18
TUN7 40K-UNV-S	AC100-240	7.4	526	52	18
TUN11 40K-UNV-S	AC100-240	11.5	836	52	18
TUN15 40K-UNV-S	AC100-240	15.5	1,145	52	18

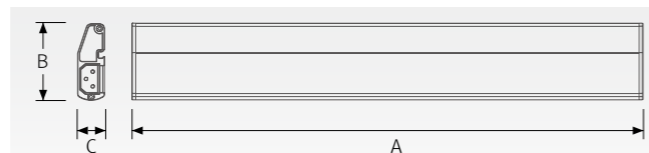

**Max. connection**

- Max. connection(Dimming) : 20pcs
- Max. connection(Non-Dimming) : 400W  
7W(57pcs), 11W(36pcs), 15W(26pcs)

**Accessories**

**Ⓐ Connecting cable for Non-dimming**

TUNPTC/T	TUNPTC1/T	TUNPTC2/T	TUNPTC4/T	TUNPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

**Ⓑ Connecting cable for dimming**

DTUNPTC/T	DTUNPTC1/T	DTUNPTC2/T	DTUNPTC4/T	DTUNPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

**Ⓒ Power Cord (1,800mm)**

TUNPC230/T

**Ⓓ Power Cord (1,800mm)**

TUNPC230/SM2/T

**Ⓔ Open Power Cord (1,800mm)**

DTUNOPC230/T

**Ⓕ Open Power Cord**

DTUNOPC230/SM2/T

**Ⓖ Direct connector**

TUNPL

**Ⓗ End Cap**

TUN-CAP

**Ⓘ Mounting bracket**

TUN-Bracket

**Ⓛ Mounting bracket**

TUN-Bracket 1

**Ⓚ Dimming Interface (Phase to PWM translator)**

FDA-P1H : 1CH 200W (200W/CH, 1CH)

**Ⓛ Dimming Interface (DMX512 to PWM translator)**

FDA-P2M : 2CH Max 400W (200W/CH, 2CH)

**Ⓜ Dimming Interface (0-10V/1-10V to PWM translator)**

DA02V10SE : Max. 400W (200W/CH, 2CH)

**Ⓝ Motion sensors**

TUN-OSM

