FLX Spot DVS Swivel LED for Kitchen cabinet, Displays & Funiture


Super Slim Swivel LED Spotlight











- Single 4W diode eliminates multiple shadows
- Virtually no heat emission and no UV radiation
- Available in silver, bronze, white, black
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

















Specification


Model Name	Color	Power Input	Lamp Power	Luminous Flux	Efficiency	Color Rendering	Available Color	Beam Angle	Operating Temperature
DVS4A 40K-24V-SW-WT-25	White	DC24V	4.3W	485lm	108lm/w	Ra > 85	2,700K/3,000K/3,500K/4,000K/5,700K	25°	0~45℃
DVS4A 40K-24V-SW-WT-45	Black Silver	DC24V	4.3W	500lm	109lm/w	Ra > 85	2,700K/3,000K/3,500K/4,000K/5,700K	45°	0~45℃
DVS4A 40K-24V-SW-WT-60	Gold	DC24V	4.3W	485lm	105lm/w	Ra > 85	2,700K/3,000K/3,500K/4,000K/5,700K	60°	0~45℃

Max. connection

- FLX Spot DVS Swivel: Max 7pcs in a row
- LED Driver

Model Name	Max. units for LED driver				
Model Name	24V/15W	24V/30W	24V/75W	24V/200W	
DVS4A 40K-24V-SW	3	7	17	47	

Dimension

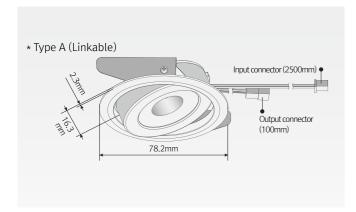

Installation

Linkable between FLX Spot DVS Swivel & FLX Spot DVS Swivel




Linkable between FLX Spot DVS Swivel & FLX series



Linkable between FLX series & FLX Spot DVS Swivel



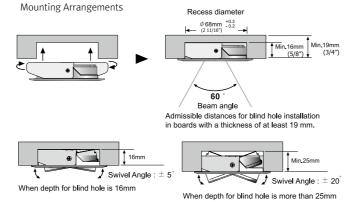

Various options







Swivels and tilts 20°

Accessories

@ FLX Spot DVS Swivel						
	White	Black	Bronze	Silver		
DV:	S4A 40K-24V-SW-WT	DVS4A 40K-24V-SW-BK	DVS4A 40K-24V-SW-BZ	DVS4A 40K-24V-SW-SV		

(b) Extension cable: DVSPTC (2,500mm)

Between FLX Spot Swivel & FLX Spot DVS or 12 way distributor

© Connecting cable: NDVDVSPTC (1,000mm)

Between FLX Spot DVS Swivel & FLX Stix NDV * Available Color: Black, Gray

@ Connecting cable: NDPDVSPTC (1,000mm)

Between FLX Spot DVS Swivel & FLX Stix NDP * Available Color: Black, Gray

@ Connecting cable: NDVPC (2,500mm)

Between FLX Stix NDV & FLX Spot DVS Swivel

① Connecting cable: NDPPC (2,500mm)

Between FLX Stix NDP & FLX Spot DVS Swivel

(1,800mm) © LED Driver with 12way distributor, with power cord (1,800mm)

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V-P/ 1
Capacity	15W 24V	30W 24V	75W 24V

(h) LED Driver: FLC200-24V/T (200W, DC24V)

LED Driver With 12way distributor

i) Dimming Interface (1-10V): FDC-L10

Max. 100W (100W/CH, 1CH)

① Dimming Interface (0-10/1-10, DMX512)

FDA-L2M0: Max. 200W (100W/CH, 2CH) FDA-L5M: Max. 200W (50W/CH, 5CH)

® Dimming Interface (Dail): FDD-L1DA

Max. 200W (100W/feed, 2feeds)

① Door and motion detection sensor: FLS-M24V

Voltage: DC 24V

@ Human-body detection sensor: FLS-P24V

Voltage: DC 24V



























70