NDPro Showcase Arm

LED for Showcase and Display
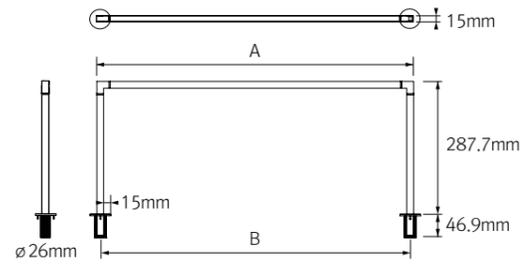
Rotatable Arm for NDPro

CE c(UL)us LISTED EHC ⟨III⟩ ⌀

– Aluminum body with rotating top bar
– Easy assembly with NDPro fixture
– Various length available
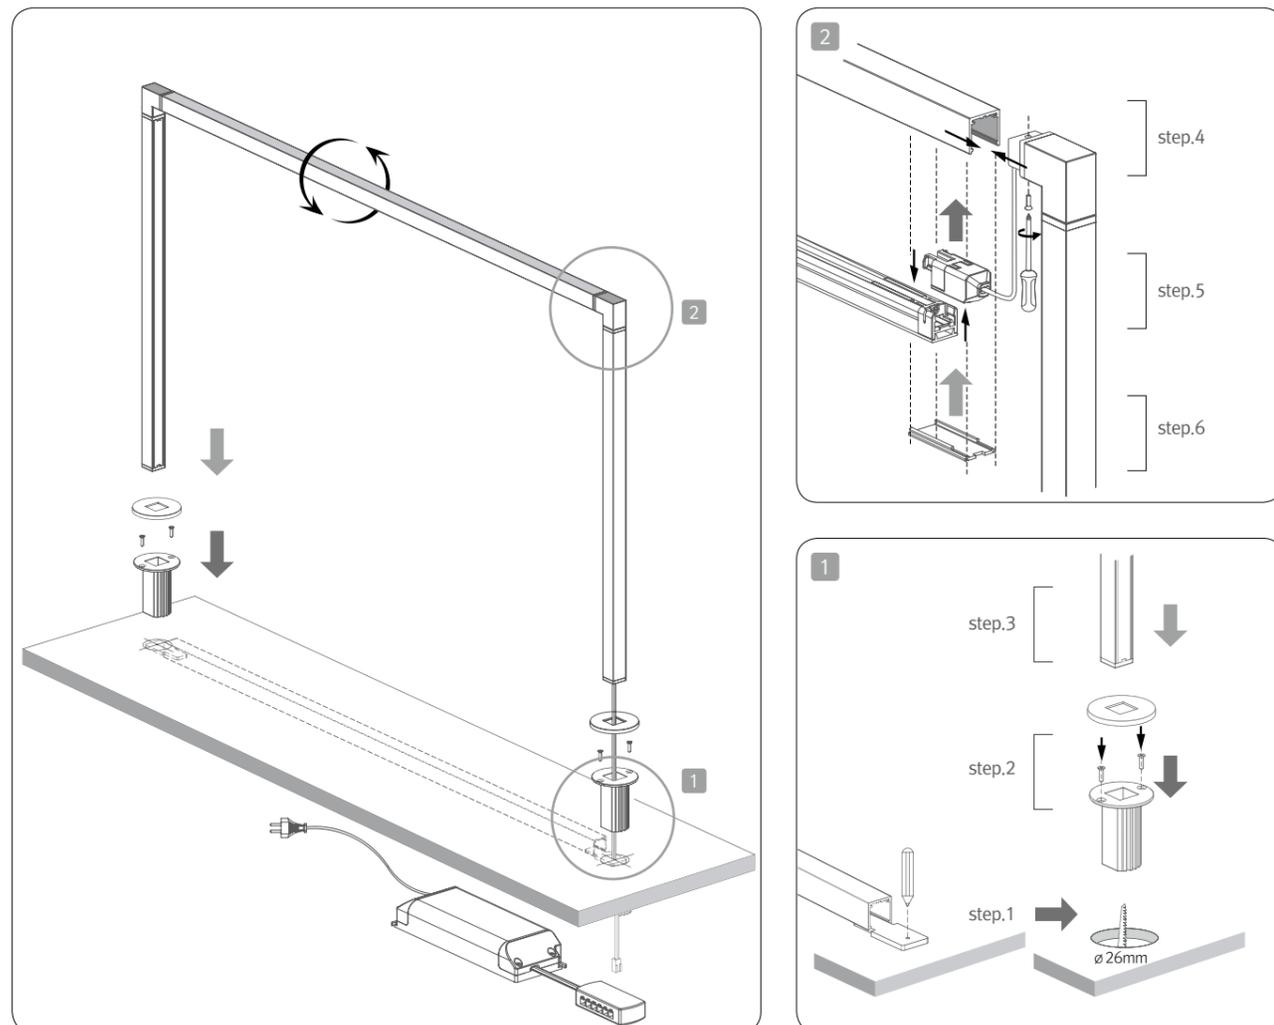– Ideal for showcase or exhibition

Dimensions

15mm

A

287.7mm

15mm

46.9mm

ø 26mm

B
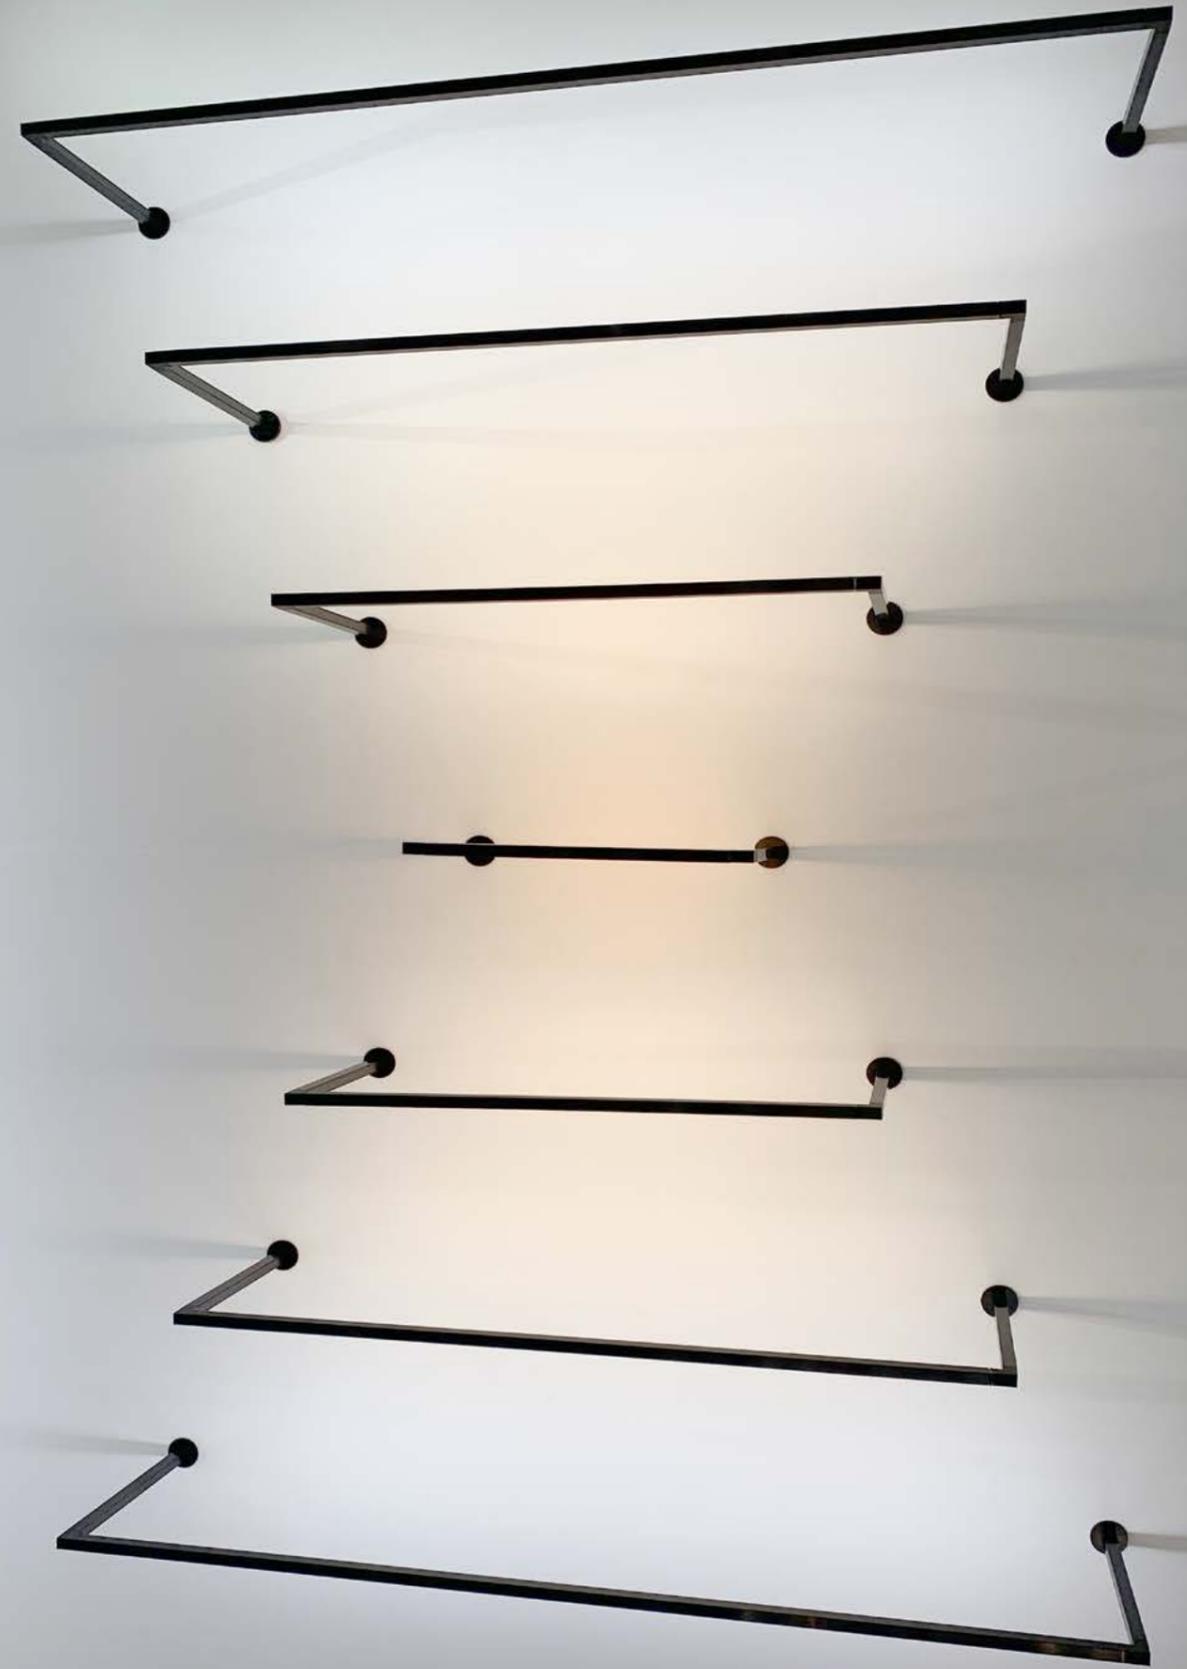
NDPro Showcase Arm for	Lamp Power	Luminous Flux (4000K)	A (Top Length)	B (Recommended Distance for Mounting Holes)
NDP4 40K–24V–C90	4W	320lm	396.5mm	381mm
NDP7 40K–24V–C90	7W	560lm	676.5mm	661mm
NDP11 40K–24V–C90	11W	880lm	955.5mm	940mm
NDP15 40K–24V–C90	15W	1,200lm	1,234.5mm	1,219mm

Various options

Rotate

Installation

2

2

1

2

step.4

step.5

step.6

1

step.3

step.2

step.1

ø 26mm

Required Accessories

ⓐ
ⓑ
ⓒ
ⓕ
ⓖ
ⓓ
ⓔ
ⓗ
ⓘ
ⓙ

* Item ⓐⓑ are sold separately

ⓐ LED Driver
ⓑ FLX Stix NDPro
ⓒ Top Bar
ⓓ Fix Cover ⎤ NDProTop Bar

ⓔ Hole guide
ⓕ Side Pole
ⓖ Power Pole
ⓗ Mounting Base
ⓘ Mounting Base Cover
ⓙ Screw ⎤ NDP Showcase Arm Kit

Accessories

ⓐ NDP Showcase Arm Kit : NDP–SA–KIT

ⓐ

ⓑ NDPro Top Bar

NDP4TB
NDP7TB
NDP11TB
NDP15TB

ⓑ

ⓒ NDPro Fixture

NDP4 40K–24V–C90
NDP7 40K–24V–C90
NDP11 40K–24V–C90
NDP15 40K–24V–C90

ⓒ

ⓓ LED Driver with 12way distributor, with power cord (1,800mm)

Part NO	FLC30–24V/T	FLC75–24V–P/T
Capacity	24V/30W	24V/75W

ⓓ