

FLXible Neon 1*Super Slim Flexible LED With Spot-free Output*

Curve Perfection with FLXible Neon



- Bend direction horizontally
- Ultra slim spot free illumination
- Dimmable
- Indoor and outdoor application
- Field Cuttable (38.5mm) for customized length
- Available in standard lengths of 1, 2, 3, 4, 5M reels
- Fully sealed with Silicon material for wet location






Specification


Model Number	Power Input	Lamp Power	Lumens/m	Color Temperature	Color Rendering	Operating Temperature	Material
FN1 22K-24V-1M	DC 24V	10 W	349 lm	2,200K	Ra > 90	-10°C to 50°C	Silicon
FN1 24K-24V-1M			401lm	2,400K			
FN1 27K-24V-1M			410 lm	2,700K			
FN1 30K-24V-1M			424 lm	3,000K			
FN1 35K-24V-1M			429 lm	3,500K			
FN1 40K-24V-1M			406 lm	4,000K			

* IP Rate
 IP67 with Factory Termination (Customized Length Available)
 IP65 with Field Termination
 IP20 with Indoor Termination


Powerfeed type

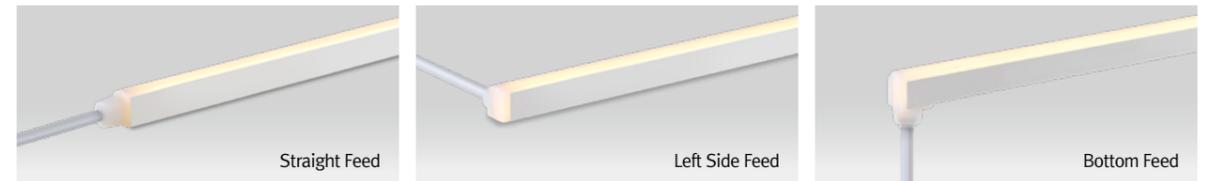






Installation

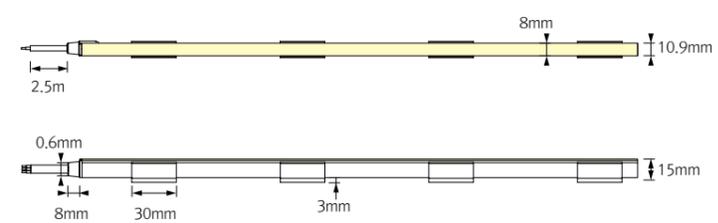


* Bracket Installation per 25cm is recommended
 (4 pcs of brackets are provided per meter)
 Additional Brackets can be used, if necessary

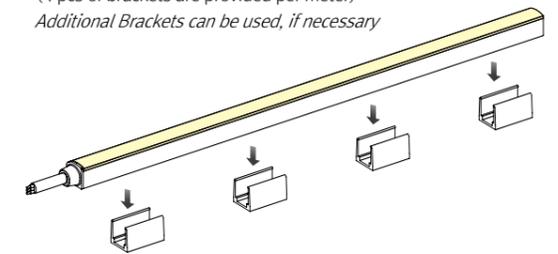


Physical specifications

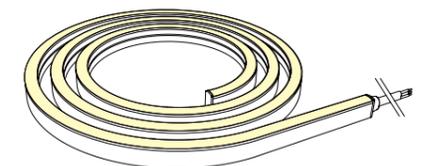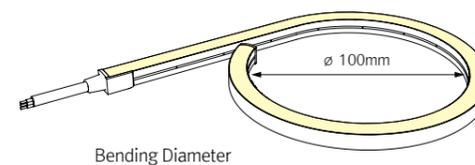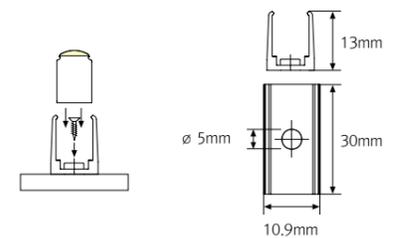


Straight Feed

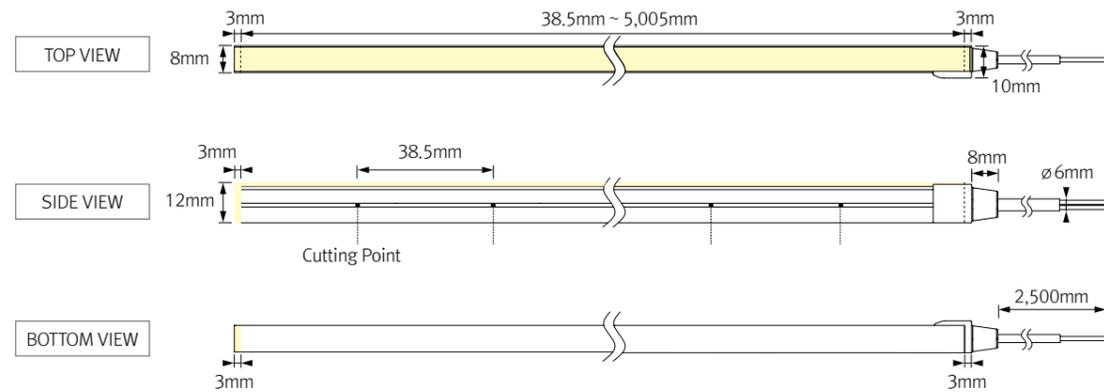

Left Side Feed

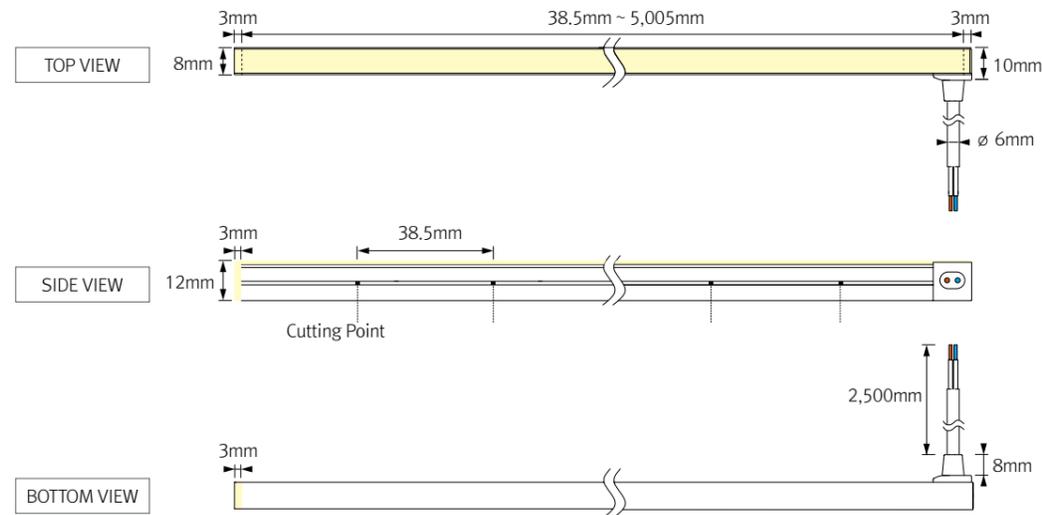

Bottom feed

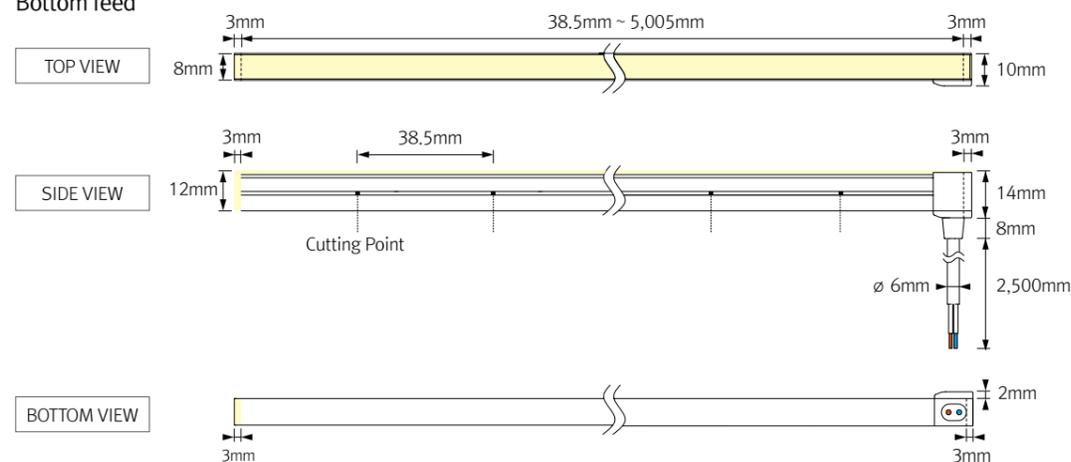

FLXible Neon can be cut every 38.5mm.
Please follow the cutting point mark to cut precisely as needed.

Accessories

Ⓐ FLXible Neon 1 Straight Feed (Customized Length Available)

- FN1 40K-24V (5m) FN1 40K-24V (2m)
- FN1 40K-24V (4m) FN1 40K-24V (1m)
- FN1 40K-24V (3m)

Ⓑ FLXible Neon 1 Left Side Feed (Customized Length Available)

- FN1 40K-24V-LS (5m) FN1 40K-24V-LS (2m)
- FN1 40K-24V-LS (4m) FN1 40K-24V-LS (1m)
- FN1 40K-24V-LS (3m)

Ⓒ FLXible Neon 1 Bottom Feed (Customized Length Available)

- FN1 40K-24V-BS (5m) FN1 40K-24V-BS (2m)
- FN1 40K-24V-BS (4m) FN1 40K-24V-BS (1m)
- FN1 40K-24V-BS (3m)

Ⓓ Mounting Brackets

- FN1-BRACKET1, 1set = 4pcs

Ⓔ FN1 Extrusion Line (1,200mm)

- FN1-EXL

Ⓛ Angled Brackets (15° & 40°)

- FN1-BRACKET2 : 1set = 4pcs

Ⓜ Expanding Stick

- FN-EPS

Ⓝ Indoor Power Cable Straight Feed (Max.62.5W)

- FN1-INPC (2,500mm) with END CAP

Ⓞ Indoor Power Cable Left Side Feed (Max.62.5W)

- FN1-INPC-LS (2,500mm) with END CAP

Ⓟ Indoor Direct Connector

- FN1-INCP

Ⓠ Indoor Connecting Cable

- FN1-INPTC (150mm) FN1-INPTC4 (1,200mm)
- FN1-INPTC1 (300mm) FN1-INPTC6 (1,800mm)
- FN1-INPTC2 (600mm)

Ⓡ Field Termination (IP65)

- FN1-FTKIT

Ⓢ LED Driver with 12way distributor, with power cord (1,800mm)

Part No	FLC30-24V/T	FLC75-24V-P/T
Capacity	30W 24V	75W 24V

Ⓣ LED Driver : FLC200-24V/T (200W, DC24V)

- LED Driver with 12way distributor

Ⓤ Dimming Interface (0-10 V) : FDC-L10

- Max. 100W (100W/CH, 1CH)

Ⓡ Dimming Interface (0-10/1-10, DMX512)

- FDA-L2M0 : Max. 200W (100W/CH, 2CH)
- FDA-L5M : Max. 200W (50W/CH, 5CH)

Ⓢ Dimming Interface (Dai) : FDD-L1DA

- Max. 200W (100W/CH, 1CH)

