

FLXible Neon 1 Dual


Super Slim Flexible LED With Spot-free Output

Shift Your Mood with Flexibility



- Bend direction horizontally
- Ultra slim spot free illumination
- Dimmable with 0-10V, forward/reverse phase
- Indoor and outdoor application
- Field cuttable (38.5mm) for customized length
- Available in standard lengths of 1, 2, 3, 4, 5M reels
- Tunable white



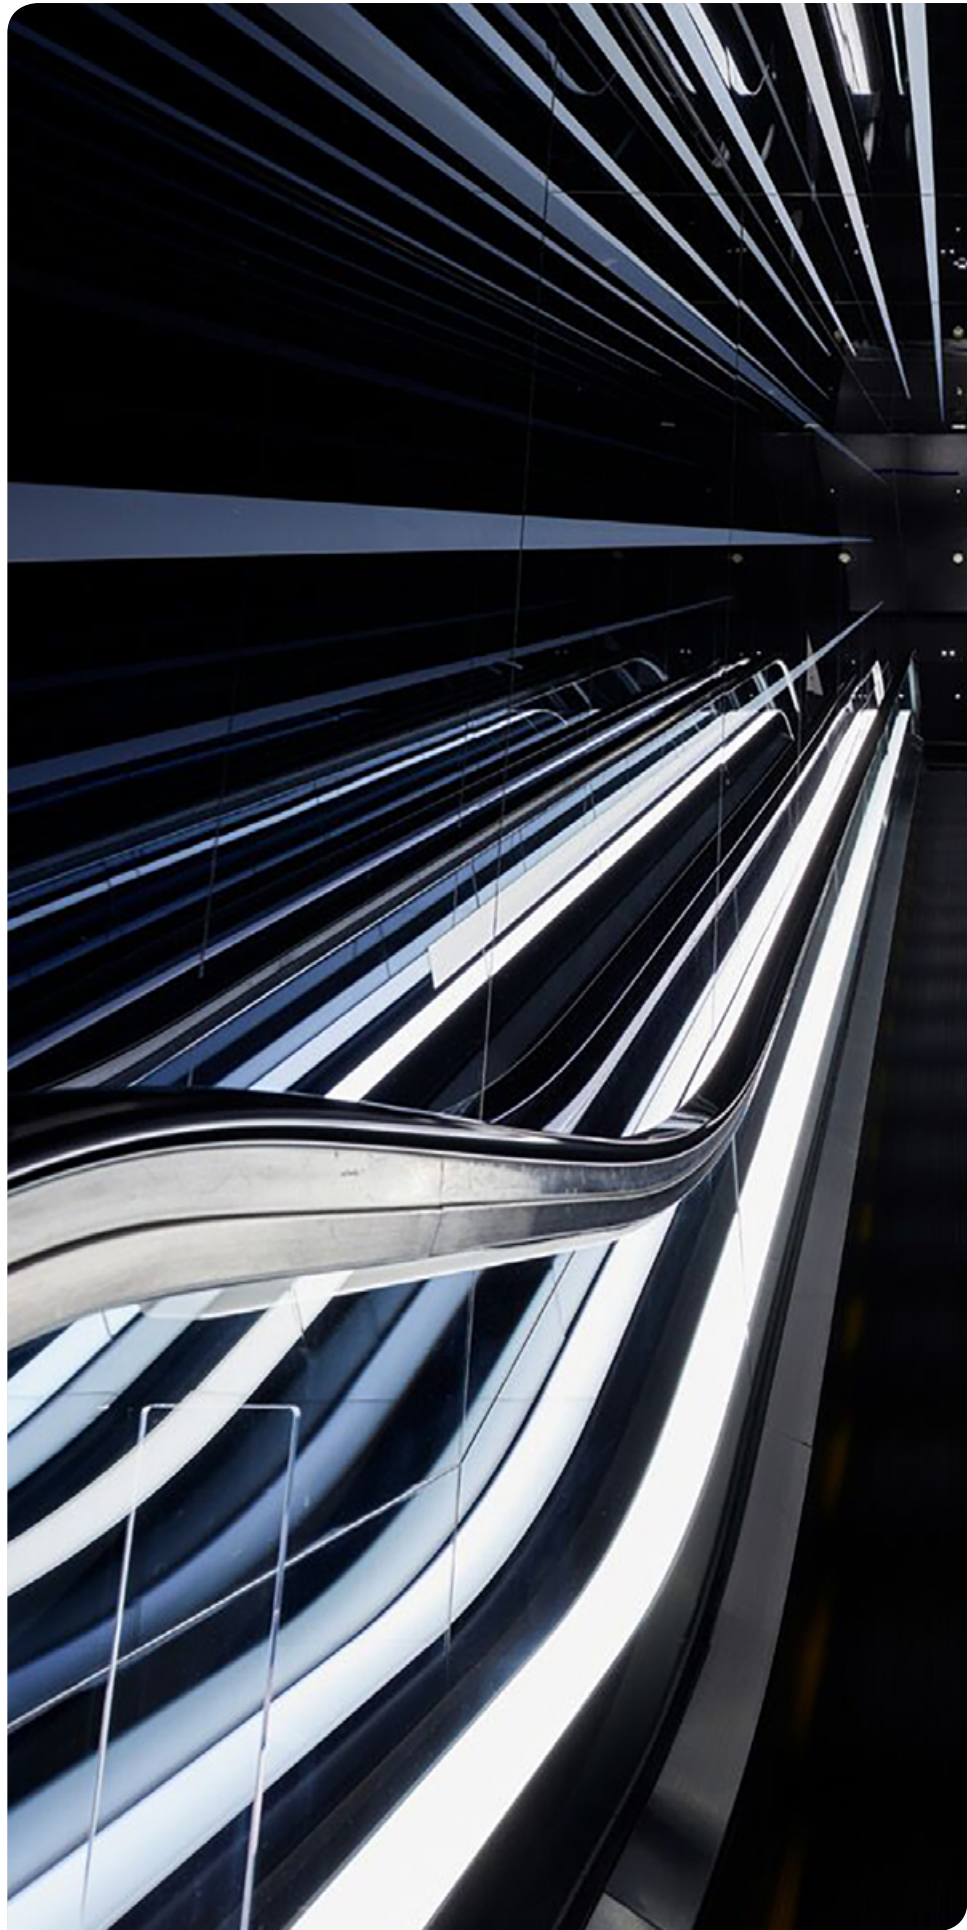


Specification

Model Number	Power Input	Lamp Power	Lumens	Color Temperature	Color Rendering	Operating Temperature
FN1 SC-24V-1M	DC 24V	19.17 W	504.6 lm	2,200K ~ 4,000K	Ra > 80	-10°C to 50°C


* IP Rate
 IP67 with Factory Termination (Customized Length Available)
 IP65 with Field Termination
 IP20 with Indoor Termination

100% Brightness


Various options

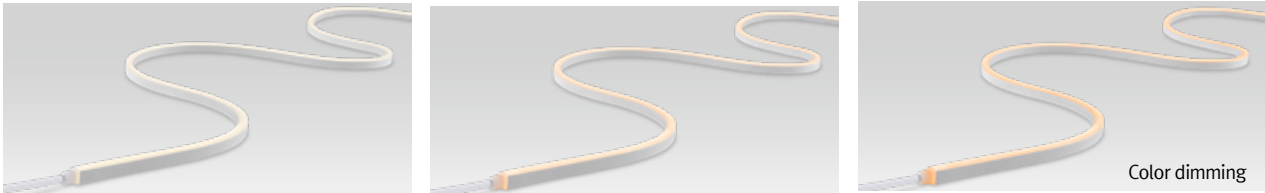


Powerfeed type

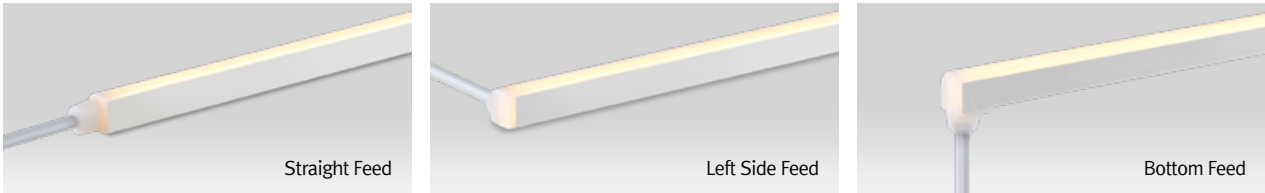




Installation

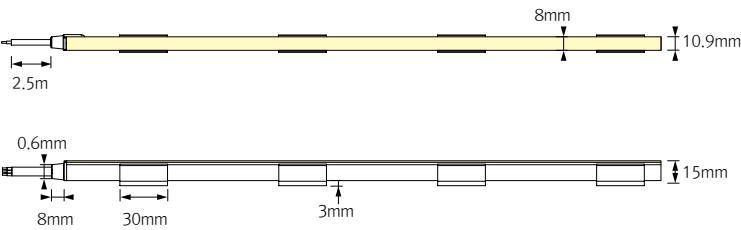


* Bracket Installation per 25cm is recommended
 (4 pcs of brackets are provided per meter)
 Additional Brackets can be used, if necessary

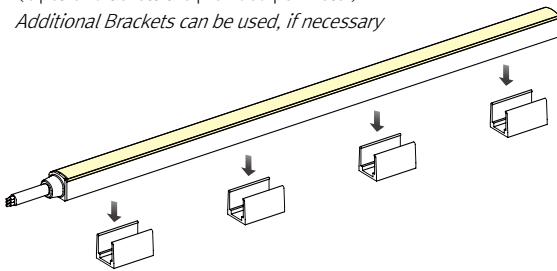


Physical specifications

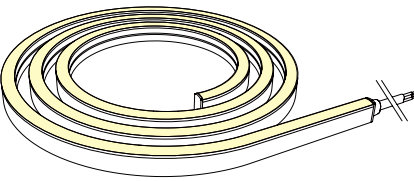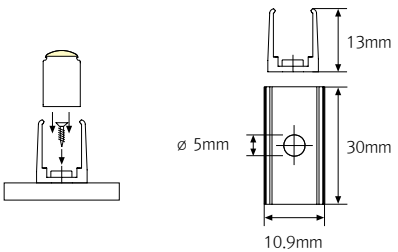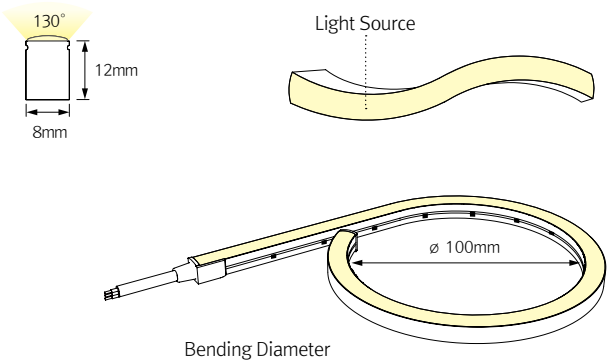


Straight Feed

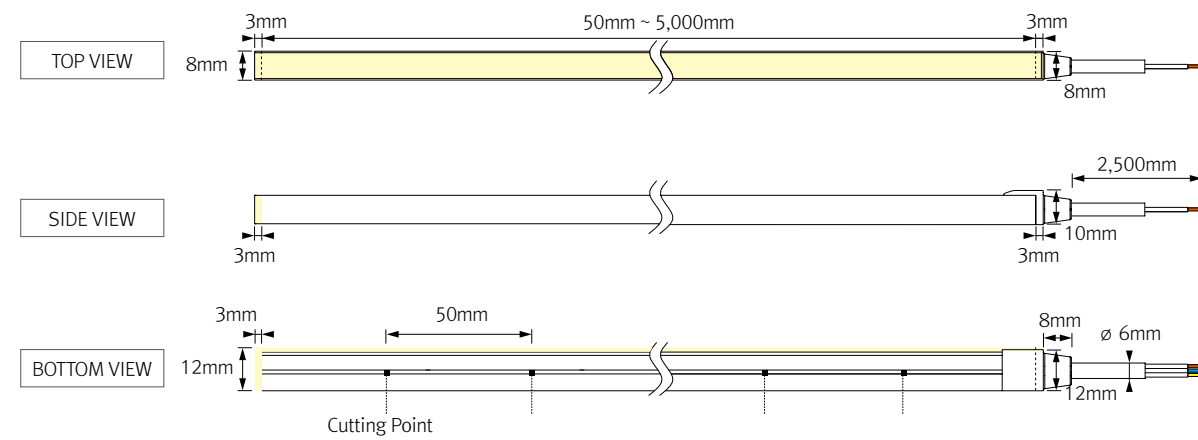

Left Side Feed

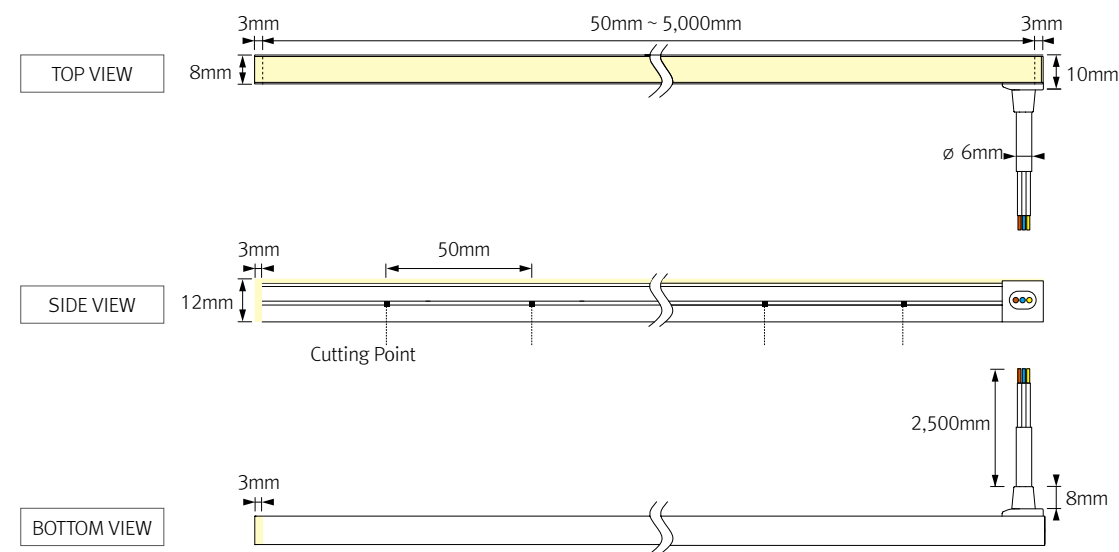

Bottom feed

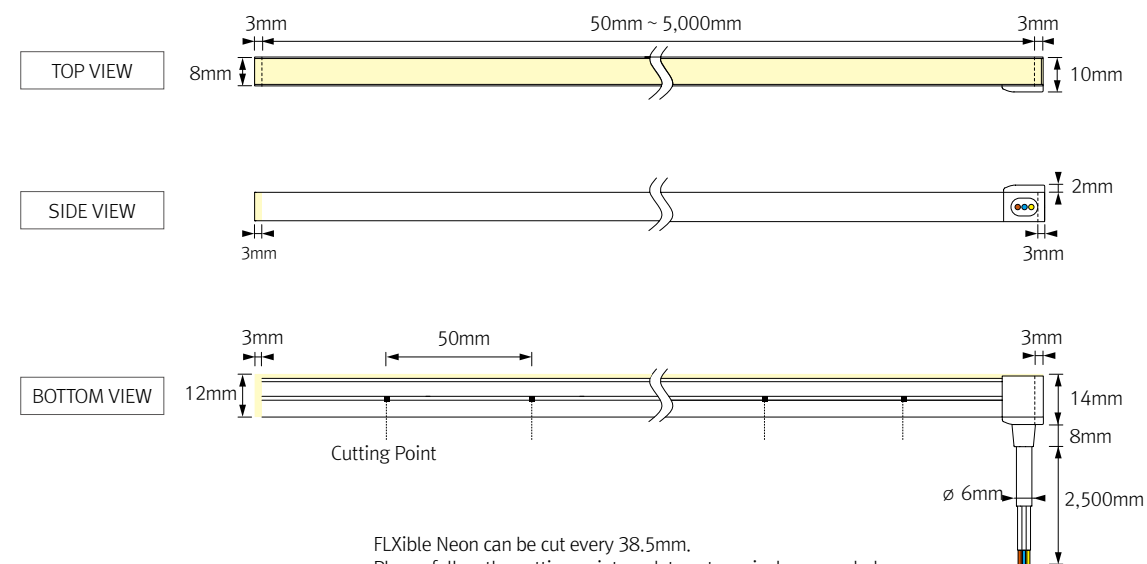

Accessories

Ⓐ FLXible Neon 1 Straight Feed (Customized Length Available)

FN1 SC-24V (5m)	FN1 SC-24V (2m)
FN1 SC-24V (4m)	FN1 SC-24V (1m)
FN1 SC-24V (3m)	

Ⓑ FLXible Neon 1 Left Side Feed (Customized Length Available)

FN1 SC-24V-LS (5m)	FN1 SC-24V-LS (2m)
FN1 SC-24V-LS (4m)	FN1 SC-24V-LS (1m)
FN1 SC-24V-LS (3m)	

Ⓒ FLXible Neon 1 Bottom Feed (Customized Length Available)

FN1 SC-24V-BS (5m)	FN1 SC-24V-BS (2m)
FN1 SC-24V-BS (4m)	FN1 SC-24V-BS (1m)
FN1 SC-24V-BS (3m)	

Ⓓ Mounting Brackets

FN1-BRACKET1, 1set = 4pcs

Ⓔ FN1 Extrusion Line (1,200mm)

FN1-EXL

Ⓘ Angled Brackets (15° & 40°)

FN1-BRACKET2 : 1set = 4pcs

Ⓖ Expanding Stick

FN-EPS

Ⓗ LED Driver with 12way distributor, with power cord (1,800mm)

Part No	FLC30-24V/T	FLC75-24V-P/T
Capacity	30W 24V	75W 24V

Ⓙ LED Driver : FLC200-24V/T (200W, DC24V)

LED Driver With 12way distributor

Ⓛ Dimming Interface (0-10/1-10, DMX512)

FDA-L2M0 : Max. 200W (100W/CH, 2CH)
FDA-L5M : Max. 200W (50W/CH, 5CH)

Ⓚ Control Interface : FDD-L20

Max. 200W (100W/CH, 1CH)

