

## LuxFeel Spot 50

Precision within minimum space

LED Spotlight




- Ultra low profile
- Ideal for furniture and showcases
- Precision within minimum space
- High color rendering(CRI95)
- Aluminum body
- To be used with constant current distributor







### Installation

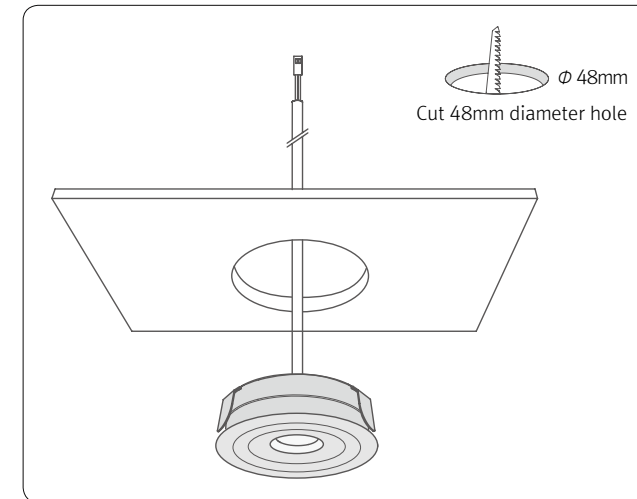


### Light output




### Specification

| Model Name          | Voltage Input | Current Input | Energy Consumption | Luminous Flux | Energy Efficiency | Color Rendering | Available color                   | Material |
|---------------------|---------------|---------------|--------------------|---------------|-------------------|-----------------|-----------------------------------|----------|
| LS50-3<br>40K-900mA | Typ. 3.2V     | 900 mA        | 2.8 W              | 190 lm        | 65 lm/W           | Ra > 95         | 2,700K / 3,000K / 3,500K / 4,000K | AL       |

### Dimension

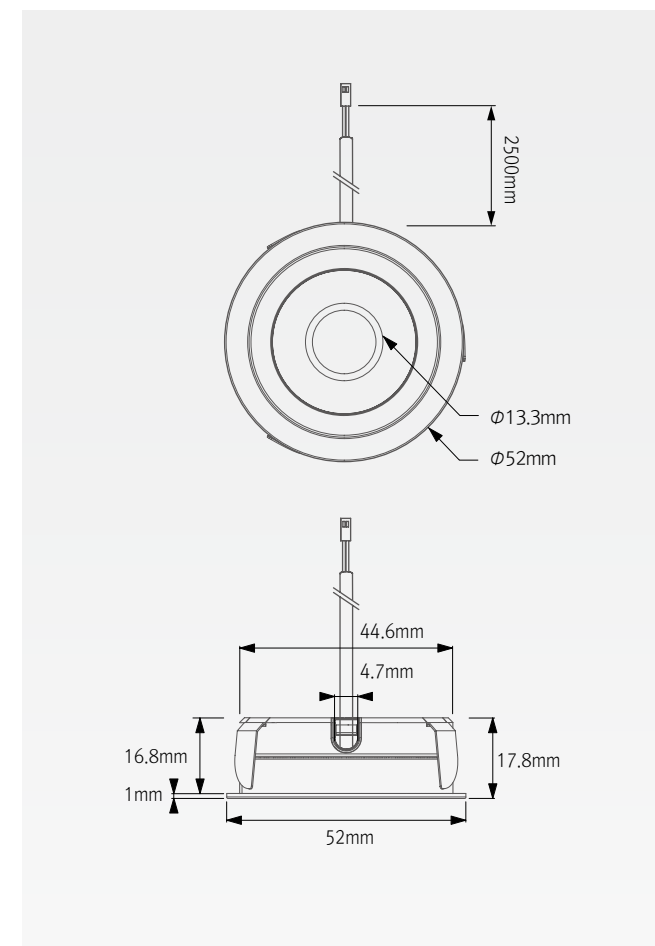

### Photometric data

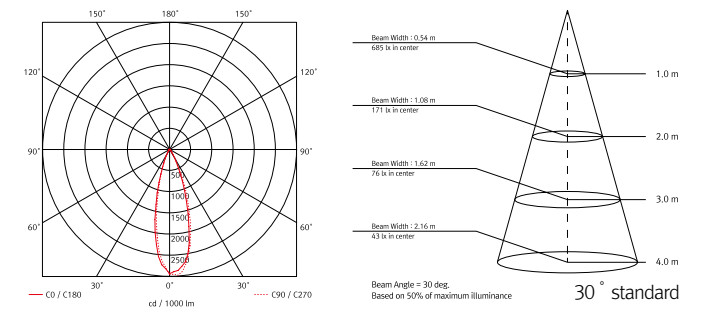

### Accessories

#### ① 5 way CC Distributor (CV to CC converter)

INPUT : DC24V  
Constant output current : 900mA  
Output Voltage range : 3~16V  
1~10V Dimming



#### ② LED Driver with 12way distributor with power cord (1,800mm)

| Part NO  | FLC15-24V/T | FLC30-24V/T | FLC75-24V-P/T |
|----------|-------------|-------------|---------------|
| Capacity | 15W 24V     | 30W 24V     | 75W 24V       |

