TEST REPORT

1. Applicant

* Client Name : FEELUX Co. Ltd.
* Address : 235-48 Gwangjeok-ro Gwangjeok-myeon Yangju-si Gyeonggi-do 482-844 Korea
* Date of Receipt : 260903

2. Purpose of Report :

3. Number of Report : KH FEELUX

4. Test Standard / Item : / 260903 FNX3D 35K-24V-C90_lot202608

5. Test Period : 260903 ~ 260903

6. Test Environment

* Ambient Temp. : 25.0 +- 3 ℃
* Relative Humidity : 60.0 +- 10 % RH

7. Test Item

* Name of Product :
* Rating :
* Model :

8. Test Result : Refer to the attachment

Confirmation	Test by 김정도 Sign	Technical manager 김정도 Sign

****

* The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
* This report cannot be reporduced, except in full.
* This report is for reference only. It cannot replace the report by standard organization(s).

Result

Report Number	Sample Name	Sample Number	Test Standard
KH FEELUX			


Test Item	Unit	Result	Notice
Beam Distribution Test		See Attachement	
ATHD	%	35.7	
CIE 1931 Cx, Cy		0.4081 , 0.3959	
Correlated Color Temperature	K	3482	
Ra		92.04	
Power Factor		0.584	
Input Voltage	V	220.54	
Input Current	A	0.140	
Input Watt	W	18.031	
Lamp Flux	lm	1086	
Efficient	lm/W	60.23	
luminous Intensity (Max , Center)	cd	374 , 373	
Illuminance	lx	373	1 m
		93	2 m
		41	3 m

* This test result is for the sample provided by the client.
* Sample photo

Click to load image


Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	22	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Luminous Intensity Distribution

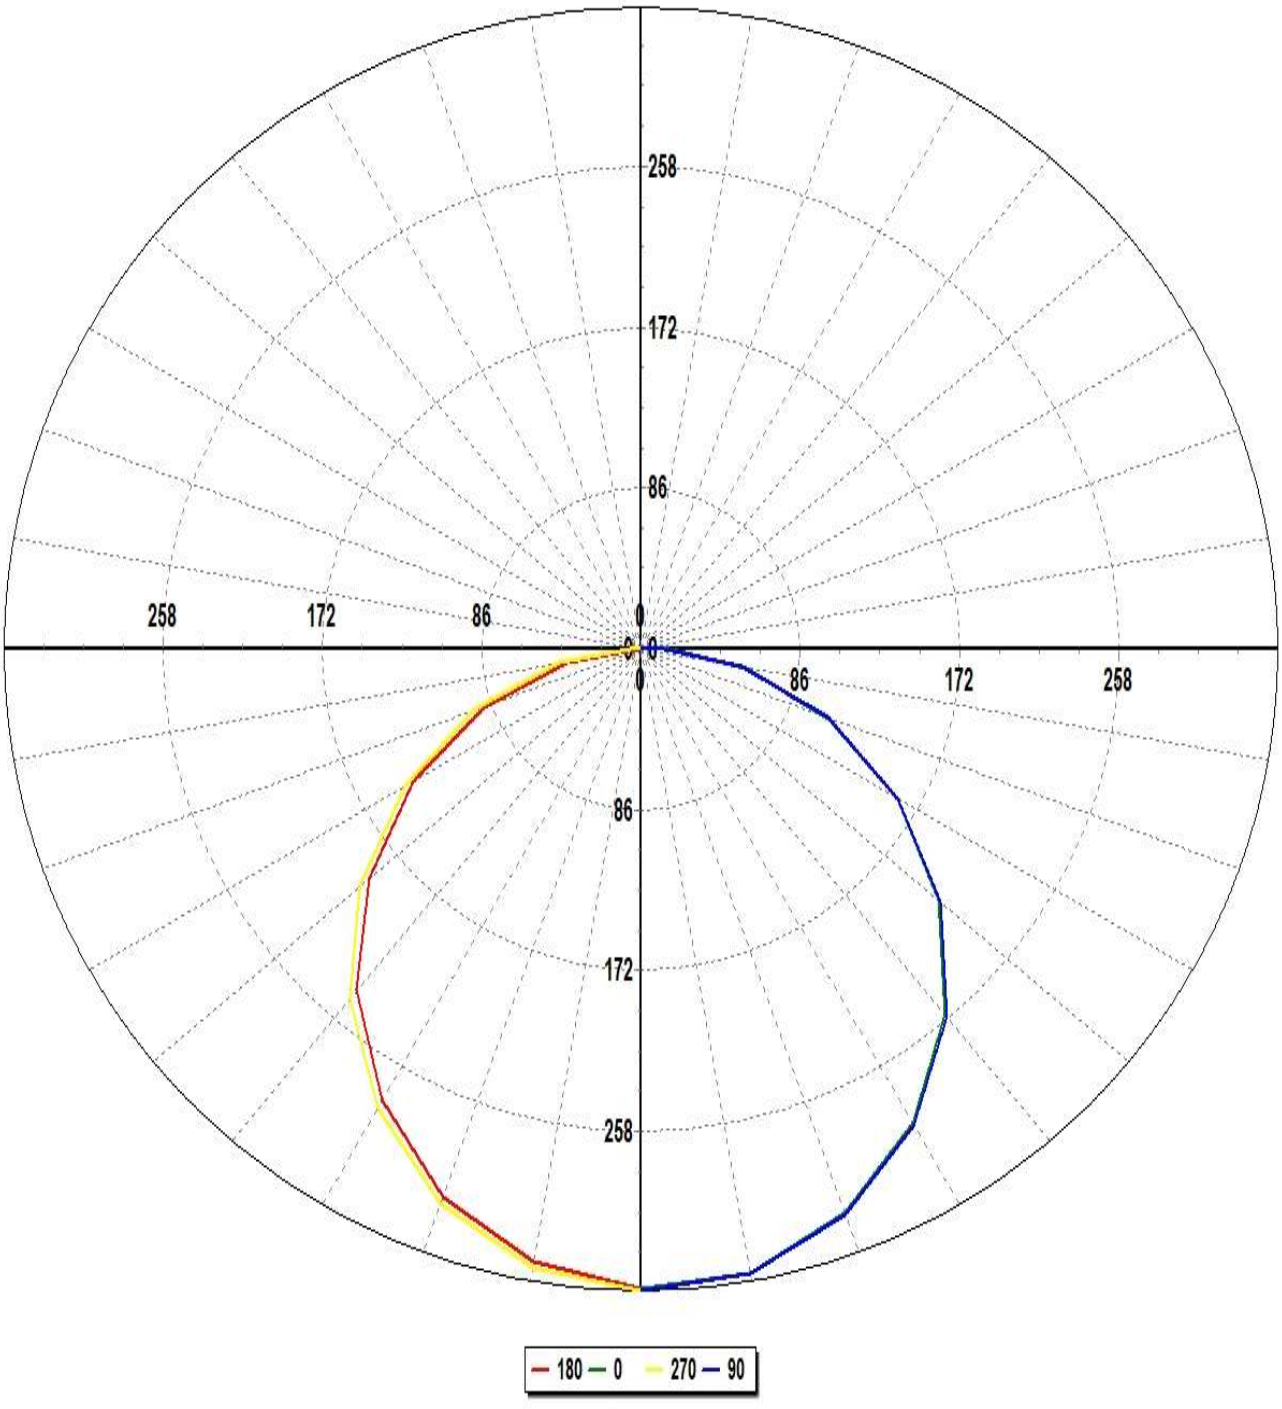

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	22	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Luminous Intensity Distribution (Lowest 10%)

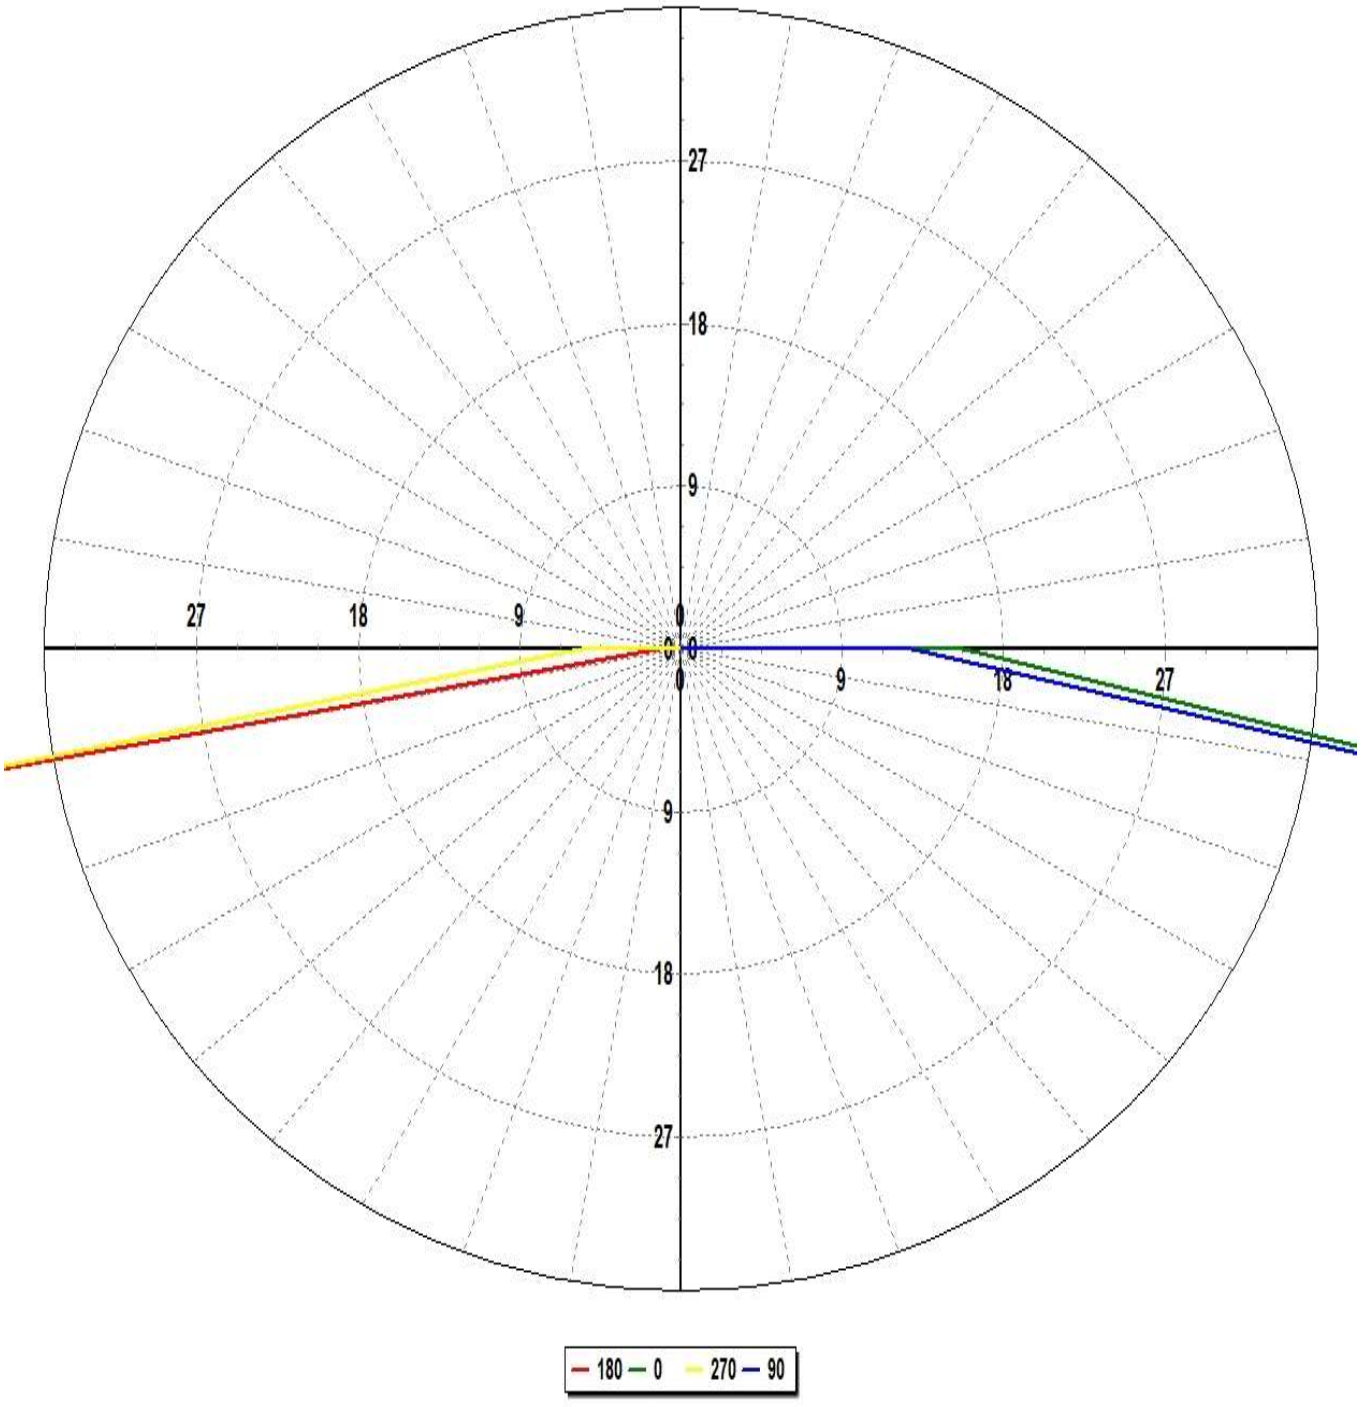

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	2	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Luminous Intensity Data

Maximum (cd) : 374
Minimum (cd) : 1

G/C	0	10	20	30	40	50	60	70	80	90	100
0	372.22	371.49	371.51	371.99	371.09	371.93	371.17	371.52	371.12	373.37	372.93
10	369.14	368.43	368.88	368.58	370.16	370.33	370	370.29	370.62	368.71	368.08
20	349.23	350.25	351.61	353.32	354.43	354.88	355.39	356.71	356.97	350.04	349.26
30	319.2	320.43	322.18	323.25	326.22	326.94	328.43	329.34	329.75	320.35	318.82
40	277.22	278.77	281.94	283.98	286.72	287.93	289.96	290.7	291.52	278.85	276.51
50	227.37	229.43	234.13	234.78	238.94	240.74	242.9	243.61	244.82	228.92	227.42
60	174.08	175.83	179.49	181.79	184.28	186.83	189.66	190.46	192.25	174.02	172.21
70	117.58	119.51	122.85	125.1	128.23	130.52	133.15	133.97	135.25	116.46	115.85
80	62.47	64.09	67.42	69.76	72.33	74.02	76.41	76.47	78.31	59.81	58.18
90	17.11	10.95	21.75	15.41	26.28	19.48	30.04	22.62	31.53	14.01	7.57

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	2	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Luminous Intensity Data (Continued)

Maximum (cd) : 374
Minimum (cd) : 1

G/C	110	120	130	140	150	160	170	180	190	200	210
0	373.8	373.62	372.9	372.6	371.31	373.15	373.31	372.22	371.49	371.51	371.99
10	367.85	367.25	366.64	365.64	365.07	364.17	363.4	361.89	360.78	360.78	359.71
20	348.9	347.39	347.16	344.76	343.57	341.65	340.64	339.05	337.85	336.21	335.36
30	318.21	316.33	314.57	311.55	310.87	308.21	306.17	303.29	302.87	300.45	298.96
40	276.28	274.48	272.17	269.06	267.18	264.08	262.56	259.16	257.78	255.09	254.99
50	226.45	224	222.82	219.12	216.82	213.1	211.45	207.74	207.12	203.69	203.15
60	171.3	169.08	167.85	163.8	162.18	158.72	156.79	153.82	152.42	148.83	147.98
70	114.53	112.55	111.58	107.82	106.54	103.05	100.93	98.08	96.37	93.64	93.32
80	58.1	56.33	55.7	52.6	51.05	48.77	46.77	43.95	42.49	40.22	39.11
90	12.07	6.39	10.31	4.26	6.62	1.91	3.59	1.33	1.79	1.87	3.1

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	2	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Luminous Intensity Data (Continued)

Maximum (cd) : 374
Minimum (cd) : 1

G/C	220	230	240	250	260	270	280	290	300	310	320
0	371.09	371.93	371.17	371.52	371.12	373.37	372.93	373.8	373.62	372.9	372.6
10	358.91	359.5	358.66	358.43	358.26	365.09	364.3	365.94	365.38	365.5	365.92
20	334.16	334.05	333.45	332.37	331.06	343.74	343.34	344.33	344.8	344.3	345.07
30	297.05	297.47	295.68	295.51	294.03	308.97	310.19	310.59	310.92	311.78	313.3
40	252.26	252.26	249.85	249.97	248.14	265.52	267.29	267.26	267.72	267.77	270.8
50	199.63	199.5	197.47	197.69	195.82	215.09	216.59	215.62	218.13	218.12	220.4
60	145.4	144.43	142.94	142.07	140.46	159.38	160.92	161.05	162.93	162.56	165.5
70	89.91	89.1	86.66	86.11	84.94	103.69	104.42	105.29	106.41	105.93	109.07
80	36.18	36.24	33.79	33.72	31.7	48.59	50.41	50.74	51.2	52.56	54.1
90	3.68	4.29	5.03	5.04	4.29	6	10.02	6.33	10.71	5.68	11.8

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	2	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Luminous Intensity Data (Continued)

Maximum (cd) : 374
Minimum (cd) : 1

G/C	330	340	350	360
0	371.31	373.15	373.31	372.22
10	366.19	367.38	366.79	369.14
20	346.27	348.23	348.38	349.23
30	314.22	314.93	316.93	319.2
40	271.2	272.88	274.88	277.22
50	221.74	224.41	224.9	227.37
60	166.15	169.73	170.66	174.08
70	110.7	112.49	114.4	117.58
80	55.37	58.83	59.08	62.47
90	6.08	13.09	7.3	17.11

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	2	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04


Luminous Flux Table


Total Lamp Lumens:	1086.0
Luminaire Efficiency (lm/W):	60.23
CIE Classification:	Direct

Elevation	Lumens	Cumulative	Lamp %	Luminaire %
0	8.90	8.90	0.82	0.82
10	69.48	78.39	7.22	7.22
20	129.22	207.60	19.12	19.12
30	171.10	378.70	34.87	34.87
40	189.98	568.68	52.36	52.36
50	184.43	753.11	69.35	69.35
60	156.71	909.81	83.78	83.78
70	112.24	1022.05	94.11	94.11
80	58.33	1080.38	99.48	99.48
90	5.62	1086.00	100.00	100.00

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	2	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

IsoCandela (Type C)

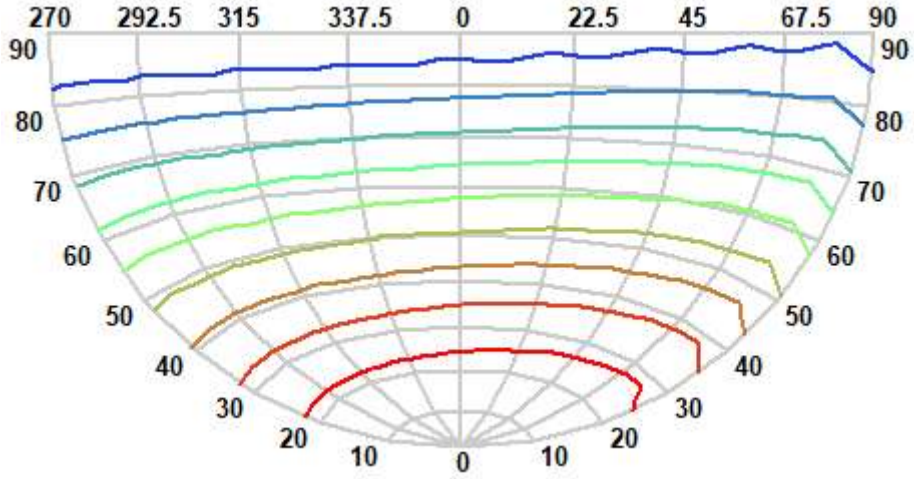


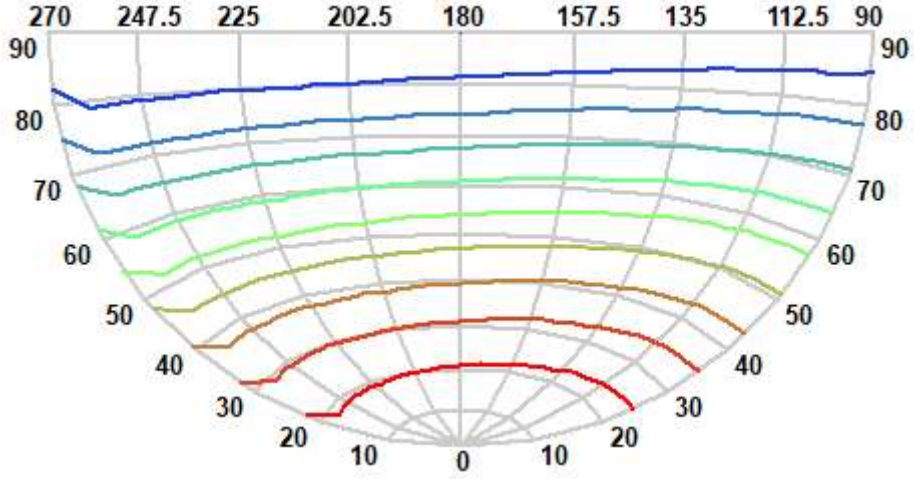



Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	22	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04


IsoLux Diagram (Ground)

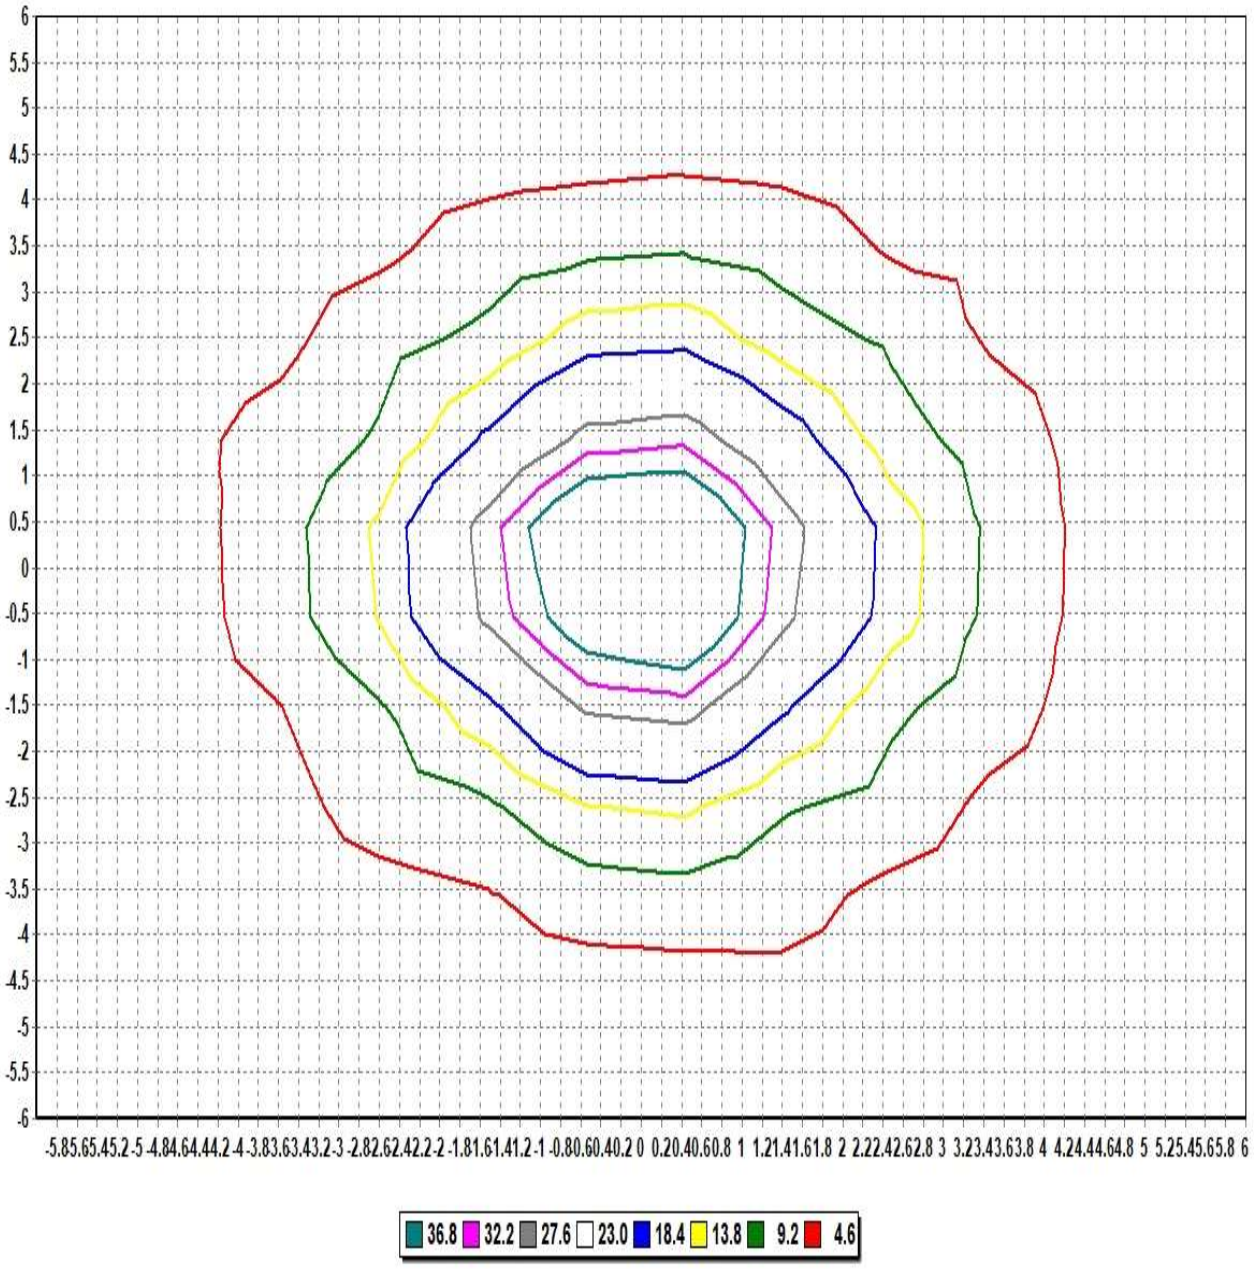

Pole Height (m): 2.7
Area Width (m): 12

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	22	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

IsoLux Diagram (Wall)

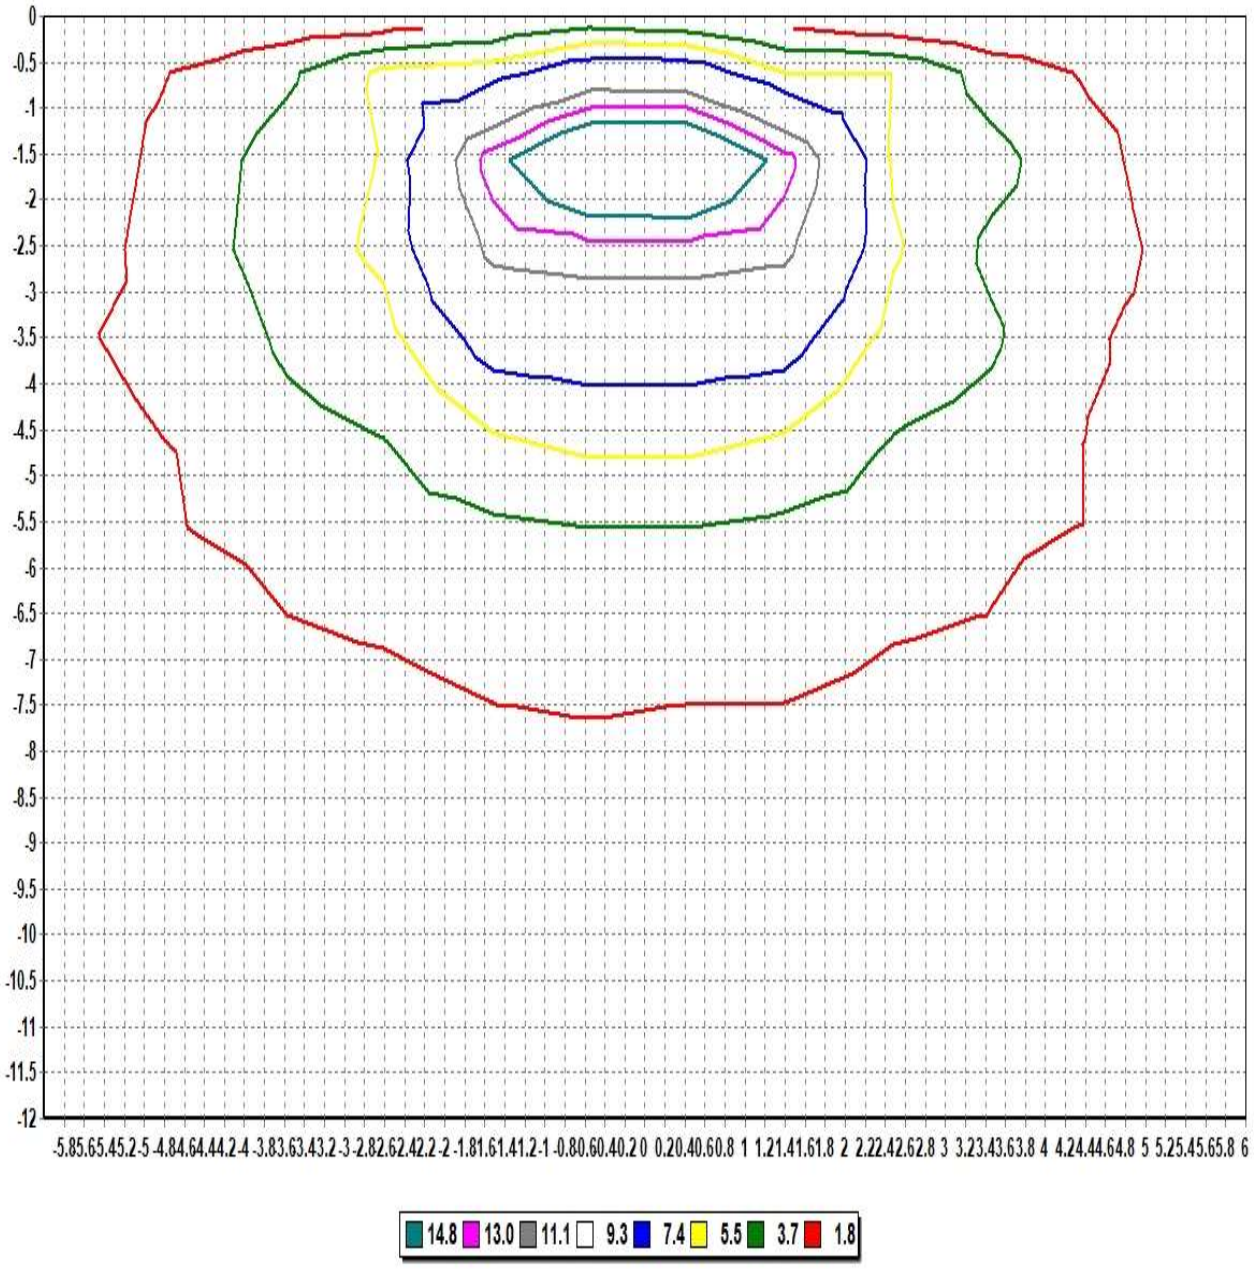

Pole Height (m):	2.7	Wall Distance (m):	2.7
Aiming Plane:	0	Wall Height (m):	12

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	220.54	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.14009	Operator	
Total flux (lm)	1086	Power Factor	0.5836	Date	2026-09-03 오후 2:11:04

Illuminance Levels (Ground)


6.00	0.59	0.78	0.69	0.89	1.10	1.26	1.33	1.43	1.25	1.02	0.80	0.86	0.65
5.00	0.78	0.73	1.03	1.44	2.58	3.05	3.24	3.28	2.79	1.63	1.16	0.82	0.86
4.00	0.65	1.02	2.18	3.15	3.33	4.31	4.71	4.70	3.67	3.39	2.33	1.16	0.75
3.00	0.84	1.36	3.13	3.86	7.67	8.60	9.81	9.21	8.10	4.17	3.37	1.53	0.97
2.00	1.02	2.41	3.21	7.44	10.92	17.34	20.87	18.18	11.50	7.90	3.54	2.62	1.16
1.00	1.14	2.81	3.95	8.21	16.92	30.79	41.64	31.62	17.84	8.85	4.33	3.04	1.30
0.00	1.15	2.93	4.22	8.95	19.54	40.85	51.06	41.68	20.77	9.74	4.70	3.22	1.34
-1.00	1.09	2.76	3.85	7.76	16.08	29.24	41.22	30.43	17.08	8.43	4.24	3.00	1.24
-2.00	0.92	2.32	2.92	7.05	9.96	15.86	19.97	16.87	10.67	7.54	3.26	2.54	1.07
-3.00	0.74	1.22	2.82	3.40	6.92	7.51	9.24	8.20	7.42	3.75	3.09	1.40	0.86
-4.00	0.57	0.85	1.94	2.81	2.84	3.59	4.37	4.01	3.19	3.08	2.12	0.99	0.67
-5.00	0.67	0.60	0.85	1.16	2.21	2.59	3.03	2.86	2.44	1.35	0.98	0.69	0.75
-6.00	0.51	0.67	0.54	0.71	0.86	0.99	1.21	1.16	1.02	0.83	0.64	0.75	0.57
	-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00

Illum. (Max.) : 51.058
Illum. (Min.) : 0.5115
Illum. (Avg.) : 5.9786
All illuminance level values are in lux.



Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	22	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.1	Operator	
Total flux (lm)	1086	Power Factor	0.	Date	2026-09-03 오후 2:11:04

Illuminance Cone Diagram

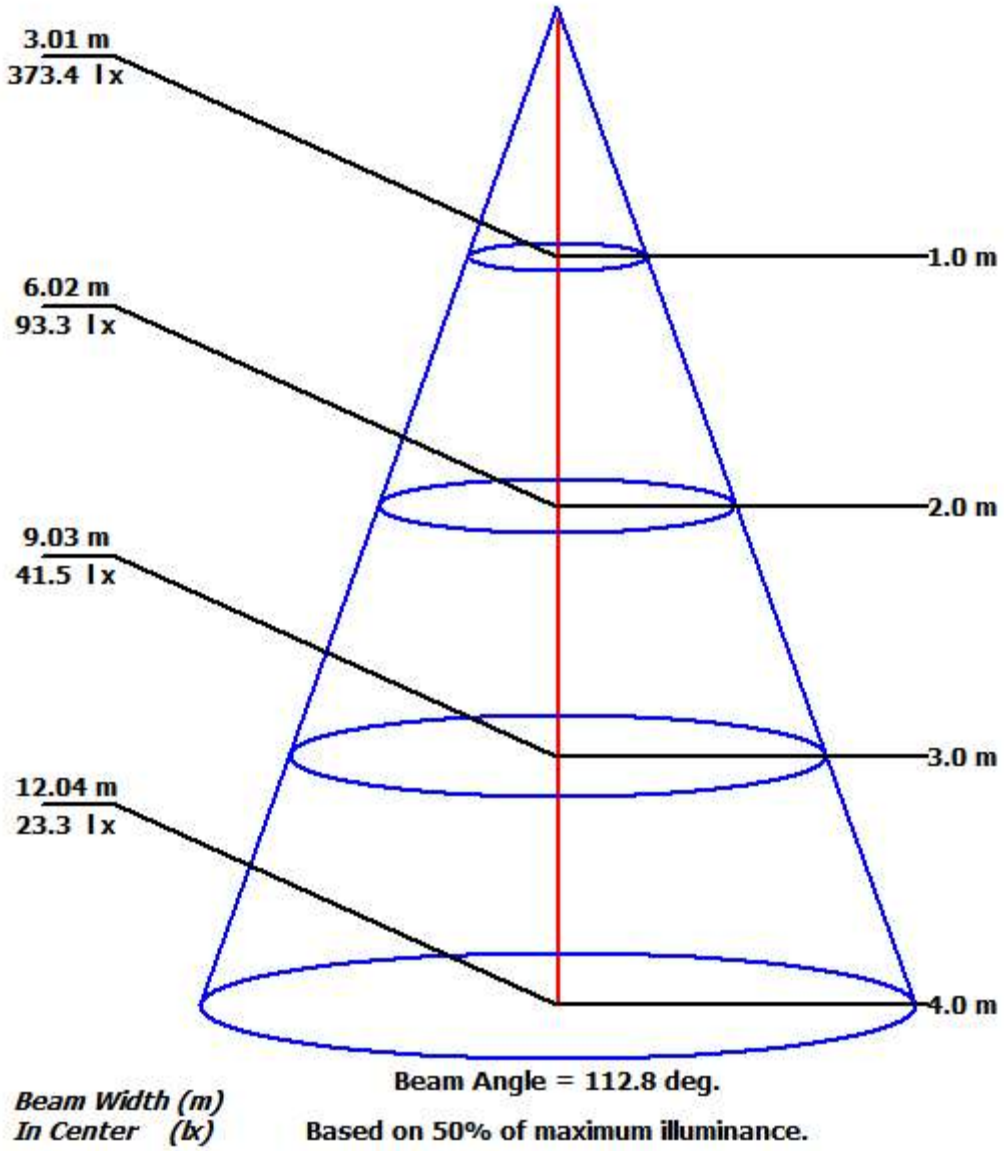

Luminaire	KH FEELUX				
Lamp				Report	KH FEELUX
No. of lamps	1	Voltage (V)	220.54	Filename	260903 FNX3D 35K-24V-C90_lot202608.jdt
Lamp flux (lm)	1086	Current (A)	0.14009	Operator	
Total flux (lm)	1086	Power Factor	0.5836	Date	2026-09-03 오후 2:11:04

Coefficient of Utilization

Refl.	Ceiling (%)	80%	80%	80%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
Refl.	Wall (%)	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
Eff. Floor Cavity Refl.		20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Room CR	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	4	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	7	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	8	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	9	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00