

PRODUCT FEATURES

- Selectable Color Temperature (2700K / 3000K / 4000K / 6000K)
- Linkable together with FLX series
- Virtually no heat emission and no UV radiation
- Available in white, black, Gold, Silver
- With constant voltage DC 24V driver
- Dimmable with available accessories
- Slim puck light

PRODUCT SPECIFICATIONS



Power Input	24VDC Constant Voltage Feelux or Class 2 Drivers
Color Rendering Index	Ra>90
Available CCTs	2700K, 3000K, 4000K, 6000K
Energy Efficiency	84 lm/W (4000K)
Operating Temperature Ranges	0-45°C (32-113°F)
Dimming with Feelux Interface	PWM/0-10V/DALI/PHASE/DMX512/WIRELESS
Material	Aluminum
Beam Angle	25°, 45°, 60°
Lamp Life	50,000hr / 70%
Warranty	3 year
Product is approved for Closet / Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification	

SPECIFICATION


Model Name	Color	Power Input	Lamp Power	Luminous Flux	Luminous Efficacy	Color Rendering Index	CCT	Beam Angle	Operating Temperature
DVS4A 4SW-24V-WT	White Black Silver Gold	DC 24V	4.2 W	310.8 lm	74 lm/w	Ra > 90	2700K	25°, 45°, 60°	0 ~ 45°C
			4.2 W	321.7 lm	76.6 lm/w		3000K		
			4.2 W	352.8 lm	84 lm/w		4000K		
			4.2 W	361.6 lm	86.1 lm/w		6000K		

DIMENSION

* Linkable

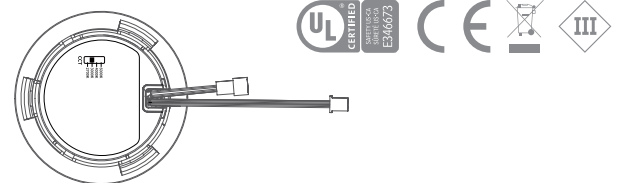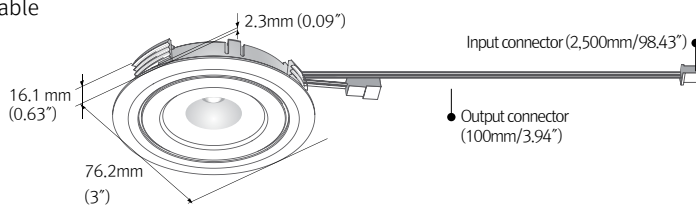

* Surface mount ring

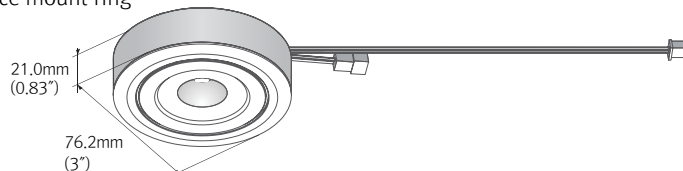

CCT

2700K



3000K




4000K



6000K




CCT Switch




BEAM SPREADS


DVS4A 4SW-24V-WT-25 (27K)




DVS4A 4SW-24V-WT-25 (30K)



DVS4A 4SW-24V-WT-25 (40K)




DVS4A 4SW-24V-WT-25 (60K)




INSTALLATION

FLX Spot DVS & FLX Spot DVS



※ Max. wattage in one lighting row is : 30W (7ea)

Hole Diameter



COMPONENTS




FLX Spot DVS CCT

- __DVS4A 4SW-24V-WT
- __DVS4A 4SW-24V-BK
- __DVS4A 4SW-24V-GD
- __DVS4A 4SW-24V-SV




Extension cable

- __DVSPTC (2,500mm)



Connecting cable

- __NDVDVSPTC (1,000mm)



Connecting cable

- __NDVPC (2,500mm)




Surface mount ring

- __DVS MR-WT
- __DVS MR-BK
- __DVS MR-GD
- __DVS MR-SV




Deco Ring

- __DVS DR-WT
- __DVS DR-BK
- __DVS DR-GD
- __DVS DR-SV



12 Port Hub

__12Way distributor
Included with Cord and Plug drivers.
Order separately for 3rd Party Drivers



LED Drivers

__FLC30-24V/T (30W)
__FLC75-24V/T (75W)
with distributor and powercord (1,800mm)



LED Driver

__FLC200-24V/T (200W)
with 12way distributor



Dimming Interface (0-10V/1-10V)

__FDC-L10 (Max. 100W)



Dimming Interface (0-10V/1-10V)

__FDD-L20



Dimming Interface

__FDA-L2MO
(0-10V/1-10V, DMX512)
Max. 200W (100W/CH, 2CH)
__FDA-L5M (DMX512)
Max. 200W (50W/CH, 5CH)



Dimming Interface (Dail)

__FDD-L1DA
Max. 200W (100W/CH, 1CH)



Dimming Interface (Zigbee)

__FDD-L2Z



Dimming Interface (CASAMBI, Bluetooth)

__FDD-L2B (Max, 200W)



Wireless Control (Zigbee Switch)

__FSM-Z1