


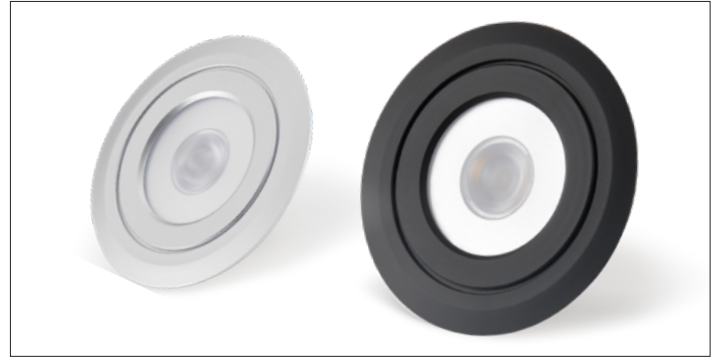

PRODUCT FEATURES

- Linkable together with FLX series
- Virtually no heat emission and no UV radiation
- Available in white, black
- With constant voltage DC 24V driver
- Dimmable with available accessories
- Slim puck light

PRODUCT SPECIFICATIONS


Power Input	24VDC Constant Voltage Feelux or Class 2 Drivers
Color Rendering Index	Ra>90
Available CCTs	2700K, 3000K, 3500K, 4000K, 6000K
Energy Efficiency	LED 100 lm/W, Luminaire 100lm/W
Operating Tempaerature Ranges	0-45°C (32-113°F)
Dimming with Feelux Interface	PWM/0-10V/DALI/PHASE/DMX512/WIRELESS
Material	Aluminum
Beam Angle	25°, 45°, 60°
Lamp Life	50,000hr / 70%
Warranty	3 year
Product is approved for Closet / Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification	

SPECIFICATION


Model Name	Color	Power Input	Lamp Power	Luminous Flux	Luminous Efficacy	Color Rendering Index	CCT	Beam Angle	Operating Temperature
DVS4A 40K-24V-WT-25	White Black Silver Gold	DC 24V	4.5 W	487 lm	108 lm/w	Ra > 90	2700K/3000K/3500K/4000K/5700K	25°	0 ~ 45°C
DVS4A 40K-24V-WT-45		DC 24V	4.6 W	502 lm	109 lm/w	Ra > 90	2700K/3000K/3500K/4000K/5700K	45°	0 ~ 45°C
DVS4A 40K-24V-WT-60		DC 24V	4.6 W	493 lm	107 lm/w	Ra > 90	2700K/3000K/3500K/4000K/5700K	60°	0 ~ 45°C

DIMENSION

* Linkable

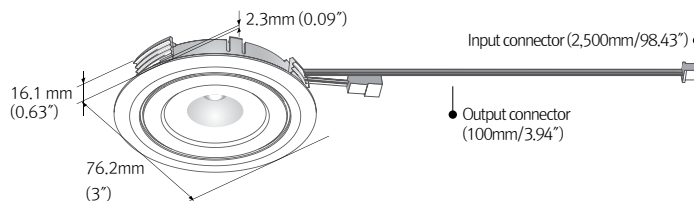


* Surface mount ring

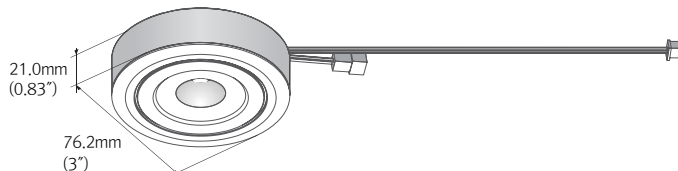


BEAM SPREADS


DVS4A 40K-24V-25

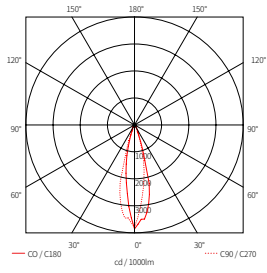

DVS4A 40K-24V-45

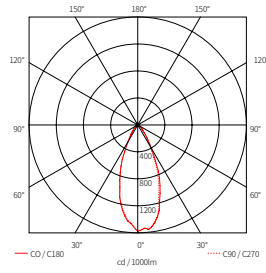


DVS4A 40K-24V-60

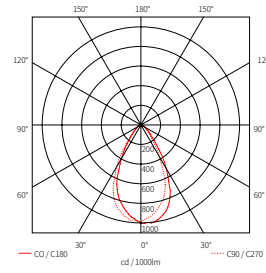


INSTALLATION


FLX Spot DVS & FLX Spot DVS




FLX Spot DVS & FLX Stix NDV / NDP




FLX Stix NDV & FLX Spot DVS





Hole Diameter



Mounting spring installation

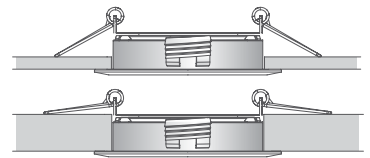

VARIOUS OPTIONS



COMPONENTS




FLX Spot DVS

__DVS4A 40K-24V-WT
__DVS4A 40K-24V-BK
__DVS4A 40K-24V-GD
__DVS4A 40K-24V-SV




Extension cable

__DVSPTC (2,500mm)




Connecting cable

__NDVDVSPTC (1,000mm)




Connecting cable

__NDVPC (2,500mm)



Mounting spring

__DVS spring



Surface mount ring

__DVS MR-WT
__DVS MR-BK
__DVS MR-GD
__DVS MR-SV



Deco Ring

__DVS DR-WT
__DVS DR-BK
__DVS DR-GD
__DVS DR-SV



LED Drivers

__FLC30-24V/T (30W)
__FLC75-24V/T (75W)
with distributor and power
cord (1,800mm)



LED Driver

__FLC200-24V/T (200W)
with 12way distributor



Dimming Interface

__FDC-L10
(0-10V)
Max. 100W (100W/CH, 1CH)



Dimming Interface

__FDA-L2MO
(0-10V/1-10V, DMX512)
Max. 200W (100W/CH, 2CH)
__FDA-L5M (DMX512)
Max. 200W (50W/CH, 5CH)




Dimming Interface

__FDD-L1DA
(Dail)
Max. 200W (100W/CH, 1CH)



Door and motion sensor

__FLS-M24V



Occupancy sensor

__FLS-P24V