


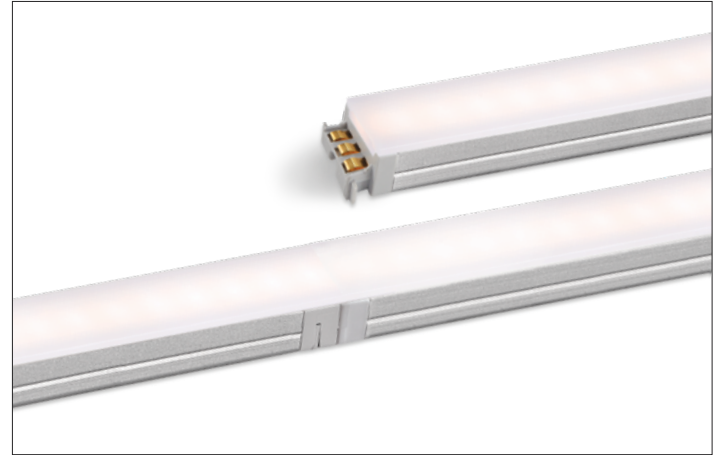

PRODUCT FEATURES

- Super Slim linear LED with white color changing output
- Seamless Spot Free Illumination
- Ultra Slim Profile
- Close Pitch LEDs
- Perfected Color Consistency
- Even Surface Illumination
- Multiple Lengths for Easy Configuration
- End to End Snap-In Connection
- Dimmable
- Side-Feed Units for Long Continuous Runs


PRODUCT SPECIFICATIONS

- 24V DC Constant Voltage Feelux or Approved Class 2 Drivers
- Operating Temperature : 0-45°C
- Lamp Life : 50,000 hrs L70
- Available Color : 2,200K ~ 4,000K
- CRI/Ra > 90
- 66lm/W - 6.2W/ft - 409lm/ft (DDPro 24W SC)
- IP20 - Damp Location/Closet Approved
- Beam Angle : 120°
- Finish : Aluminum
- 3 year warranty
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification


DIMENSIONS




Model Number	Voltage Input (V)	Power Input (W)	A mm (inches)	B mm (inches)	C mm (inches)
DDP3 SC-24V-C90	DC 24	2.9	140 (5.5")	145 (5.7")	162 (6.4")
DDP6 SC-24V-C90	DC 24	5.8	280 (11")	285 (11.2")	303 (11.9")
DDP12 SC-24V-C90	DC 24	11.5	559 (22")	564 (22.2")	582 (22.9")
DDP18 SC-24V-C90	DC 24	17.5	838 (32.9")	843 (33.1")	862 (33.9")
DDP24 SC-24V-C90	DC 24	22.8	1117 (43.9")	1122 (44.1")	1141 (44.9")

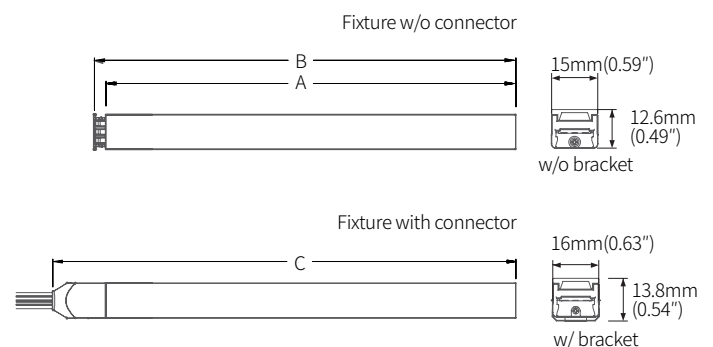


EASY CONNECTION

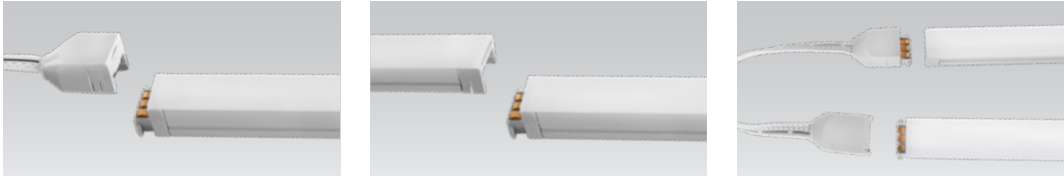


OPTIONS

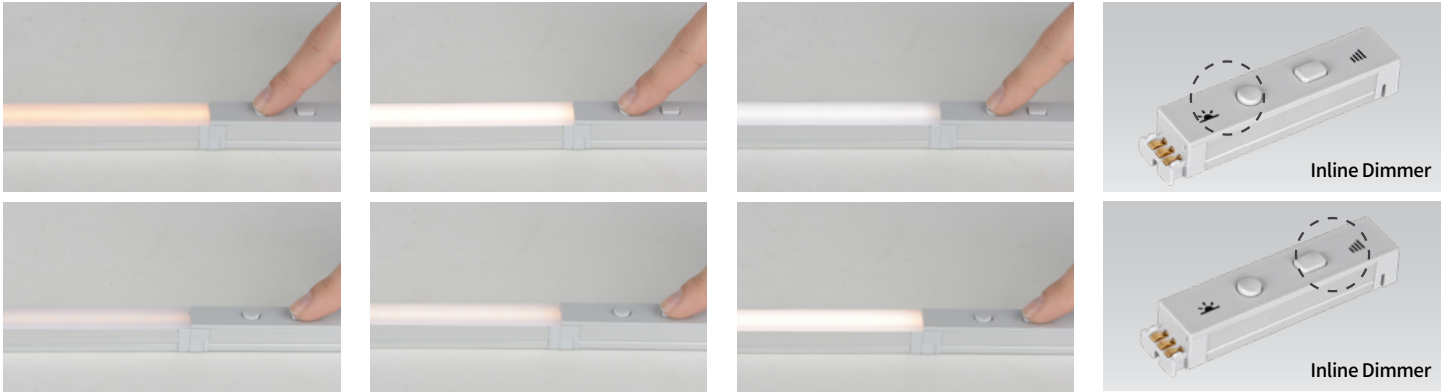

INSTALLATION

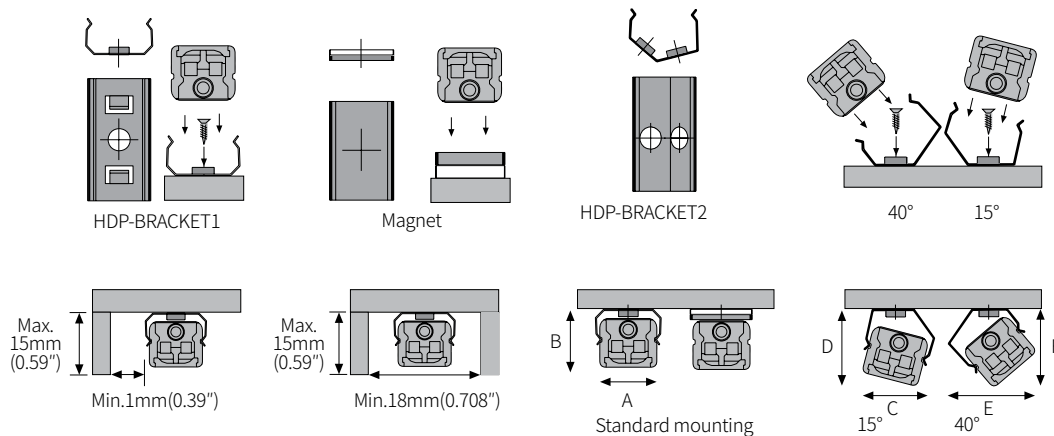


INLINE DIMMER

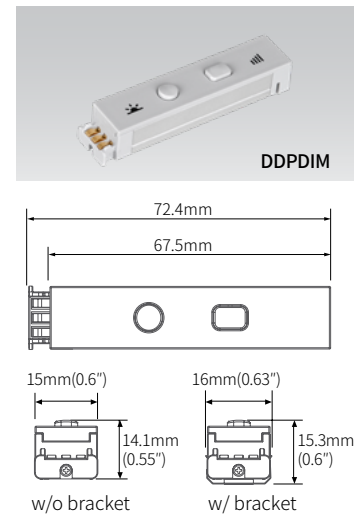


LED DRIVER OPTIONS

Consult factory for additional options.

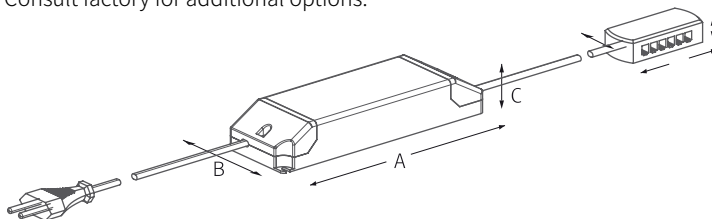

Model Number	A mm (inches)	B mm (inches)	C mm (inches)
FLC30-24V/T	150 (5.9'')	41 (1.6'')	31 (1.22'')
FLC75-24V/T	180 (7.08'')	60 (2.36'')	32 (1.25'')

BEAM SPREADS

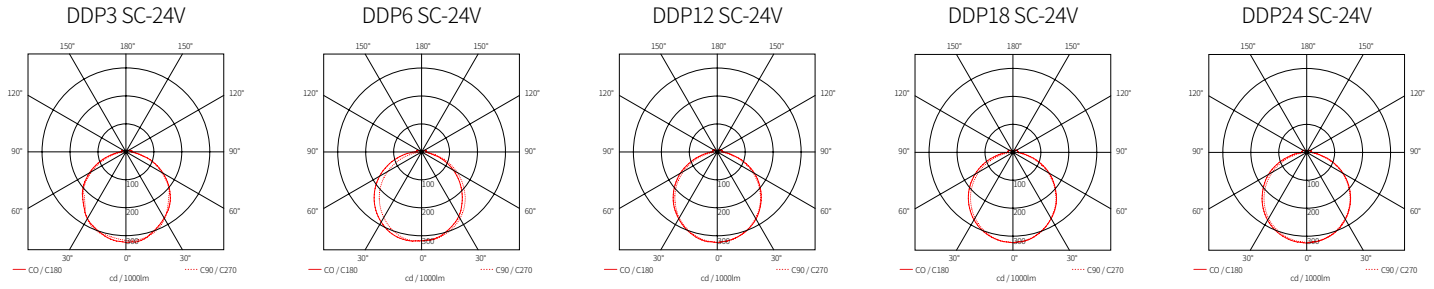

COMPONENTS




Power cable

- __HDPPTC (2,500mm)
- __HDPPTC (4,000mm)



Connecting Cable

- __NDPPTC1 (150mm)
- __NDPPTC1 (300mm)
- __NDPPTC2 (600mm)
- __NDPPTC4 (1,200mm)
- __NDPPTC6 (1,800mm)



Mounting Brackets

- __HDP-BRACKET1
- Included with fixture




Angled Brackets

- __HDP-BRACKET2
- Angled 15°/40°(BK2)
- Optional



Sidefeed for Seamless Extension (3W)

- __DDP3-(color)K-24V-S



End Cap

- __HDP-CAP
- Included with fixture



In-Line Dimmer

- __DDPDIM
- (Max 75W in a row)



LED Drivers

- __FLC30-24V/T (30W)
- __FLC75-24V/T (75W)
- with distributor and power cord (1,800mm)



LED Driver

- __FLC200-24V/T (200W)
- with 12way distributor



Dimming Interface

- __FDA-L2MO
- (0-10V/1-10V, DMX512)
- Max. 200W (100W/CH, 2CH)
- __FDA-L5M (DMX512)
- Max. 200W (50W/CH, 5CH)



Dimming Interface (Dail)

- __FDD-L1DA
- Max. 200W (100W/CH, 1CH)



Control Interface

- __FDD-L20
- Max. 200W (100W/CH, 2CH)