



PRODUCT FEATURES

- Seamless Illumination. No Dark Spots
- Ultra Slim Profile
- Even Surface Illumination
- Spot Free Lens
- Multiple Lengths for Easy Configuration
- End to End Snap-In Connection
- Dimmable
- Side-Feed Units for Long Continuous Runs

PRODUCT SPECIFICATIONS

- 24VDC Constant Voltage Feelux or Approved Class 2 Drivers
- Operating Temperature : 0-45°C
- Lamp Life : 50,000 hrs / 70%
- Available Color : 2700K, 3000K, 3500K, 4000K
- CRI/Ra > 90
- 74 lm/W – 6.2W/ft – 456lm/ft (HDPPro 24W 4000K)
- IP20 – Damp Location/Closet Approved
- Beam Angle : 120°
- Finish : Aluminum
- 3 year Warranty
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification

DIMENSIONS



FLX Stix HDPPro 3W 145mm




FLX Stix HDPPro 6W 285mm



FLX Stix HDPPro 12W 565mm




FLX Stix HDPPro 18W 845mm






FLX Stix HDPPro 24W 1123mm




Model Number	Voltage Input (V)	Power Input (W)	Luminous Flux (lm) / 4000K	Color Rendering	A (mm)	B (mm)	C (mm)
HDP3-(Color)K-24V -C90	DC24	2.9	205	Ra>90	140	145	163
HDP6-(Color)K-24V -C90	DC24	5.7	408	Ra>90	280	285	303
HDP12-(Color)K-24V -C90	DC24	11.5	832	Ra>90	559	565	582
HDP18-(Color)K-24V -C90	DC24	17.3	1,259	Ra>90	838	844	861
HDP24-(Color)K-24V -C90	DC24	22.8	1,677	Ra>90	1,118	1,123	1,141

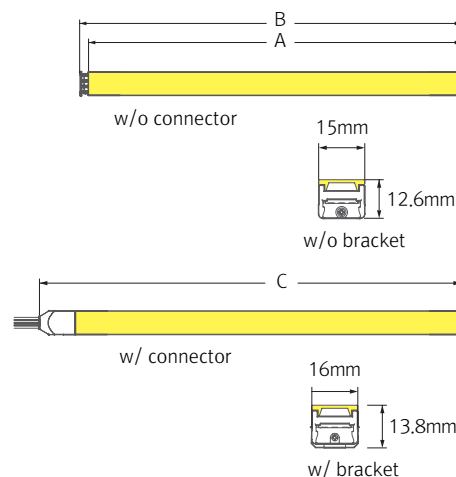


EASY CONECTION






MAGNET

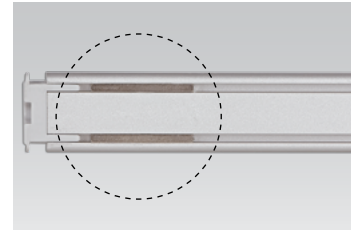


FLEXIBLE CONNECTING FIXTURE




INLINE DIMMER

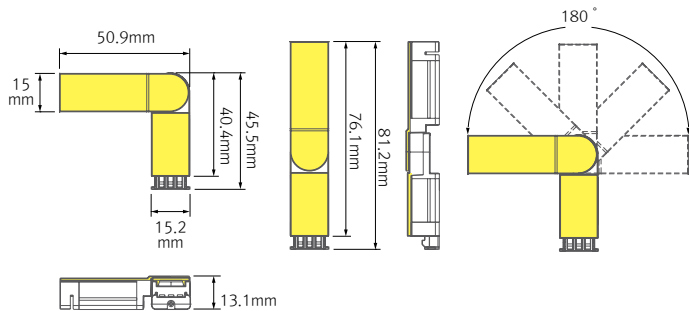




MOUNTING





HDV-BRACKET1




Magnet




HDV-BRACKET2



Standard mounting



LED DRIVER OPTIONS

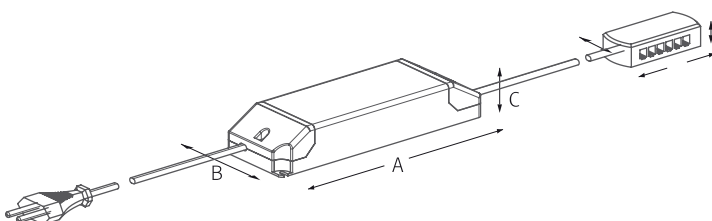


Model Name	A (mm)	B (mm)	C (mm)
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32


CONNECTION

NO RUN TO EXCEED 55W

IF LONGER RUNS ARE REQUIRED USE SIDE FEED UNIT HDP3-(COLOR)K-24V-S TO CONTINUE SEAMLESS LIGHTING. NOT TO EXCEED 90% OF DRIVER RATED WATTAGE.

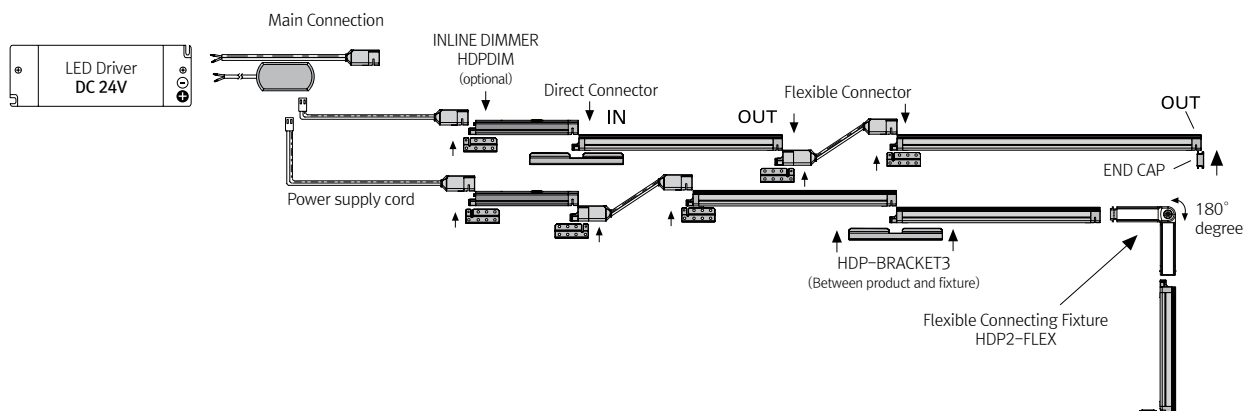


SIDE FEED UNIT

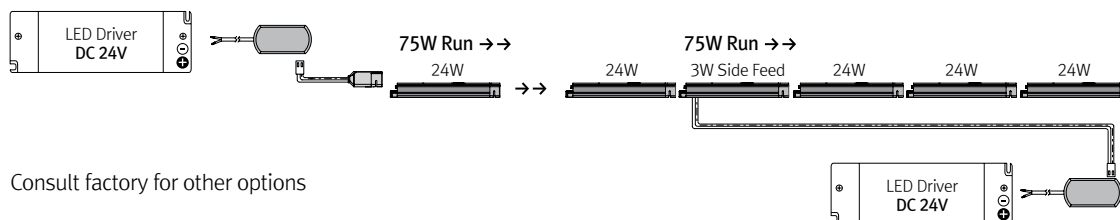


Consult factory for other options

BEAM SPREADS


HDPPro 3W 4000K




HDPPro 6W 4000K




HDPPro 12W 4000K




HDPPro 18W 4000K



HDPPro 24W 4000K



COMPONENTS



Power cable

- __ HDP-PC (2,500mm)
- __ HDP-PC (4,000mm)




Sidefeed for Seamless Extension (3W)

- __ HDP3-(color)K-24V-S



Flexible Connecting Fixture (2W)

- __ HDP2-(color)K-24V-Flex



Flexible Connecting Cable

- __ HDP-PTC (150mm)
- __ HDP-PTC1 (300mm)
- __ HDP-PTC2 (600mm)
- __ HDP-PTC4 (1,200mm)
- __ HDP-PTC6 (1,800mm)



In-Line Dimmer

- __ HDP-DIM
- (Max 75W in a row)




Occupancy Sensor

- __ HDP-OSM
- HDP Occupancy Sensor
- Inline Module




Touch Switch

- __ HDP-TS
- HDP ON/OFF touch switch



End Cap

- __ HDP-CAP
- Included with fixture



Metal Mounting Brackets

- __ HDP-BRACKET1
- Included with fixture



Angled Brackets

- Angled 15°/40° (BK2)
- __ HDP-BRACKET2
- Optional




Connecting Brackets

- Fixture to Fixture
- __ HDP-BRACKET3
- Included with fixture



12 Port Hub

- __ 12 Way distributor
- Included with Cord and Plug drivers. Order separately for 3rd Party Drivers



LED Drivers

- __ FLC30-24V/T (30W)
- __ FLC75-24V/T (75W)
- with distributor and power cord (1,800mm)



LED Driver

- __ FLC200-24V/T (200W)
- with 12way distributor



Dimming Interface (0-10V/1-10V)

- __ FDC-L10 (Max. 100W)



Dimming Interface

- __ FDA-L2MO
- (0-10V/1-10V, DMX512)
- Max. 200W (100W/CH, 2CH)
- __ FDA-L5M (DMX512)
- Max. 200W (50W/CH, 5CH)




Dimming Interface (Dail)

- __ FDD-L1DA
- Max. 200W (100W/CH, 1CH)



Door and motion sensor

- __ FLS-M24V



Occupancy sensor

- __ FLS-P24V