

PRODUCT FEATURES


- Selectable two Color Temperature
- Seamless Spot Free Illumination
- Ultra Slim Profile
- Close Pitch LEDs
- Perfected Color Consistency
- Even Surface Illumination
- Multiple Lengths for Easy Configuration
- End to End Snap-In Connection
- Dimmable
- high efficiency

PRODUCT SPECIFICATIONS

Power Input	24VDC Constant Voltage Feelux or Class 2 Drivers
Color Rendering Index	Ra>90
Available CCTs	Select CCT1 & CCT2 from 2700K, 3000K, 4000K, 5700K, 6500K
Operating Temperature Ranges	0-45°C (32-113°F)
Material	Aluminum
Beam Angle	120°
Lamp Life	50,000hr / 70%
Warranty	3 year
	IP20 - Damp Location Product is approved for Closet / Storage space installation per. NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification

DIMENSIONS

Model Number	Voltage Input (V)	Power Input (W)	Luminous Flux (lm)		Color Rendering	A (mm)	B (mm)	C (mm)
			3000K	4000K				
NDP1 2SW-24V-C90	DC 24V	1.2	99.3	115.3	Ra>90	95	100	117
NDP3 2SW-24V-C90		2.42	222.6	230.3		188	193	210
NDP4 2SW-24V-C90		3.62	319.7	326.4		279	284	301
NDP7 2SW-24V-C90		7.17	648.8	684.5		560	565	582
NDP11 2SW-24V-C90		10.62	856.8	987.6		838	843	860
NDP15 2SW-24V-C90		14.42	1,189.2	1,238.2		1,117	1,122	1,139

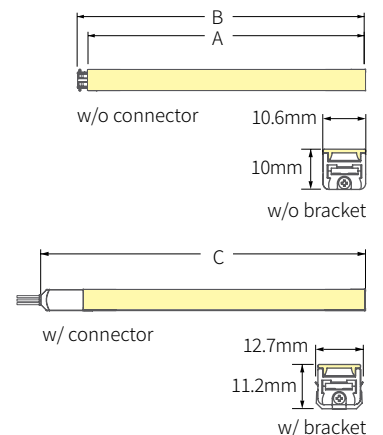

CCT

CCT designations

	27K	30K	40K	50K	57K	65K
CCT1		○				
CCT2			○			


CCT 1



CCT 2





CCT Switch

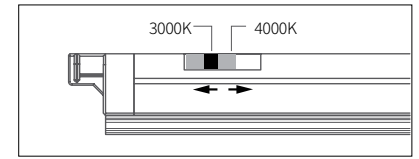


* Standard: 3000K / 4000K · Other CCT options available on request


INLINE DIMMER

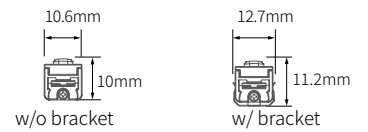


EASY CONNECTION

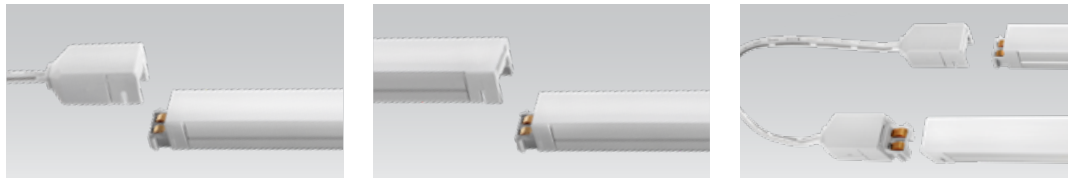









MAGNET

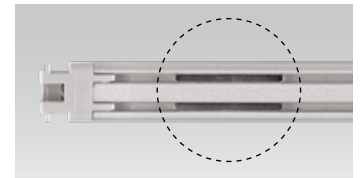




OPTIONS

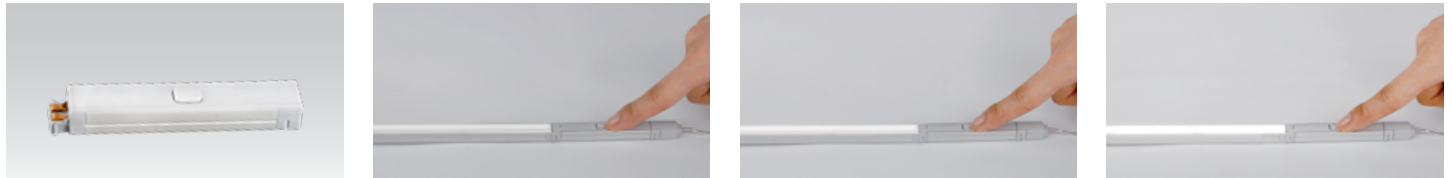


INSTALLATION



A	B	C	D	E	F
12mm	11mm	13.1mm	14.3mm	16mm	14.6mm

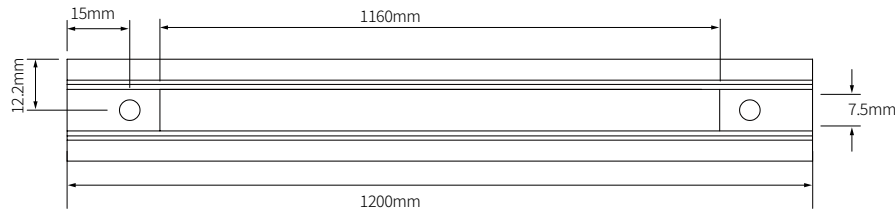

LED DRIVER OPTIONS

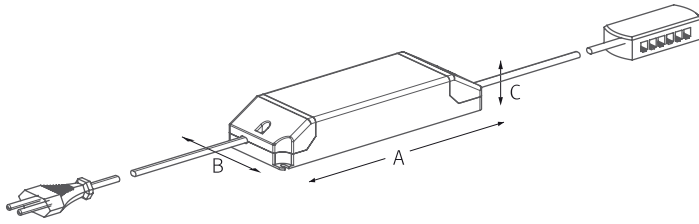


Model Name	A mm	B mm	C mm
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32


CONNECTION

NO RUN TO EXCEED 55W


IF LONGER RUNS ARE REQUIRED USE SIDE FEED UNIT NDP3-(COLOR)K-24V-S TO CONTINUE SEAMLESS LIGHTING.
NOT TO EXCEED 90% OF DRIVER RATED WATTAGE.

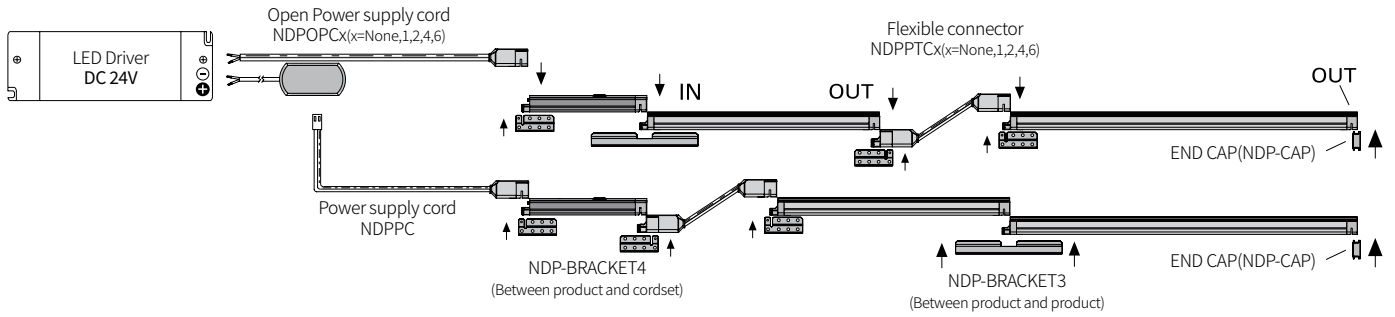


BEAM SPREADS

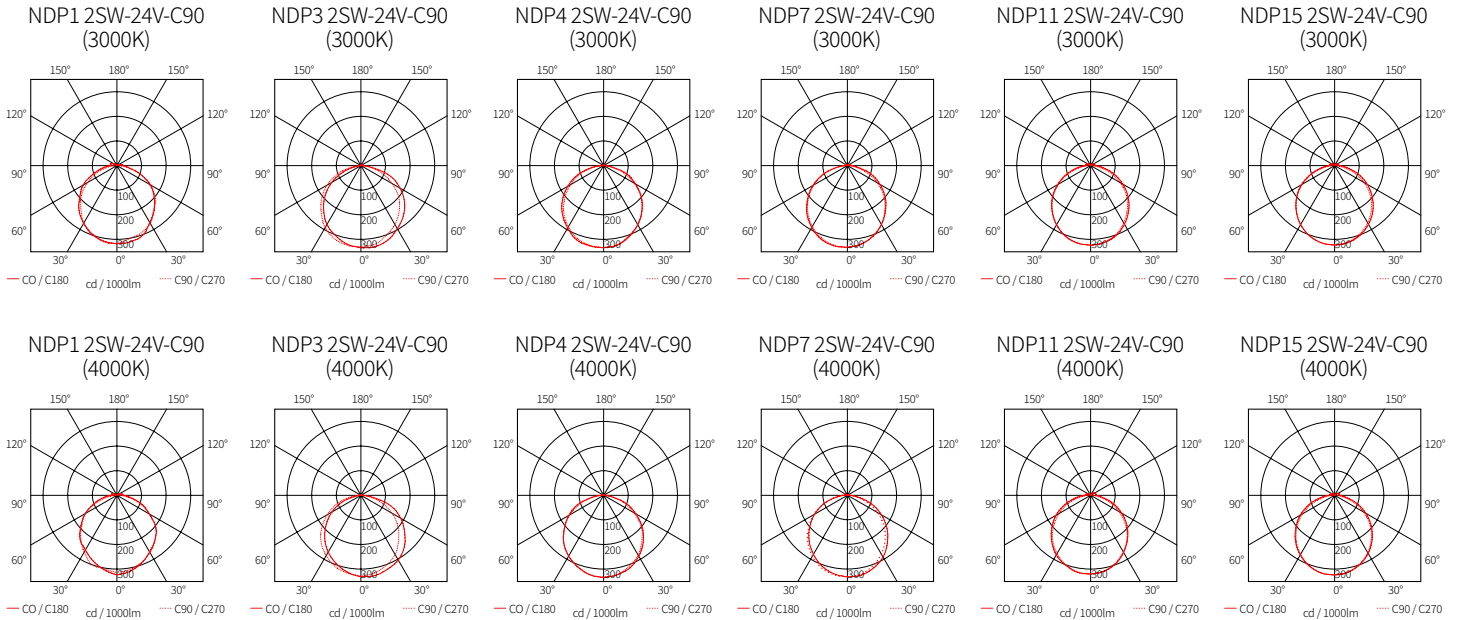


COMPONENTS




Power Cable
 __NDPPC (2,500mm)
 __NDPPC (4,000mm)
 __NDPPC (6,000mm)



Metal Mounting Brackets
 __NDV-BRACKET1
 Included with fixture



12 Port Hub
 __12Way distributor
 Included with Cord and Plug drivers.
 Order separately for 3rd Party Drivers



Connecting Cable
 __NDPPTC (150mm)
 __NDPPTC1 (300mm)
 __NDPPTC2 (600mm)
 __NDPPTC4 (1,200mm)
 __NDPPTC6 (1,800mm)



Angled Brackets
 __NDV-BRACKET2
 Angled 15°/40° (BK2)
 Optional



LED Drivers
 __FLC30-24V/T (30W)
 __FLC75-24V/T (75W)
 with distributor and powercord (1,800mm)



In-Line Dimmer
 __NDPDIM
 (Max 55W in a row)



Connecting Brackets
 __NDV-BRACKET3
 Fixture to Fixture
 Included with fixture



LED Driver
 __FLC200-24V/T (200W)
 with 12way distributor




Occupancy Sensor
 __NDP-OSM
 NDP Occupancy Sensor
 Inline Module



Power Brackets
 __NDV-BRACKET4
 Included with NDPPC
 and NDPPTC



Dimming Interface (0-10V/1-10V)
 __FDC-L10 (Max. 100W)




Touch Switch
 __NDPTS
 NDP ON/OFF touch switch




Magnet Brackets
 __NDP-BRACKET-M



Dimming Interface (0-10V/1-10V)
 __FDD-L20



End Cap
 __NDP-CAP
 Included with fixture



NDP Recessed Extrusion
 __NDP-EXR-SV (1,200mm)
 __NDP-EXR-BK (1,200mm)



Dimming Interface
 __FDA-L2MO
 (0-10V/1-10V, DMX512)
 Max. 200W (100W/CH, 2CH)
 __FDA-L5M (DMX512)
 Max. 200W (50W/CH, 5CH)



Dimming Interface (Dail)
 __FDD-L1DA
 Max. 200W (100W/CH, 1CH)



Dimming Interface (Zigbee)
 __FDD-L2Z



Dimming Interface (CASAMBI, Bluetooth)
 __FDD-L2B(Max, 200W)



Wireless Control (Zigbee Switch)
 __FSM-Z1