



PRODUCT FEATURES

- Seamless Spot Free Illumination
- Ultra Slim Profile
- Close Pitch LEDs
- Perfected Color Consistency
- Even Surface Illumination
- Multiple Lengths for Easy Configuration
- End to End Snap-In Connection
- Dimmable
- Side-Feed Units for Long Continuous Runs

PRODUCT SPECIFICATIONS

- 24V DC Constant Voltage Feelux or Approved Class 2 Drivers
- Operating Temperature : 0-45°C
- Lamp Life : 50,000 hrs L70
- Available Color : 2700K, 3000K, 3500K, 4000K
- CRI/Ra > 90
- 83.5lm/W - 3.9W/ft - 327lm/ft (NDPro 15W 4000K)
- IP20 - Damp Location/Closet Approved
- Beam Angle : 120°
- Finish : Aluminum
- 3 year warranty
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification

DIMENSIONS

FLX Stix NDP .5W 38mm

FLX Stix NDP 1W 100mm

FLX Stix NDP 3W 193mm

FLX Stix NDP 4W 284mm


FLX Stix NDP 7W 565mm

FLX Stix NDP 11W 843mm

FFLX Stix NDP 15W 1,122mm




Model Number	Voltage Input (V)	Power Input (W)	Luminous Flux (lm) / 4000K	Color Rendering	A (mm)	B (mm)	C (mm)
NDP1-(Color)K-24V-C90-L38	DC24	0.49	41.9	a>90	33	38	55
NDP1-(Color)K-24V-C90	DC24	1.2	93.6	Ra>90	95	100	117
NDP3-(Color)K-24V-C90	DC24	2.37	186.9	Ra>90	188	193	210
NDP4-(Color)K-24V-C90	DC24	3.59	290.3	Ra>90	279	284	301
NDP7-(Color)K-24V-C90	DC24	7.17	568.4	Ra>90	560	565	582
NDP11-(Color)K-24V-C90	DC24	10.62	857.5	Ra>90	838	843	860
NDP15-(Color)K-24V-C90	DC24	14.42	1,203	Ra>90	1,117	1,122	1,139

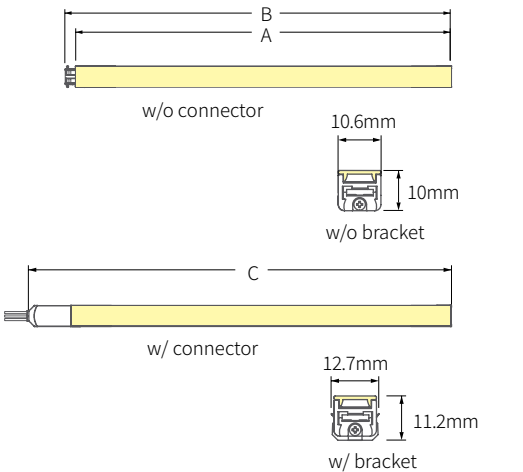


DIMENSIONS


*Corner In Connector




*Corner Out Connector




*Shortest Fixture (38mm)




*Shortest Fixture(38mm) with Power Cable







*Flexible Connector

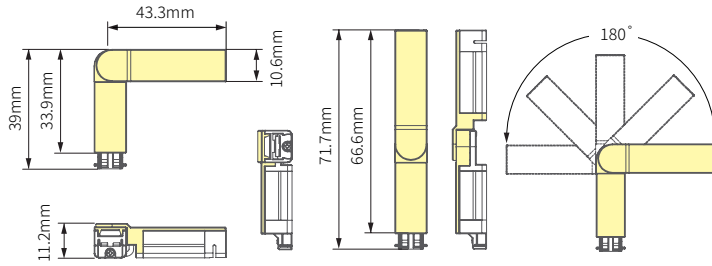

INLINE DIMMER

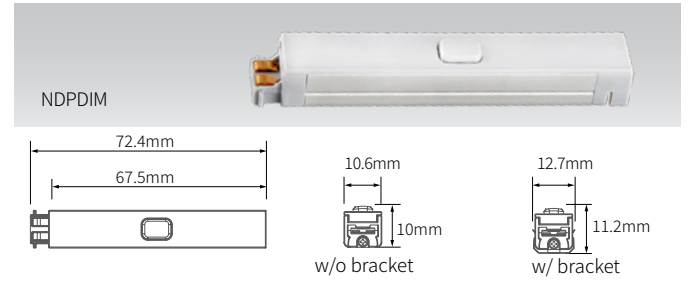





EASY CONNECTION

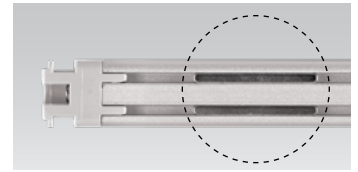




OPTIONS




INSTALLATION

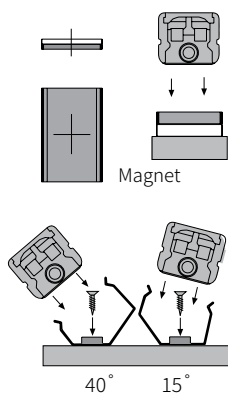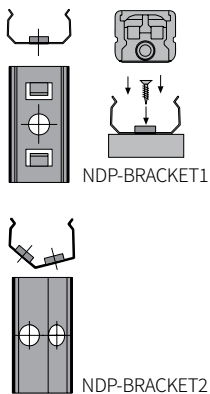

A	B	C	D	E	F
12mm	11mm	13.1mm	14.3mm	16mm	14.6mm

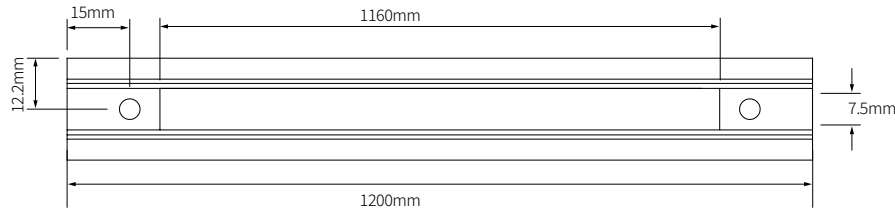

LED DRIVER OPTIONS

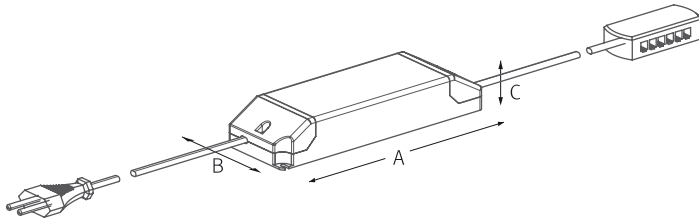


Model Name	A mm	B mm	C mm
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32


CONNECTION

NO RUN TO EXCEED 55W

IF LONGER RUNS ARE REQUIRED USE SIDE FEED UNIT NDP3-(COLOR)K-24V-S TO CONTINUE SEAMLESS LIGHTING.
NOT TO EXCEED 90% OF DRIVER RATED WATTAGE.

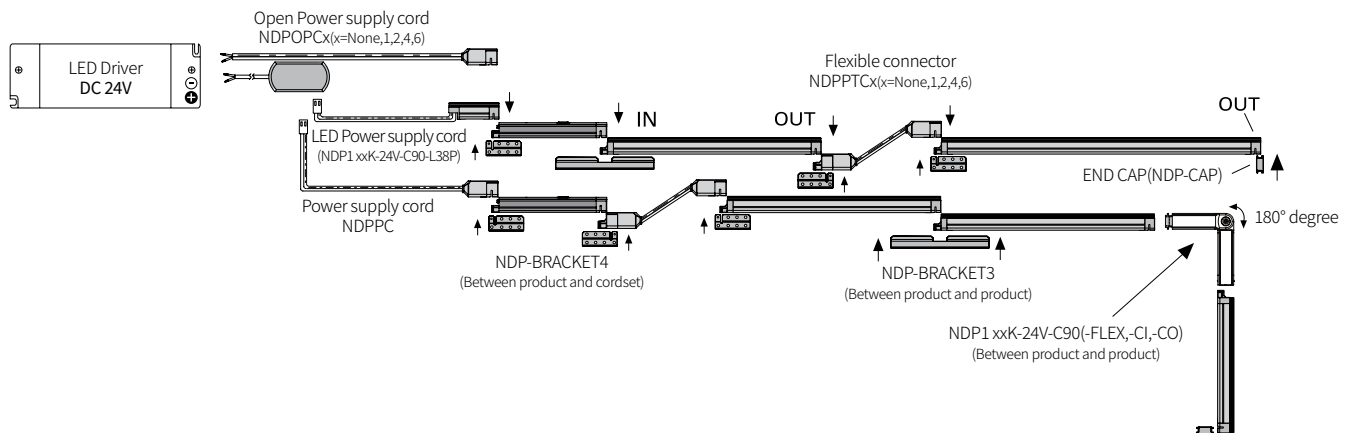







SIDE FEED UNIT

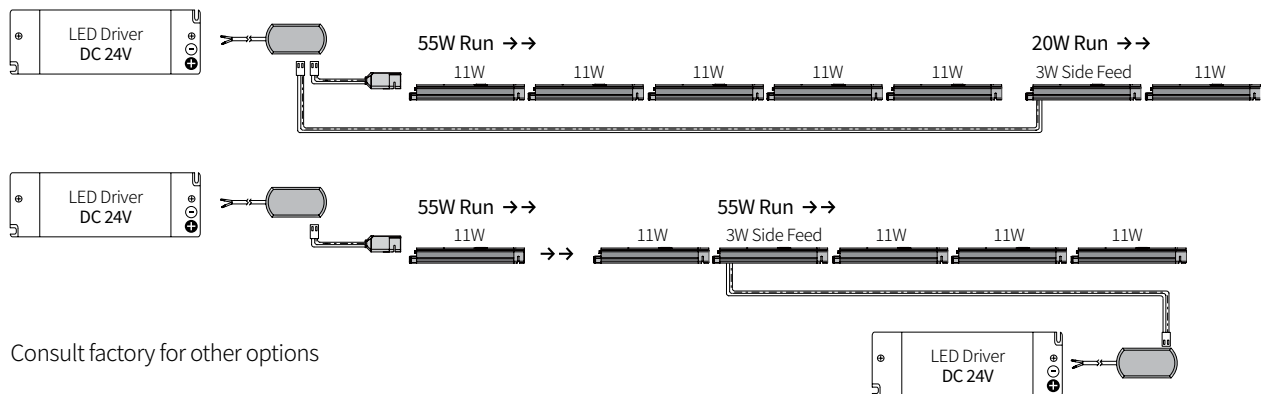


Consult factory for other options

CAN POWER UP TO 55 WATT MAX FIXTURE LOAD. CONNECTED LINE OF LIGHT REQUIRES SIDE FEED EVERY 15FT(55WATT). TOTAL CONNECTED LOAD SHOULD NOT EXCEED 90% OF DRIVER WATTS


BEAM SPREADS



COMPONENTS



__NDPPC (2,500mm)
__NDPPC (4,000mm)
__NDPPC (6,000mm)



Connecting Cable
__NDPPTC (150mm)
__NDPPTC1 (300mm)
__NDPPTC2 (600mm)
__NDPPTC4 (1,200mm)
__NDPPTC6 (1,800mm)




LED Power cable
__NDP1-(color)K 24V-C90-L38P
2,500mm cable
Lighted section 36mm



Sidefeed for Seamless Extension (3W)
__NDP3-(color)K-24V-S



Flexible Connector
__NDP1-(color)K-24V-FLEX




Corner Out Connector
__NDP1-(color)K-24V-C90-CO




Corner In Connector
__NDP1-(color)K-24V-C90-CI




In-Line Dimmer
__NDPDIM
(Max 55W in a row)




Occupancy Sensor
__NDP-OSM
NDP Occupancy Sensor
Inline Module



Touch Switch
__NDPTS
NDP ON/OFF touch switch



End Cap
__NDP-CAP
Included with fixture



Metal Mounting Brackets
__NDV-BRACKET1
Included with fixture



Angled Brackets
__NDV-BRACKET2
Angled 15°/40° (BK2)
Optional




Connecting Brackets
__NDV-BRACKET3
Fixture to Fixture
Included with fixture



Power Brackets
__NDV-BRACKET4
Included with NDPPC
and NDPPTC



Magnet Brackets
__NDP-BRACKET-M



NDP Recessed Extrusion
__NDP-EXR-SV (1,200mm)
__NDP-EXR-BK (1,200mm)



12 Port Hub
__12 Way distributor
Included with Cord and Plug
drivers. Order separately for
3rd Party Drivers



LED Drivers
__FLC30-24V/T (30W)
__FLC75-24V/T (75W)
with distributor and power
cord (1,800mm)



LED Driver
__FLC200-24V/T (200W)
with 12way distributor



Dimming Interface (0-10V/1-10V)
__FDC-L10 (Max. 100W)



Dimming Interface
__FDA-L2MO
(0-10V/1-10V, DMX512)
Max. 200W (100W/CH, 2CH)
__FDA-L5M (DMX512)
Max. 200W (50W/CH, 5CH)



Dimming Interface (Dail)
__FDD-L1DA
Max. 200W (100W/CH, 1CH)



Door and motion sensor
__FLS-M24V



Occupancy sensor
__FLS-P24V