

# FEELED DIVA

LED for cabinet




## FEELED DIVA

Slim profile permits installation at limited space.



## Various angles

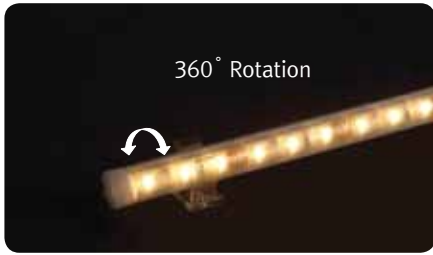

## Product Features

- Acrylic diffuser gives off a soft glow
- Transparent, Milky Diffuser
- Dark spot free at the linking point
- Eco friendly product


## Max. connection

- DIVA 24V : 55W in a row

## Specification

- Voltage : DC 24V
- Operating temperature : 0~45°C
- Lamp life : 40,000hr
- Energy efficiency : 75 lm/W
- Available color : 27000K, 3000K, 3500K, 4000K, 6000K
- Color rendering : Ra>80

## Dimension

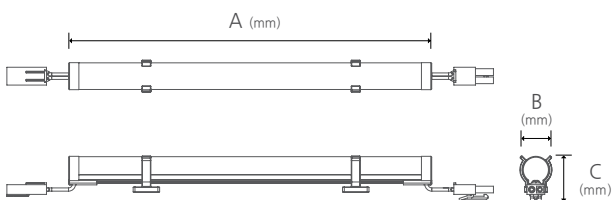

| Model Name   | Power Input (V) | Lamp Power (W) | A (mm) | B (mm) | C (mm) |
|--------------|-----------------|----------------|--------|--------|--------|
| DV4A4B24C/T  | DC 24           | 3.5            | 310    | 17.7   | 20     |
| DV7A4B24C/T  | DC 24           | 7              | 610    | 17.7   | 20     |
| DV11A4B24C/T | DC 24           | 10.5           | 910    | 17.7   | 20     |

## Accessories

### Ⓐ Connecting cables

| DVPTC        | DVPTC 1      | DVPTC 2      | DVPTC 4       | DVPTC 6       |
|--------------|--------------|--------------|---------------|---------------|
| 150mm(6inch) | 300mm(1feet) | 600mm(2feet) | 1200mm(4feet) | 1800mm(6feet) |

### Ⓑ Power cable :DVPC

Power cable 2500mm Between DIVA & 6-way distributor

### Ⓒ Mounting bracket : DV-Bracket

### Ⓓ LED Converter With 6way distributor, With power cord(1800mm)

| Part No  | FLC15-24V/T | FLC30-24V/T | FLC75-24V/ T |
|----------|-------------|-------------|--------------|
| Capacity | 15W 24V     | 30W 24V     | 75W 24V      |

### Ⓔ Sensor

| Motion detection sensor | Motion detection sensor (Door) |
|-------------------------|--------------------------------|
| FLS-M                   | FLS-D                          |

