




Dimensions

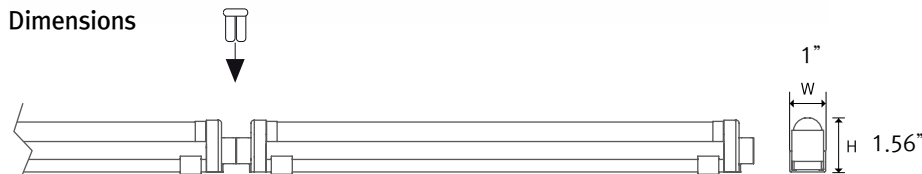

Mounting

MDSL
MDSL-BRACKET 180°
MDSL-BRACKET 90° *



Product Features

- High efficiency built-in programmed start ballast
- End of Lamp Life (EOL) protection
- Low profile rigid extruded aluminum body
- Quick connection system
- Daisy chain up to 10 fixtures together

Specification

- Frequency range: 60Hz
- Voltage: 120V
- Power factor: >97%
- Color Rendering Index (CRI) = Ra > 80
- Lamp life : 20,000hr
- Tube diameter: 16mm(T5)
- Class of protection: I
- Degree of protection: IP20
- Operating Temperature: 0-45 °C
32-113 °F

Warranty

3 year warranty

Certifications



Beam Angle

240°

Shipment

DimSlimLamps (fixture,lamp, options)
ship assembled.

Notice

Max connection: Up to 10 fixtures.
Extended lengths require dimming
booster.

Dimming

- Compatible with 0 to 10 LV Controller using signal interface
- Dimming down to 5% of max. output
- Compatible with Lutron Grafix Eye, HomeWorks, & Diva when communicating via 0 - 10 volt signal
- Consult factory for additional dimming compatibility options.

Mounting

MDSL = Metal Bracket (Standard)

*ships with fixture

Finish

White powder coated finish (Standard)

Weight

DSL_14W = 1 lb
DSL_21W = 1.5 lbs
DSL_28W = 1.8 lbs

POWER SUPPLY & ACCESSORIES (PS)
(maximum run length is 10 fixtures.)
Extended lengths require dimming
booster. See Dimming Accessories.

MODEL NO.

DSL_14W = 14W Length 2.9' (895mm)
DSL_21W = 21W Length 3.92' (1195mm)
DSL_28W = 28W Length 4' (101.6mm)

COLOR / K

22K = 2200K
27K = 2700K
30K = 3000K
35K = 3500K
40K = 4000K
65K = 6500K
80K = 8000K
__ = No Lamp (leave blank)

VOLTAGE

120V = 120 volts

OPTIONS

C = Cover (Polycarbonate Diffuser)
ESL14CV = Cover for 14W
ESL21CV = Cover for 21W
ESL28CV = Cover for 28W

Accessories

CONNECTORS

__ESLCPL/XL = Direct Connector
__ESLPTC/XL = Connecting cable 6" (150mm)
__ESLPTC1/XL = Connecting cable 1' (300mm)
__ESLPTC2/XL = Connecting cable 2' (600mm)
__ESLPTC4/XL = Connecting cable 4' (1200mm)
__ESLPTC6/XL = Connecting cable 6' (1800mm)

POWER ACCESSORY

__MHWB/DSL = Metal hard wire box

PRODUCT SPECIFICATION EXAMPLE:

DSL_14W 22K 120V ESL14CV

MODEL COLOR/K VOLTAGE OPTIONS REQUIRED
POWER SUPPLY
& ACCESSORIES* *see Submittal Sheets