

## TuneLight 2

Dimmable LED for cabinet

Display for TuneLite



- LED컨버터 일체형으로 설치가 편리함
- 절연 회로 적용
- 진열대 또는 독서/싱크대 조명으로 사용 적합
- 디밍 가능





**다양한 특징**




**사양**

Model name	입력전압	소비전력	광속	광효율	연색성	색온도	사용온도
TUN7 40K-UNV-C90	AC100~240V	7W	455 lm	65 lm/W	Ra > 90	3,000K/4,000K/6,000K	0~45°C
TUN11 40K-UNV-C90	AC100~240V	11W	715 lm	65 lm/W	Ra > 90	3,000K/4,000K/6,000K	0~45°C
TUN15 40K-UNV-C90	AC100~240V	15W	975 lm	65 lm/W	Ra > 90	3,000K/4,000K/6,000K	0~45°C

**규격**

제품명	입력 전압(V)	소비 전력(W)	A (mm)	B (mm)	C (mm)
TUN7 40K-UNV-C90	AC100~240	7	526	52	18
TUN11 40K-UNV-C90	AC100~240	11	836	52	18
TUN15 40K-UNV-C90	AC100~240	15	1,145	52	18

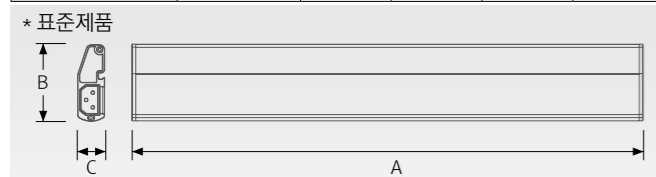

**주의**

- 최대연결 (Dimming) : 10pcs
- 최대연결 (Non-Dimming) : 400W
- 7W(57pcs), 11W(36pcs), 15W(26pcs)

**악세서리**

㉔ 연결선 (Non-Dimming)

TUNPTC/T	TUNPTC1/T	TUNPTC2/T	TUNPTC4/T	TUNPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)




㉕ 연결선 (Dimming)

DTUNPTC/T	DTUNPTC1/T	DTUNPTC2/T	DTUNPTC4/T	DTUNPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)



㉖ 전원선

TUNPC230/T




㉗ 전원선

TUNPC230/SM2/T




㉘ 오픈전원선

DTUNOPC230/T



㉙ 오픈전원선

DTUNOPC230/SM2/T

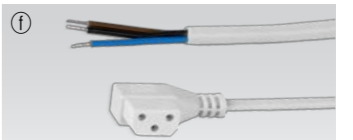

㉚ 직연결캡

TUNCPL



㉛ End Cap

TUN-CAP



㉜ 고정브라켓 : TUN-Bracket



㉝ 고정브라켓 : TUN-Bracket 1



㉞ 컨트롤러 (Dimming Switch)

FSA-P2D/BK



㉟ 컨트롤러 (Dimming Switch)

인터페이스(Interface)



㊱ 동작감지센서

