


EX Diva

Specify Accurate Presentation Angle




- 쉽고 빠르게 연결 가능한 제품
- DC 24V 드라이버와 함께 사용
- 사용 가능한 부속품으로 디밍 연출 가능
- 복합각 렌즈 사용 (40x100°)


다양한 특징

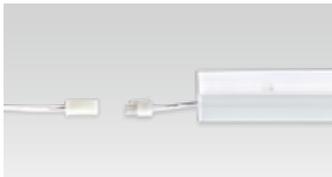

연결선 연결

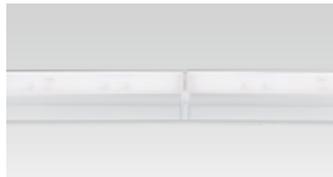

제품간 연결

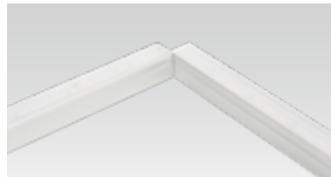


제품 구성

사양

제품명	입력전압	소비전력	광속	광효율	연색성	색온도	빔각도	사용온도
EXDV6 40K-24V	DC24V	6W	700lm	110lm/W	Ra>80	2,700K 3,000K 3,500K 4,000K 5,700K	40X100°	0~50℃
EXDV12 40K-24V		12W	1,400lm					
EXDV18 40K-24V		18W	2,100lm					
EXDV24 40K-24V		24W	2,800lm					
EXDV3L 57K-24V		3W	350lm					
EXDV6L 57K-24V		6W	700lm					
EXDV9L 57K-24V		9W	1,000lm					
EXDV12L 57K-24V		12W	1,400lm					


규격

* 표준제품

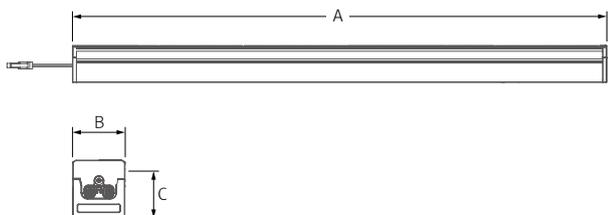


사이즈	A (mm)	B (mm)	C (mm)
EXDV6 40K-24V	284.4	26	29
EXDV12 40K-24V	566.4		
EXDV18 40K-24V	848.4		
EXDV24 40K-24V	1,142.4		
EXDV3L 57K-24V	284.4		
EXDV6L 57K-24V	566.4		
EXDV9L 57K-24V	848.4		
EXDV12L 57K-24V	1,142.4		

설치방법

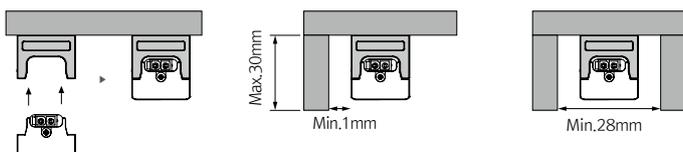

악세서리

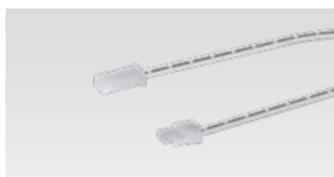

연결선 : HDPWPTC

- HDPWPTC : 150mm
- HDPWPTC1 : 300mm
- HDPWPTC2 : 600mm



오픈 전원선 : HDPWOPC

- 1,000mm / 2,000mm





마감캡

- EXDV-BRACKET-SIDECAP

배광

EXDV24 30K-24V (40X100°)

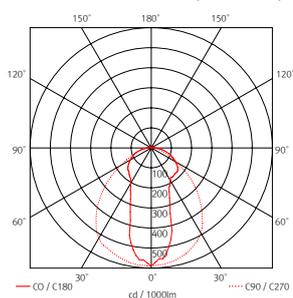

주의

- 최대연결 : 직렬 연결시 최대 120W / 컨버터 용량의 80% 이하 설치

제품명	컨버터별 최대 연결 개수		
	24V/100W	24V/200W	24V/350W
EXDV6 40K-24V	13	26	46
EXDV12 40K-24V	8	13	23
EXDV18 40K-24V	5	8	15
EXDV24 40K-24V	3	6	11