

FLX Stix NDPro

LED for Display, Cabinet, Furniture & Cove

Linear perfection with NDPro



- 연결부위에 Dark Spot 없음
- 슬림한 라인 조명
- 쉽고 빠르게 연결 가능한 제품
- 브라켓 또는 자석을 이용하여 간단하게 탈부착 가능
- 사용 가능한 부속품으로 디밍 연출 가능



DESIGN PLUS

light+building
March 2016 in Frankfurt

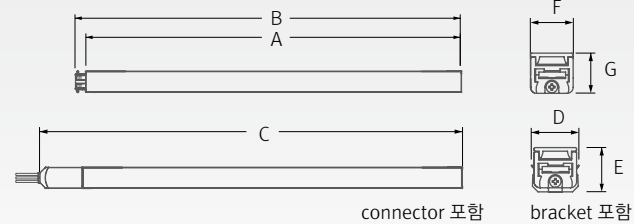
사양

제품명	입력전압	소비전력	광속	광효율	연색성	색온도	사용온도
NDP1 40K-24V-C90-L38	DC24V	0.5W	40 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃
NDP1 40K-24V-C90	DC24V	1W	80 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃
NDP3 40K-24V-C90	DC24V	3W	240 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃
NDP4 40K-24V-C90	DC24V	4W	320 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃
NDP7 40K-24V-C90	DC24V	7W	560 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃
NDP11 40K-24V-C90	DC24V	11W	880 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃
NDP15 40K-24V-C90	DC24V	15W	1,200 lm	80 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45℃

규격


제품명	입력전압 (V)	소비전력 (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
NDP1 40K-24V-C90-L38	DC 24	0.5	33.2	38.3	55.12	12	12.8	10.6	11.5
NDP1 40K-24V-C90	DC 24	1	94.7	99.8	116.9	12	12.8	10.6	11.5
NDP3 40K-24V-C90	DC 24	3	188.2	193.3	210.4	12	12.8	10.6	11.5
NDP4 40K-24V-C90	DC 24	4	279.2	284.3	301.4	12	12.8	10.6	11.5
NDP7 40K-24V-C90	DC 24	7	558.7	563.8	580.9	12	12.8	10.6	11.5
NDP11 40K-24V-C90	DC 24	11	837.7	842.8	859.9	12	12.8	10.6	11.5
NDP15 40K-24V-C90	DC 24	14	1,116.8	1,121.9	1,139	12	12.8	10.6	11.5

* 표준제품




제품명	A (mm)	B (mm)	C (mm)
FLC30-24V/KR	150	41	31
FLC75-24V/KR	180	60	32

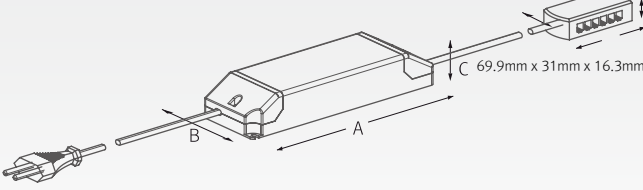
* LED Converter








제품명	A (mm)	B (mm)	C (mm)
FLC150-24V-FDH	220	54	32
FLC200-24V-FDH	235	71	45
FLC300-24V-F	252	71	45

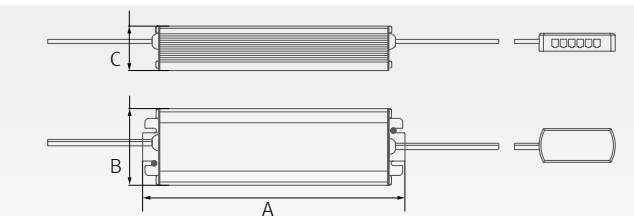

* Inline dimmer (디머)

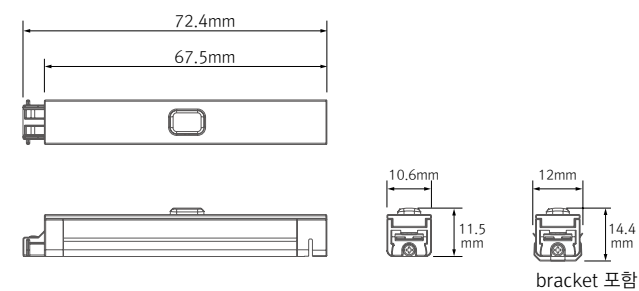

* Flexible connector

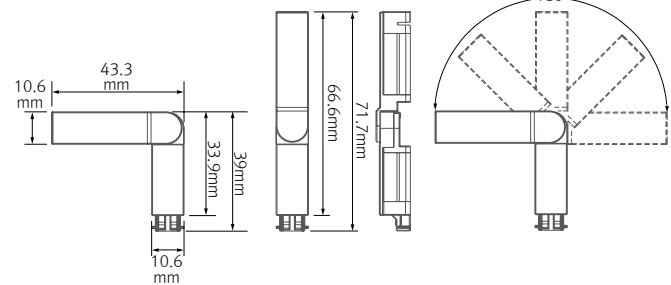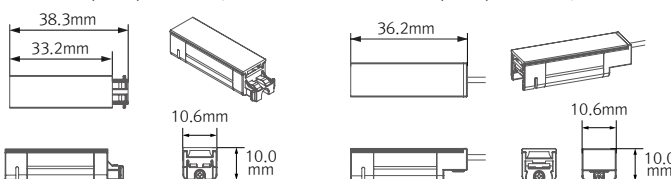* Corner In Connector
NDP1-(color)K-24V-C90-CI* Corner Out Connector
NDP1-(color)K-24V-C90-CO* Shortest Fixture (38mm)
NDP1-(color)K-24V-C90-L38* LED Power Cable
NDP1-(color)K-24V-C90-L38P

악세사리

㉓ 연결선

NDPPTC	NDPPTC1	NDPPTC2	NDPPTC4	NDPPTC6
150mm	300mm	600mm	1200mm	1800mm

㉔ 전원선 : NDPPC

Power cable (2,500mm)

㉕ 고정클립 : NDV-BRACKET 1

㉖ 각도클립 (15° & 45°) : NDV-BRACKET2

㉗ 측면연결방식 (3W) : NDP3 40K-24V-C90-S

㉘ Flexible Connector : NDP1 40K-24V-C90-FLEX

㉙ End cap : NDP-CAP

㉚ LED Converter

Part No	FLC30-24V/KR	FLC75-24V/KR
Capacity	30W 24V	75W 24V

㉛ LED SMPS

Part No	FLC150-24V-FDH	FLC200-24V-FDH	FLC300-24V-F
Capacity	150W 24V	200W 24V (IP66)	300W 24V (IP66)

㉜ Dimming Interface (1~10V) : FDC-L10

Max. 100W (100W/CH, 1CH)

㉝ Dimming Interface(0~10/1~10,DMX512)

FDA-L2M0 : Max. 200W (100W/CH, 2CH)

FDA-L5M : Max. 200W (100W/CH, 5CH)

㉞ Inline dimmer : FSH-L1D (NDP DIM)

Max 55W in a row

㉟ 도어 및 동작감지센서 (DC) : FLS-M24V

Voltage : DC 24V

㊱ 인체감지센서 (DC) : FLS-P24V

Voltage : DC 24V

㊲ LED Power cable : NDP1 40K-24V-C90-L38P

Fixture (36mm)

Power cable (2,500mm)

㊳ Corner In Connector : NDP1 40K-24V-C90-CI

㊴ Corner Out Connector : NDP1 40K-24V-C90-CO

