



FLXible Neon Lens 3D

Two way Bendable High Power Neon with Optic Lens


- 광학장치를 가진 유연한 등기구
- 수평 및 수직으로 자유롭게 휘어짐
- IP67로 실내 및 실외 설치 가능
- 고연색성 CRI > 90
- 다양한 빔각도 지원 (20°, 35°, 45°, 20X40°)

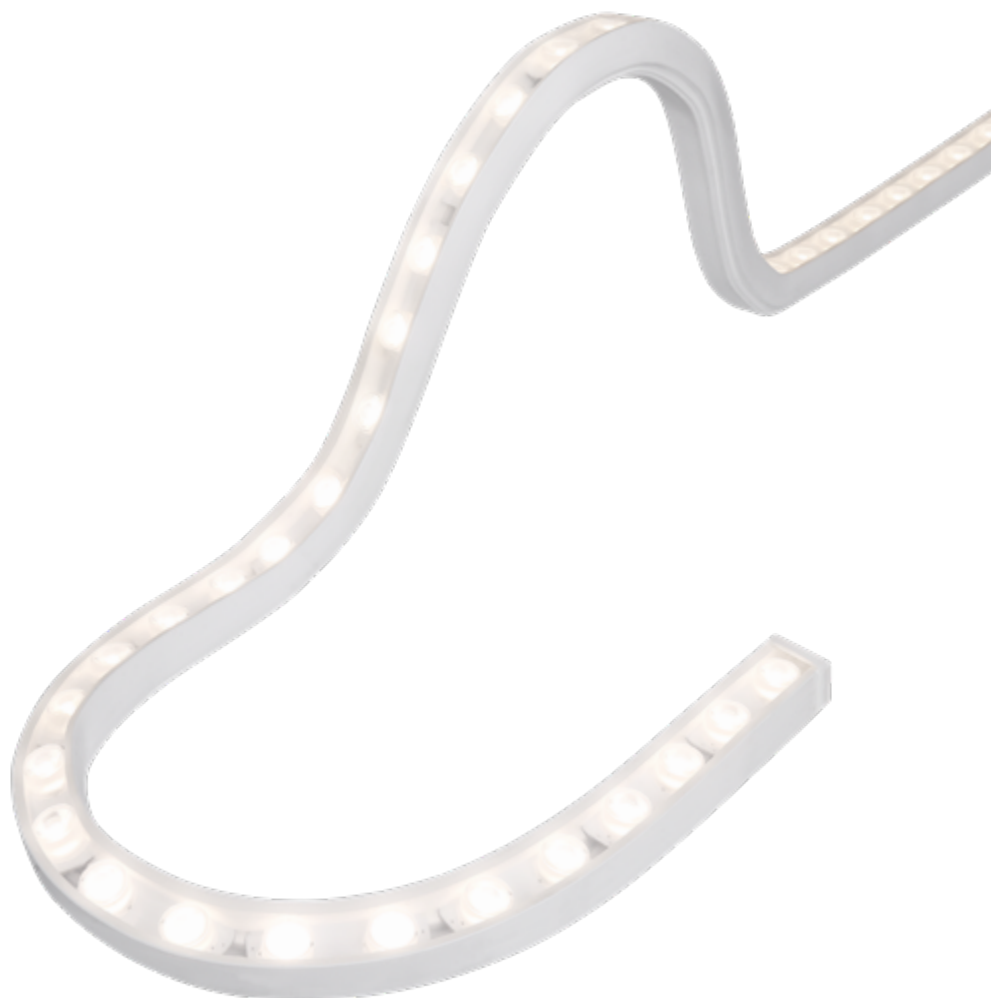

다양한 특징



정면



측면



자유로운 휘어짐




자유로운 휘어짐


사양

제품명	입력전압	소비전력	광속	광효율	연색성	색온도	사용온도	빔각	재질
FNL 3D 30K-24V-C90(1M)	DC 24V	20W/m	1,500lm	75lm/W	Ra > 90	2,700K 3,000K 4,000K 5,700K	-10°C to 45°C	20° 35° 45° 20x40°	실리콘
FNL 3D 30K-24V-C90(2M)		40W/m	3,000lm						
FNL 3D 30K-24V-C90(3M)		60W/m	4,000lm						
FNL 3D 30K-24V-C90(4M)		80W/m	5,500lm						
FNL 3D 30K-24V-C90(5M)		100W/m	7,700lm						

규격

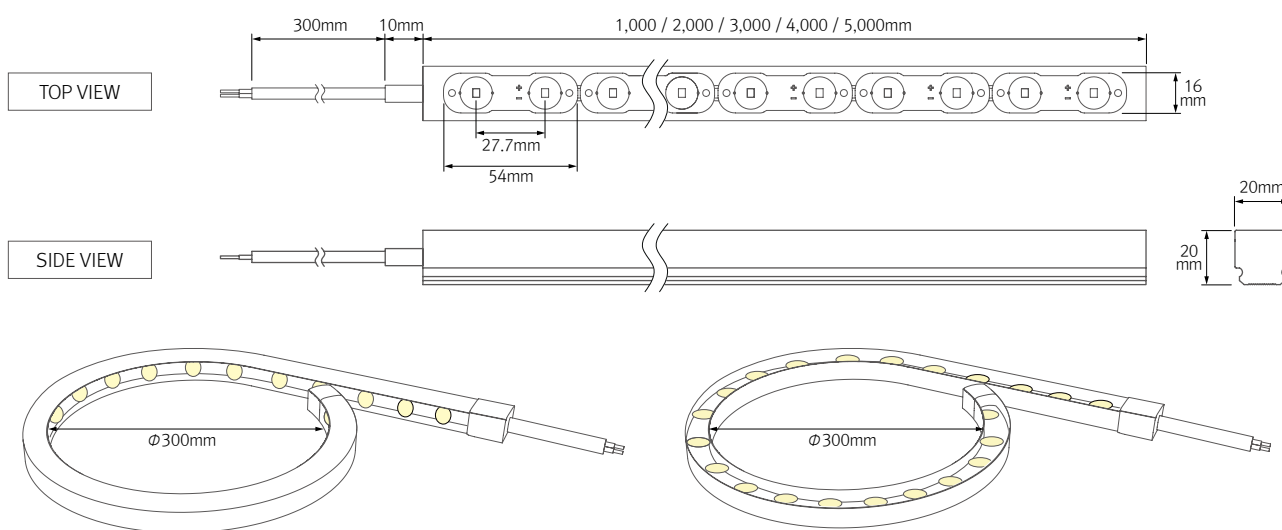


악세서리

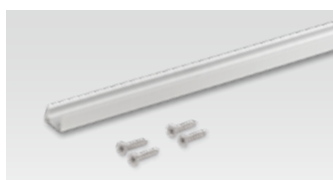

Flexible Neon Lens 3D Extrusion Line
· FNL 3D-EXL (1M)



각도조절 브라켓
· FNL 3D BRACKET2 (4pcs) for FNL 3D
· FNL 3D BRACKET2 (4pcs) for FNL 3D-EXL (1M)

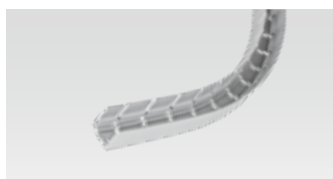

FNL 3D Flexible Extrusion Line
· FNL 3D-EXL-FLEX (1M)



고정 브라켓
· FNL 3D-BRACKET1, 1set = 4pcs

배광

