

FEELED
Bulb

For a variety of indoor lighting

Perfect lighting in the space of you



- 간편한 교체 (E26, E39 베이스로 백열전구와 호환)
- 눈부심이 없고 깨끗한 광색
- 낮은 온도에서도 밝은 밝기 유지
- 유지관리비용 절감






사양

제품명	입력전압	소비전력	역률	입력전류	광속	광효율	연색성	베이스	색온도
LBC20 30K-220V-E26	220V~, 60Hz	20W	0.9	100mA	1,400 lm	70 lm/W	Ra > 80	E26	3,000K
LBC20 57K-220V-E26	220V~, 60Hz	20W	0.9	100mA	1,600 lm	80 lm/W	Ra > 80	E26	5,700K
LBC30 30K-220V-E26	220V~, 60Hz	30W	0.9	150mA	2,100 lm	70 lm/W	Ra > 80	E26	3,000K
LBC30 57K-220V-E26	220V~, 60Hz	30W	0.9	150mA	2,400 lm	80 lm/W	Ra > 80	E26	5,700K
LBC30 57K-220V-E39	220V~, 60Hz	30W	0.9	150mA	2,400 lm	80 lm/W	Ra > 80	E39	5,700K
LBC40 30K-220V-E39	220V~, 60Hz	40W	0.9	200mA	2,800 lm	70 lm/W	Ra > 80	E39	3,000K
LBC40 57K-220V-E39	220V~, 60Hz	40W	0.9	200mA	3,200 lm	80 lm/W	Ra > 80	E39	5,700K

규격

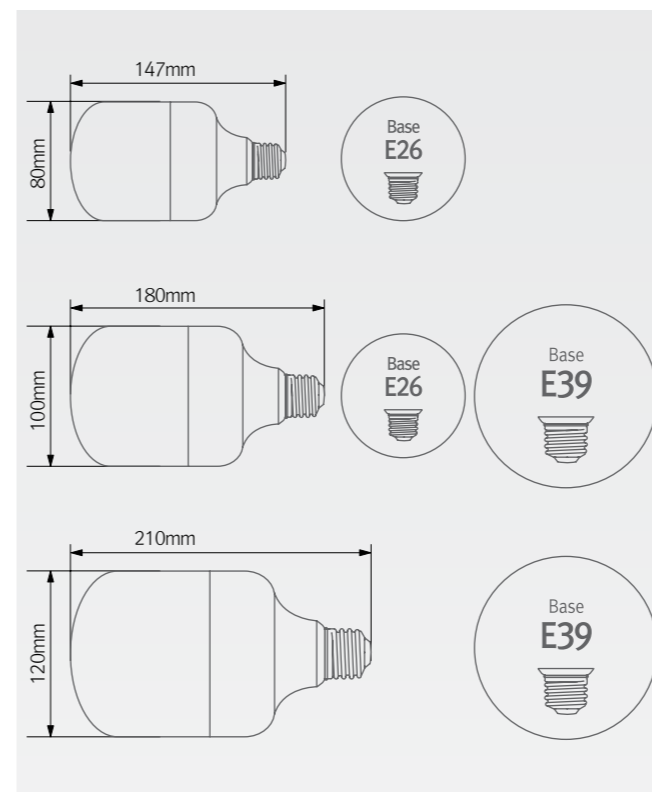

주의

- 조광기 사용 금지 (디밍회로 동작 부적합)
- 밀폐된 기구에는 내부온도가 높아지므로 사용 금지
- 가설등으로 적합

특징

