

FEELED

DownLight 6

For a variety of indoor lighting

Perfect lighting in the space of you



- 디스플레이 매장, 마트, 오피스 천장 등 다양한 적용 가능
- 기존 삼파장 램프 대비 30% 이상 전기료 절감
- 높은 광효율로 설치시 쾌적한 환경 조성 가능






사양

제품명	입력전압	소비전력	역률	정격입력전류	광속	광효율	연색성	빔각도	색온도	크기
LD10R6 57K-220V	220V/60Hz	10W	0.9	0.05A	950 lm	95 lm/W이상	Ra > 85 이상	100°	5,700K	W178xH83(mm)
LD15R6 57K-220V	220V/60Hz	15W	0.9	0.07A	1,425 lm	95 lm/W이상	Ra > 85 이상	100°	5,700K	W178xH83(mm)
LD20R6 57K-220V	220V/60Hz	20W	0.9	0.09A	1,900 lm	95 lm/W이상	Ra > 85 이상	100°	5,700K	W178xH83(mm)

규격

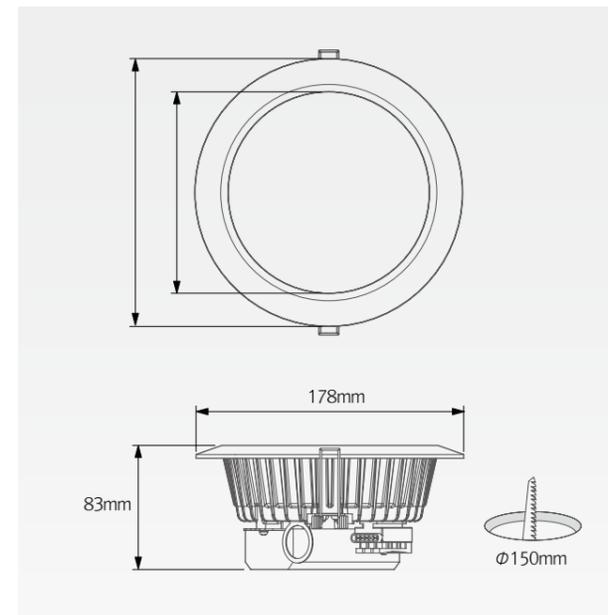

배광곡선 및 직하조도

