

DecoLamp LED

LED for Shops



LED DecoLamp

Feelux continues to evolve and innovate with the announcement of its new LED line. With the same formatting, connections and wiring as our fluorescent line, existing Feelux systems can be quickly replaced with any of our LED products. New applications will be installed correctly right from the outset with an LED system that's backed by the exacting design and engineering standards that have made Feelux the trusted industry leader that it is today.



Product Features

- AC power driver built in (SMPS is not needed)
- Ivory white diffuser
- Compatible with accessories for Decolamp


Notice

- Max connection : 270W
6W(45pcs), 11W(24 pcs)

Specification


- Frequency range : 50/60Hz
- Voltage : AC 100~130V
- Operating temperature : 32~113F(0~45°C)
- Lamp life : 40,000hr/70%
- Energy efficiency : 75 lm/W
- Available color : 2700K, 3000K, 3500K, 4000K, 6500K
- Color rendering Ra > 80
- Degree of protection IP20

Dimension

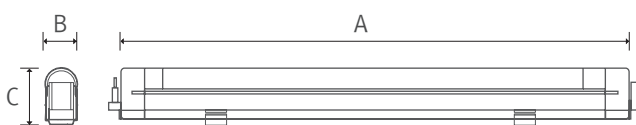

Model Name	Lamp Power (W)	A (inch)	B (inch)	C (inch)
LDL6 [color]K-120V-RM	6	12.48"	0.69"	1.28"
LDL11 [color]K-120V-RM	11	19.44"	0.69"	1.28"

Installation

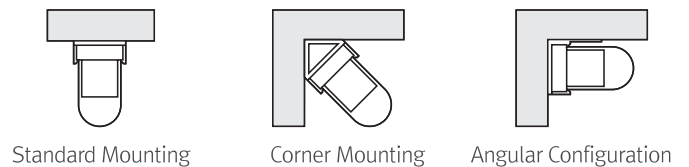

Accessories

① Connecting cables

DLPTC/XL	DLPTC1/XL	DLPTC2/XL	DLPTC 4/XL	DLPTC6/XL
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

② Direct connector

DLCPL/XL

Power cord

General type : ③ DLPC120/XL | Vertical type : ④ DLPC120/SM2/XL (straight type)

⑤ Mounting bracket

SL-BRACKET (180°), SL-BRACKET1 (45°), SL-BRACKET2 (90°)

⑥ On/off switch

DLSB/XL

⑨ Hard wire box : MHWB-DL

