

FEELUX

## FLX SpotDVS

Perfect solution for kitchen cabinets, displays and furniture

Super Slim LED Recessed Spotlight





## Product Features

- Linkable together and with Feelux FLX Stix NDV Linear LED
- Single 4W diode eliminates multiple shadows
- Virtually no heat emission and no UV radiation
- Available in silver, gold, white, black
- Friction fit in slim pocket with mounting spring option
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

## Specification

- Voltage : DC 24V
- Operating temperature : 32~113F (0~45° C)
- Lamp life : 40,000hr/70%
- Available color : 3000K, 4000K, 6000K
- Color rendering : Ra>85
- Energy efficiency : 80 lm/W
- Degree of protection IP20
- Total energy consumption of 4.3W



Various color








Single diode without multiple shadows



## Dimension

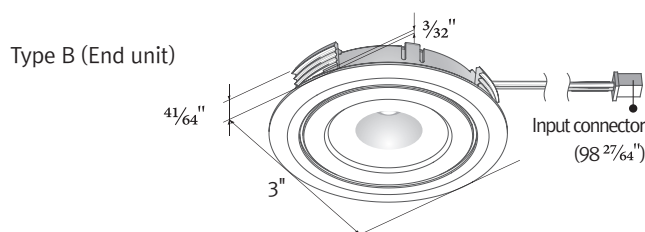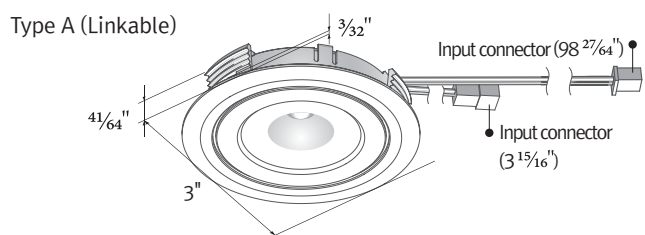

## Surface mount ring

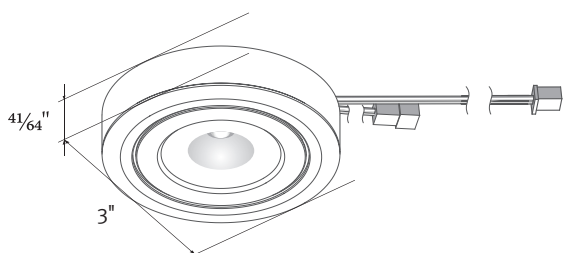


## Max. connection of linked fixtures

– LED Driver


Model Name	Max. units for LED driver		
	24V / 15W	24V / 30W	24V / 75W
DVS4A-[Color]k-24V-WT	3	7	17

## Installation


Linkable between Diva2 Spot & Diva2 Spot (Type A)




Linkable between Diva2 Spot & Diva2 (Type A)




Linkable between Diva2 & Diva2 Spot (Type A)




## Hole Diameter



## Mounting Spring Installation

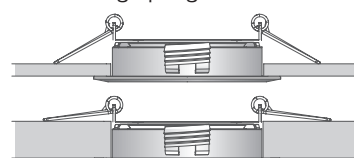


## Accessories

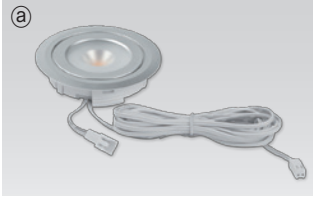


① FLX Spot DVS


White DVS4A-[Color]K-24V-WT	Black DVS4A-[Color]K-24V-BK
Silver DVS4A-[Color]K-24V-SV	Gold DVS4A-[Color]K-24V-GD



② Extension cable (Between Diva2 Spot & Diva2 Spot or 6 way distributor)  
DVS-Cable (A) : 98  $\frac{27}{64}$ "

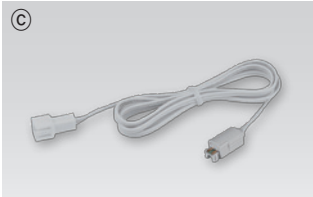


③ Connecting cable (Between FLX Spot DVS & FLX Stix NDV)  
DVS-Cable (B) : 39  $\frac{3}{8}$ "

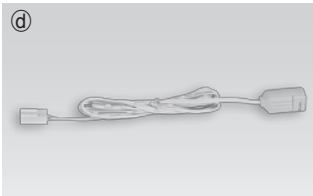

④ Connecting cable (Between FLX Stix NDV & FLX Spot DVS)  
NDVPC : 98  $\frac{27}{64}$ "



⑤ Dimming Interface (1-10V) : FDC-L10 (Max.100W)




⑥ Mounting spring: DVS-Spring



⑦ LED Driver with 6way distributor

Part No	FLC15-24V/XL	FLC30-24V/XL	FLC75-24V/XL
Capacity	15W 24V	30W 24V	75W 24V



⑧ Surface mount ring

White	Black	Gold	Silver
DVS-SR-WT	DVS-SR-BK	DVS-SR-GD	DVS-SR-SV



⑨ Deco ring

White	Black	Gold	Silver
DVS-DR-WT	DVS-DR-BK	DVS-DR-GD	DVS-DR-SV