

FEELUX

TUNELight 2

LED for cabinet & task



Dimming



TUNELight 2

Slim and simple design for under cabinet and general task lighting.



Installation



Mounting clip



Wooden shelf



Glass shelf




Product Features

- AC power driver built in
- Isolation circuit applied

Notice

- Max.connection(Dimming) : 10pcs
(Dimming signal booster available for a longer length)
- Max.connection(Non-Dimming) : 400W 7W(57 pcs), 11W(36 pcs), 15W(26 pcs)

Dimension

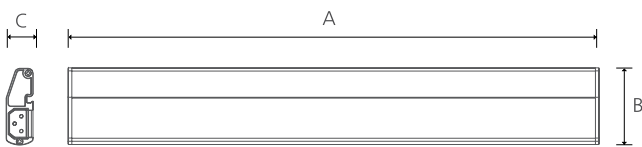

Model Name	Lamp Power (W)	A (inch)	B (inch)	C (inch)
TUN7-[Color]K-UNV	7	20.70"	2.04"	0.07"
TUN11-[Color]K-UNV	11	32.91"	2.04"	0.07"
TUN15-[Color]K-UNV	15	45.07"	2.04"	0.07"

Accessories

ⓐ Connecting cable for Non-dimming

TUNPTC/XL	TUNPTC1/XL	TUNPTC2/XL	TUNPTC4/XL	TUNPTC6/XL
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

ⓑ Connecting cable for dimming

DTUNPTC/XL	DTUNPTC1/XL	DTUNPTC2/XL	DTUNPTC4/XL	DTUNPTC6/XL
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

Power cord

General type : ⓐ TUNPC120/XL | Vertical type : ⓐ TUNPC120/SM2/XL

Connecting cable between fitting and hardwire box

ⓐ DSLTUNPTC/XL ⓑ Metal Hard wire box : MHWB-DSL

Ⓒ Direct connector : TUNCPL

Ⓓ End Cap : TUN-CAP

Mounting bracket

ⓑ TUN-Bracket ⓑ TUN-Bracket1

ⓓ Dimming switch

ⓔ Interface (0-10V, 1-10V, Phase to PWM)

Specification

- Frequency Range : 50/60Hz
- Voltage : AC 100-240V
- Operating temperature : 32~113F(0~45°C)
- Life time : 40,000hr/70%
- Energy efficiency : 75lm/W
- Available color : 2700K, 3000K, 3500K, 4000K, 6000K
- Color rendering index(CRI) : Ra > 80
- Degree of protection IP20

