




### Dimensions

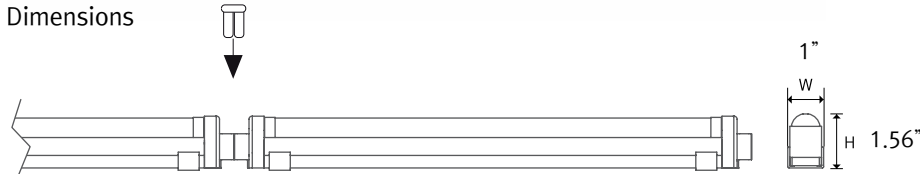

### Mounting

MDSL  
MDSL-BRACKET: 180°  
MDSL-BRACKET: 90°\*



\*ships w/ fixture

### Product Features

- High efficiency built-in programmed start ballast
- End of Lamp Life (EOL) protection
- Low profile rigid extruded aluminum body
- Quick connection system
- Daisy chain up to 10 fixtures together

### Specification

- Frequency range: 60Hz
- Voltage: 120V
- Power factor: >97%
- Color Rendering Index (CRI) = Ra > 80
- Lamp life : 20,000hr
- Tube diameter: 16mm(T5)
- Class of protection: I
- Degree of protection: IP20
- Operating Temperature: 0-45 °C  
32-113 °F

### Warranty

3 year warranty

### Certifications



### Beam Angle

240°

### Shipment

DimSlimLamps (fixture, lamp, options)  
ship assembled.

### Notice

Max connection: Up to 10 fixtures.  
Extended lengths require dimming booster.

### Dimming

- Compatible with 0 to 10 LV Controller using signal interface
- Dimming down to 5% of max, output
- Compatible with Lutron Grafix Eye, HomeWorks, & Diva when communicating via 0 - 10 volt signal
- Consult factory for additional dimming compatibility options.

### Mounting

MDSL = Metal Bracket (Standard)  
\*ships with fixture

### Finish

White powder coated finish (Standard)

### Weight

DSL\_14W = 1 lb  
DSL\_21W = 1.5 lbs  
DSL\_28W = 1.8 lbs

**POWER SUPPLY & ACCESSORIES (PS)**  
(maximum run length is 10 fixtures.)  
Extended lengths require dimming booster. See Dimming Accessories.

### MODEL NO.

DSL\_14W = 14W Length 2.9' (895mm)  
DSL\_21W = 21W Length 3.92' (1195mm)  
DSL\_28W = 28W Length 4' (101.6mm)

### COLOR / K

22K = 2200K  
27K = 2700K  
30K = 3000K  
35K = 3500K  
40K = 4000K  
65K = 6500K  
80K = 8000K  
\_\_ = No Lamp (leave blank)

### VOLTAGE

120V = 120 volts

### OPTIONS

C = Cover (Polycarbonate Diffuser)  
ESL14CV = Cover for 14W  
ESL21CV = Cover for 21W  
ESL28CV = Cover for 28W

### Accessories

#### CONNECTORS

\_\_ESLCPL/XL = Direct Connector  
\_\_ESLPTC/XL = Connecting cable 6" (150mm)  
\_\_ESLPTC1/XL = Connecting cable 1' (300mm)  
\_\_ESLPTC2/XL = Connecting cable 2' (600mm)  
\_\_ESLPTC4/XL = Connecting cable 4' (1200mm)  
\_\_ESLPTC6/XL = Connecting cable 6' (1800mm)

#### POWER ACCESSORY

\_\_MHWB/DSL = Metal hard wire box

### PRODUCT SPECIFICATION EXAMPLE:

DSL\_14W 22K 120V ESL14CV

MODEL COLOR/K VOLTAGE OPTIONS REQUIRED  
POWER SUPPLY & ACCESSORIES\* \*see Submittal Sheets