

Round Diffuser
Spot Free LB



PRODUCT FEATURES


- Seamless Illumination
- UltraSlim Profile with High Output
- Even Illumination of Surface
- Spot Free Lens Options
- Multiple Lengths for Easy Configuration
- End to End Connection
- Bracket or Magnetic Mounting
- Dimmable with Accessories

PRODUCT SPECIFICATIONS

- Voltage: 24VDC Constant Voltage Feelux or Approved Driver
- Operating Temperature: 32-113 °F (0-45 °C)
- Lamp Life: 40,000 hrs / 70%
- Available Color: 2700K, 3000K, 3500K, 4000K, 6000K
- Color Rendering: Ra > 80
- Efficiency: 75 lm/W - 6.3W/Ft - 472 lm/Ft
- IP20 Damp Location/Closet Approved
- Beam Angle: 120° / Round Lens - 220°
- Finish: Natural Aluminum (Standard)
- Warranty: 5 year Warranty
- Certifications



SPECIFICATION DIAGRAM

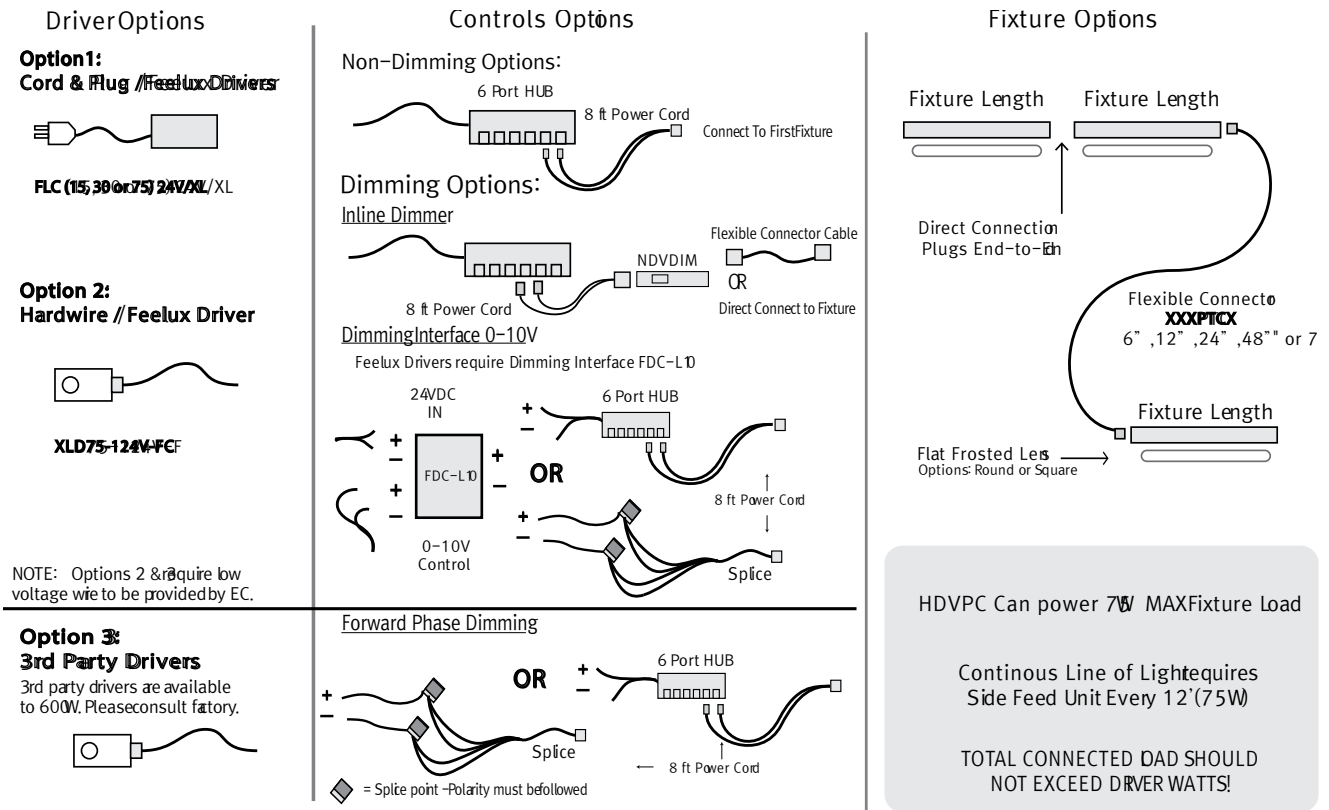


SPECIFICATION GUIDE ALL PARTS NEEDED FOR INSTALLATION WILL BE INCLUDED, FOR ADDITIONAL COMPONENTS ORDER SEPARATELY ON PAGE 2


| MODEL | COLOR | LENS | MOUNTING | CONFIGURATION | RUN LENGTH | DRIVER | CONTROLS | VOLTAGE |
|-------|---|---|---|---------------------------|--|---|---|------------------------------|
| HDV | | | | | ft. | | | |
| HDV | 27K -2700 K 30K -3000 K 35K -3500 K 40K -4000 K 60K -6000 K | ST -Flat Frosted RM -Round Milky SM -Square Milky | STD - Flat Brackets Magnets Included BK2 - 15° / 40° Brackets | S -Straight V -Varies* | RUN LENGTH IN FEET Fill out for every run section | CP - Cable/Plug HW - Hard Wire TD - 3rd Party Drivers Consult Factory | NDM Non-Dim IDM Inline Dim FDC 0-10V Interface FPH Forward Phase | 100V 120V 230V 277V |

*DRAWINGS & RUN LENGTH REQUIRED


COMPONENTS For additional components enter quantity below




Power Cable (8')
 _____ HDVPC



Side Feed Fixture
 _____ HDV3- _____ K24V-
 [Color]



Connecting Cable
 _____ HDVPTC (6")
 _____ HDVPTC1 (1')
 _____ HDVPTC2 (2')
 _____ HDVPTC4 (4')
 _____ HDVPTC6 (6')



Flexible Connector (1W)
 _____ HDV3- _____ K-24V-FLEX
 [Color]




In-Line Dimmer
 _____ HDVDIM




Dimming Interface
 100W 0/1-10V Signal
 _____ FDC-L10



6 Port Hub
 _____ D6P-HJB
 Included with Cord & Plug drivers
 Order seperatly for HardWire or 3rd P Drivers




Square Diffuser
 _____ HDV-3WSM (5.5")
 _____ HDV-4WSM (1')
 _____ HDV-7WSM (2')
 _____ HDV-11WSM (3')
 _____ HDV-15WSM (4')



Round Diffuser
 _____ HDV-3W-RM (5.5")
 _____ HDV-4W-RM (1')
 _____ HDV-7W-RM (2')
 _____ HDV-11W-RM (3')
 _____ HDV-15W-RM (4')




End Cap
 _____ HDV-CAP
 Included with fixture



Metal Mounting Brackets
 _____ HDV-BRACKET1
 Included with fixture



Metal Mounting Brackets
 Angled -15°/40° (BK2)
 _____ HDV-BRACKET2
 NOT ncluded with fixture



Connecting Brackets
 Fixture to Fixture
 _____ HDV-BRACKET3
 Included with fixture



Connecting Brackets
 Power Feed to Fixture
 _____ HDV-BRACKET4
 Included with NDVPC & all NDVPTC

CORD & PUG DRIVERS (100V to 230V)
 _____ FLC15-24V/XL _____ FLC30-24V/XL _____ FLC75-24V/XL

HARDWIREDRIVER (90V to 300V)
 _____ XLD75-124V-FC




Consult Factory for 3rd Party Drivers

(HDV)

| HDV DIMENSIONS | HDV24 | HDV18 | HDV12 | HDV6 | HDV3 |
|----------------|-------|----------|----------|------|-------|
| | 44" | 33 1/16" | 22 1/16" | 11" | 5.51" |


INSTALLATION DIAGRAM SHOWN HERE FOR DIMENSION PURPOSES ONLY. REFER TO PAGE 1 FOR SPECIFICATION GUIDE

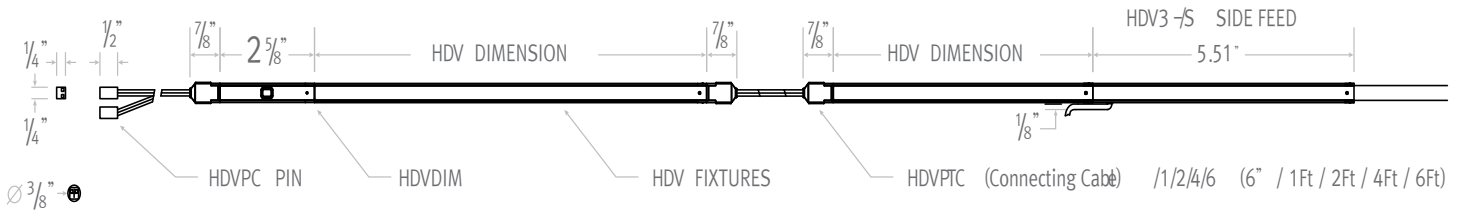


FIXTURE AND ACCESSORY DIMENSIONS



DIMMING OPTIONS

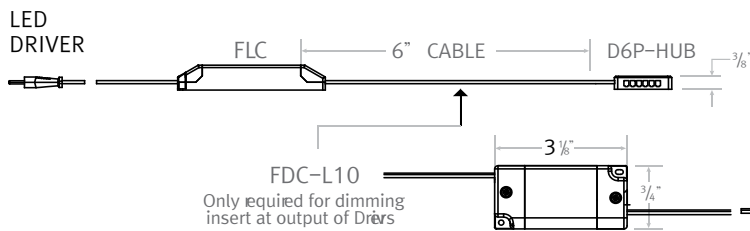


FLEXIBLE CONNECTOR

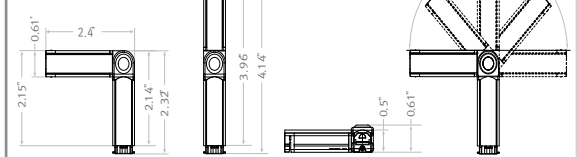


DRIVER OPTIONS

FLC PLUG-IN DRIVER SIZES

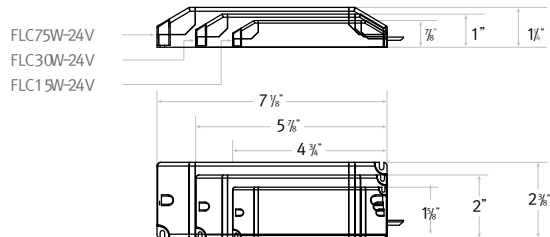

HARDWIRE 75W LED DRIVER

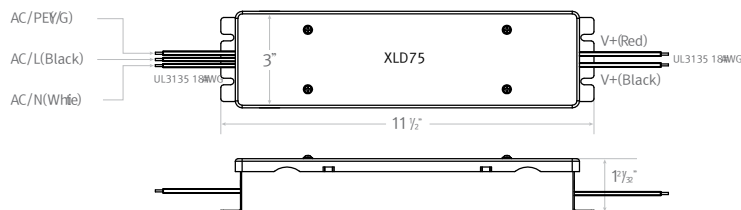

| SECTION DIMENSIONS | HDV PROFILE DIMENSIONS + | | |
|--------------------|--------------------------|--------------------|--------------------|
| | HDV-B&T1 | HDV-B&T2 40 Degree | HDV-B&T2 15 Degree |
| SECTION DIMENSIONS | 0.52" 0.59" | 0.63" 0.58" | 0.75" 0.69" |
| ROUND DIFFUSER | 0.83" 0.59" | 0.63" 0.89" | 0.92" 0.90" |
| SQUARE DIFFUSER | 0.83" 0.59" | 0.63" 0.87" | 1.01" 1.01" |