



DecoLamp

Once only available through private label, the DecoLamp T4 is now offered direct from Feelux. Successful for over a decade as the low profile solution for tight retail and residential applications, the highly efficient DecoLamp emits very little heat. With interchangeable lengths and modular connecting systems, the DecoLamp brings small spaces a bright, continuous flow of fluorescent light.

Product Features

- Built-in instant start ballast
- Extremely low profile measuring 17mm width and 31.5mm height
- Cool operation ideal for heat-sensitive item display
- Rigid aluminum extruded body and snap-in mounting brackets
- Polycarbonate diffuser that gives off a soft glow

Benefits

- Minimum space requirement low energy consumption, high energy efficiency
- Instant-on starting, no flicker, long lamp life : 12,000hrs
- Ballast and lamp shut down if fault present
- Allows easy connection, reduces installation time
- Satisfy world class standard, cULus listed (TUV certification for European model).


Application

- Remarkably low profile(T4 size 13mm) fits almost everywhere
- Kitchen, Cabinet, Showcase, Furniture

Noitce

Max. connection : 400W
7W(57pcs), 10W(40pcs), 18W(22pcs)

Installation

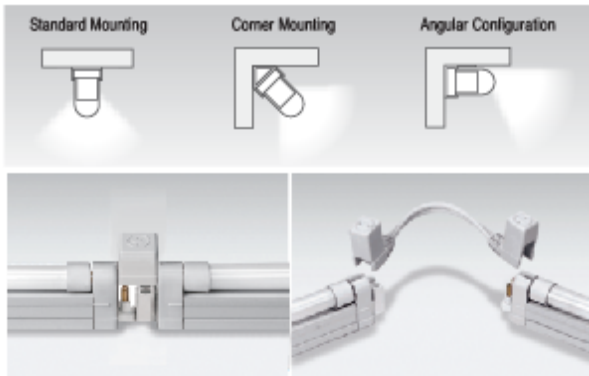

Specification

- Frequency range : 60Hz
- Voltage : 110~130V
- Power factor : >97%
- Color rendering : Ra>80
- Tube life: 12,000hr
- Tube diameter: 13mm(T4)
- Class of protection I
- Degree of protection IP20

External Dimensions



| Model Name | Lamp power (W) | L(inch) | W(inch) | H(inch) | H(inch) with diffuser | lm | Input Current(mA) |
|--------------|----------------|---------|---------|---------|-----------------------|------|-------------------|
| NDL7A4B12NC | 7 | 10 5/16 | 5/8 | 1 1/8 | 1 3/8 | 420 | 120 |
| NDL10A4B12NC | 10 | 13 3/8 | 5/8 | 1 1/8 | 1 3/8 | 700 | 160 |
| NDL18A4B12NC | 18 | 20 3/8 | 5/8 | 1 1/8 | 1 3/8 | 1305 | 250 |

Accessories

Ⓐ Connecting cables between fixtures

| DLPTC/XL | DLPTC1/XL | DLPTC2/XL | DLPTC4/XL | DLPTC6/XL |
|--------------|--------------|--------------|---------------|---------------|
| 6inch(150mm) | 1feet(300mm) | 2feet(600mm) | 4feet(1200mm) | 6feet(1800mm) |

Ⓑ Direct connector : DSLCPL

Ⓒ Power cord

| DLPC120/XL | DLPC120/SM2 |
|---------------|---------------------------------------|
| 6feet(1800mm) | 6feet(1800mm) with straight connector |

Ⓓ Fluorescent lamps

2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K,
Red, Green and Blue are available.

Ⓔ On/Off switch : DLSB/XL

Ⓛ Metal Bracket : MDL BRACKET

Ⓜ Diffuser

| DL7CV | DL10CV | DL18CV |
|-------|--------|--------|
| 7W | 10W | 18W |

Ⓨ Hard wire box

| DLHW/S/XL | DLHW/XL | MHWB-NDL |
|---------------------------|---------------|---------------------|
| Hard wire box with switch | Hard wire box | Metal hard wire box |

