



SlimLamp

After decades of top quality and performance known only through private labels, the SlimLamp standard T5 can now be purchased directly from Feelux. Your best choice for under-cabinet applications where low profile, inconspicuous lighting is a must, the SlimLamp is highly efficient with a built-in electronic ballast and low heat output, Modular connecting systems and interchangeable lengths allows the SlimLamp to create a long and continuous flow of fluorescent light for any tight space.

Product Features

- Built-in rapid start electronic ballast
- Linkable up to 400W together with only one power outlet
- Cool operation ideal for heat-sensitive item display
- Rigid aluminum extruded body and snap-in mounting brackets
- Polycarbonate diffuser that gives a soft glow

Benefits

- Low energy consumption, high light output
- Instant-on starting, no flicker, long lamp life : 20,000hrs,
- Superior strength with aluminum body
- Ballast and lamp shut down if fault present
- Satisfy world class standard, cULus listed (CE & TUV certification for European model)

Application

- Space for Modern design by using T5 size (16mm)
- Office, Hotel, Living room, Cabinet, Showcase, Furniture


Specification

- Frequency range : 60Hz
- Voltage : 110~130V
- Power factor : >97%
- Color rendering : Ra>80
- Tube life: 20,000hr
- Tube diameter: 16mm(T5)
- Class of protection I
- Degree of protection IP20

Noitce

Max. connection : 400W
8W(50pcs), 14W(28pcs), 21W(19pcs), 28W(14pcs), 35W(11pcs)

Installation

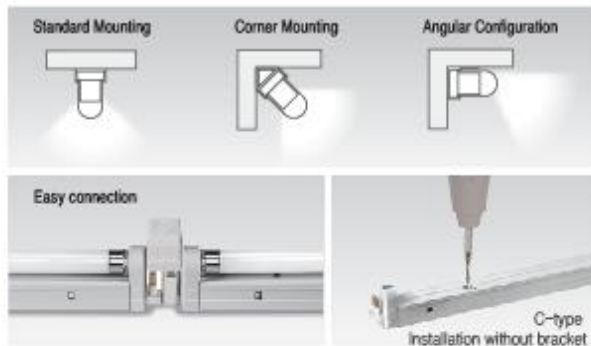

External Dimensions



Model Name	Lamp power (W)	L(inch)	W(inch)	H(inch)	H(inch) with diffuser	lm	Input Current(mA)
NSL8AB12NN	8	13 9/16	7/8	1 5/16	1 9/16	740	165
NSL14AB12NN	14	23 7/16	7/8	1 5/16	1 9/16	1350	190
NSL21AB12NN	21	35 4/8	7/8	1 5/16	1 9/16	2100	240
NSL28AB12NN	28	47 1/16	7/8	1 5/16	1 9/16	2900	290
NSL35AB12NN	35	58 7/8	7/8	1 5/16	1 9/16	3650	360

Accessories

Ⓐ Connecting cables between fixtures

DLPTC/XL	DLPTC1/XL	DLPTC2/XL	DLPTC4/XL	DLPTC6/XL
6inch(150mm)	1feet(300mm)	2feet(600mm)	4feet(1200mm)	6feet(1800mm)

Ⓑ Direct connector : DLCPL

Ⓒ Power cord

DLPC120/XL	DLPC120/SM2
6feet(1800mm)	6feet(1800mm) with straight connector

Ⓓ Fluorescent lamps

2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K,
Red, Green and Blue are available.

Ⓔ On/Off switch : DLSB/XL

Ⓛ Metal Bracket : MSL BRACKET

Ⓜ Diffuser

SL8CV	SL14CV	SL21CV	SL28CV	SL35CV
8W	14 W	21W	28W	35W

Ⓝ Hard wire box

DLHW/S/XL	DLHW/XL	MHWB-NDL
Hard wire box with switch	Hard wire box	Metal hard wire box





SlimLamp

After decades of top quality and performance known only through private labels, the SlimLamp standard T5 can now be purchased directly from Feelux. Your best choice for under-cabinet applications where low profile, inconspicuous lighting is a must, the SlimLamp is highly efficient with a built-in electronic ballast and low heat output, Modular connecting systems and interchangeable lengths allows the SlimLamp to create a long and continuous flow of fluorescent light for any tight space.

Product Features

- Built-in rapid start electronic ballast
- Linkable up to 600W together with only one power outlet
- Cool operation ideal for heat-sensitive item display
- Rigid aluminum extruded body and snap-in mounting brackets
- Polycarbonate diffuser that gives a soft glow

Benefits

- Low energy consumption, high light output
- Instant-on starting, no flicker, long lamp life : 20,000hrs,
- Superior strength with aluminum body
- Ballast and lamp shut down if fault present
- Satisfy world class standard, cULus listed (CE & TUV certification for European model)

Application

- Space for Modern design by using T5 size (16mm)
- Office, Hotel, Living room, Cabinet, Showcase, Furniture


Specification

- Frequency range : 60Hz
- Voltage : 110~130V
- Power factor : >97%
- Color rendering : Ra>80
- Tube life: 20,000hr
- Tube diameter: 16mm(T5)
- Class of protection I
- Degree of protection IP20


Noitce

Max. connection : 600W
14W(42pcs), 21W(28pcs), 28W(21pcs)

Installation

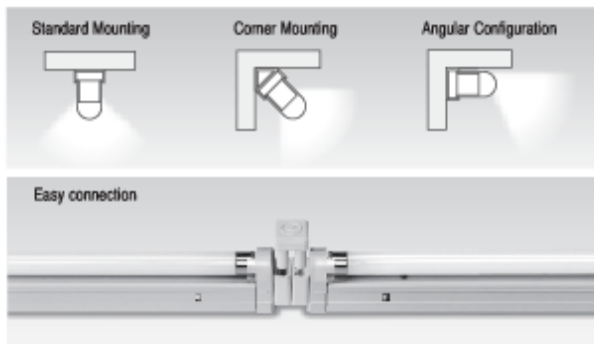

External Dimensions

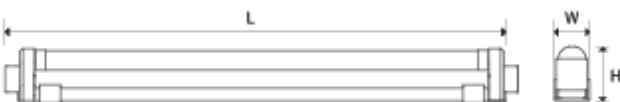

Model Name	Lamp power (W)	L(inch)	W(inch)	H(inch)	H(inch) with diffuser
ESL14AB12NN	14	23 7/16	1	1 9/16	1 10/16
ESL14AB12NN	21	35 4/8	1	1 9/16	1 10/16
ESL14AB12NN	28	47 1/16	1	1 9/16	1 10/16

Accessories

Ⓐ Connecting cables between fixtures

HPPTC/XL	HPLPTC1/XL	HPPTC2/XL	HPPTC4/XL	HPPTC6/XL
6inch(150mm)	1feet(300mm)	2feet(600mm)	4feet(1200mm)	6feet(1800mm)

Ⓑ Direct connector : DSLCPL

Ⓒ Metal hard wire box : MHWB-DSL

Ⓓ Power cord : HPPC120/XL

Ⓔ Fluorescent lamps

2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K,
Red, Green and Blue are available.

⓫ Metal Bracket : MESL BRACKET

⓬ Diffuser

HP14CV	HP21CV	HP28CV
14 W	21W	28W

