


TC-S2B

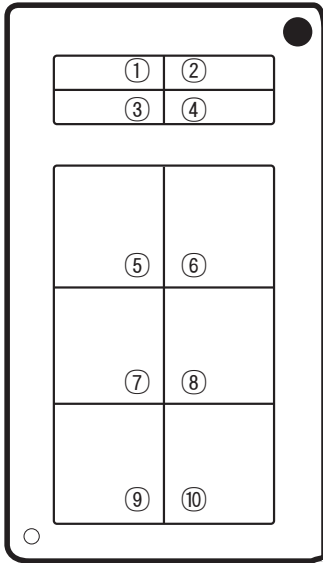

Operation manual

* Turn on/off

Press any button (⑤~⑩) to turn on the lamps.
Press the present scene button to turn off the lamps.

* Dimming control


- ① : 1st channel dimming down
- ② : 1st channel dimming up
- ③ : 2nd channel dimming down
- ④ : 2nd channel dimming up

* Scene control

Press button (⑤~⑩) once to recall each scene slowly.
Press button (⑤~⑩) twice quickly to recall each scene fast.
Press button (⑤~⑩) over 3 seconds to memorize the present scene.
Press button ⑥ and ⑨ at the same time to swing all scenes.
Press button ⑤ and ⑩ at the same time to turn to the initial setting in factory.

* SIH

If you connect Warm and Cool colors together then you can express SIH.

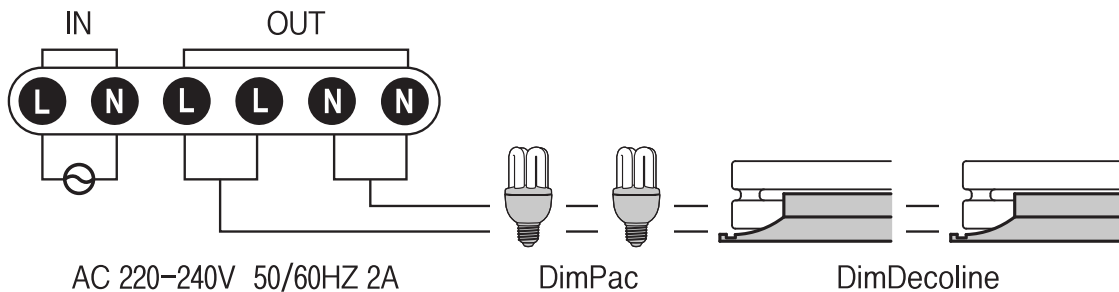

1. Please be sure to connect after power off.
2. Connect electric wires according to wiring method.
3. Plug in

⚠ CAUTION : Do not connect this product with unspecified compact fluorescent lamps or flurescent lamps. There is a chance of fire.

Wiring Method

1. Applicable electric wires:AWG 24-14 (0.2-2.08mm²)
2. Stripped length 4-5mm
3. Use electric wires after making it straight.
4. Push electric wires to the tip of a hole.
5. Connect N/L cables as specified. (L- brown, N-blue)

