

FLX Stix NDFree

No more transformer with FLX Stix NDFree

Slim, Simple, Safe!





- Easy and quick installation, Long connection
- LED driver is not required (AC Direct Powered)
- Innovative Slim design
- Safe connection with locking system
- No dark spot at the linkage point for seamless effect
- Line voltage dimming





FLX Stix NDFree Standard Output




Specification


Model Name	Power Input	Lamp Power	Power Factor	Lumens	Energy Efficiency	Color Rendering	Available Color	Operating temperature
NDF3 40K-230V-C90	AC 220-240V	2.5 W	PF > 0.9	212 lm	85 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF5 40K-230V-C90	AC 220-240V	5 W	PF > 0.9	340 lm	85 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF10 40K-230V-C90	AC 220-240V	10 W	PF > 0.9	720 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF15 40K-230V-C90	AC 220-240V	15 W	PF > 0.9	1,080 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C
NDF20 40K-230V-C90	AC 220-240V	20 W	PF > 0.9	1,440 lm	90 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K	0 ~ 45°C

Dimension

Model Name	Voltage Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
NDF3 40K-230V-C90	AC 220-240V	2.5	147	156	178.7	19	18	18	16.8
NDF5 40K-230V-C90	AC 220-240V	5	282.5	291.5	314	19	18	18	16.8
NDF10 40K-230V-C90	AC 220-240V	10	560.5	569.5	592	19	18	18	16.8
NDF15 40K-230V-C90	AC 220-240V	15	839	848	870.5	19	18	18	16.8
NDF20 40K-230V-C90	AC 220-240V	20	1,117	1,126	1,148.5	19	18	18	16.8

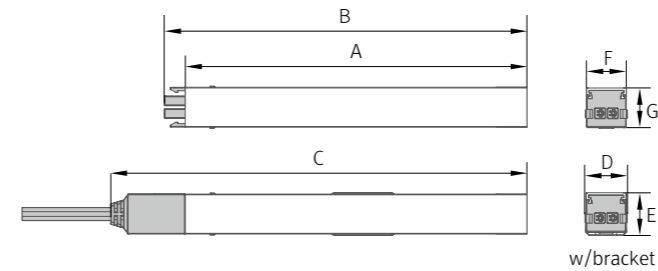


Installation

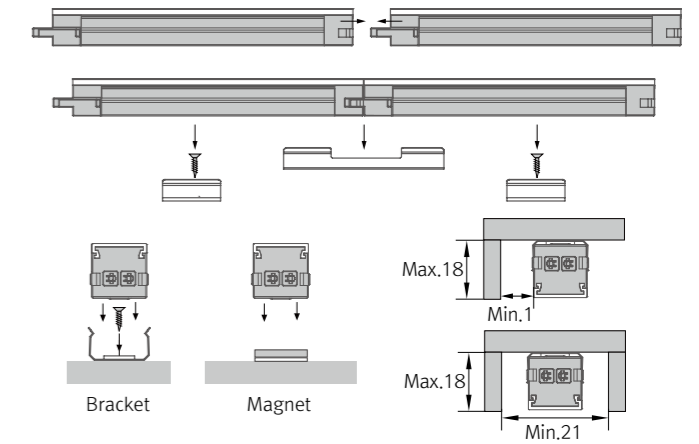

Max. connection

- 400W in one row (single power feed)

Connection

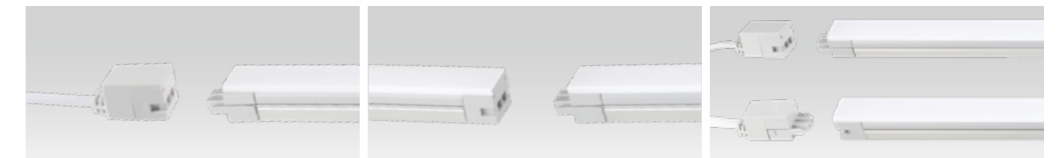

Accessories

Ⓐ LED Power connector : NDF3 40K-230V-PC
NDF3 fixture with 1,800mm power cords

Ⓑ LED open power connector : NDF3 40K-230V-OPC
NDF3 fixture with 1,800mm open power cords

Ⓒ Power cord : NDFPC/T (1,800mm)

Ⓓ Open power cord : NDFOPC/T (1,800mm)

Ⓔ Connecting cable : NDFPTC/T

NDFPTC/T	NDFPTC1/T	NDFPTC2/T	NDFPTC4/T	NDFPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

Ⓘ Mounting brackets : NDF-BRACKET1

Ⓙ Angle bracket (15° & 40°) : NDF-BRACKET2
1Set=1pcs

Ⓚ Connecting bracket : NDF-BRACKET3

Ⓛ End Cap : NDF-CAP

